




## ImagePro 8758 Data/Video projector

- Network Connection, RJ-45
- XGA resolution
- 2200 lumens brightness
- HDTV compatible
- Digital keystone correction, Horizontal & Vertical
- Very quiet operation
- LCD with status Information

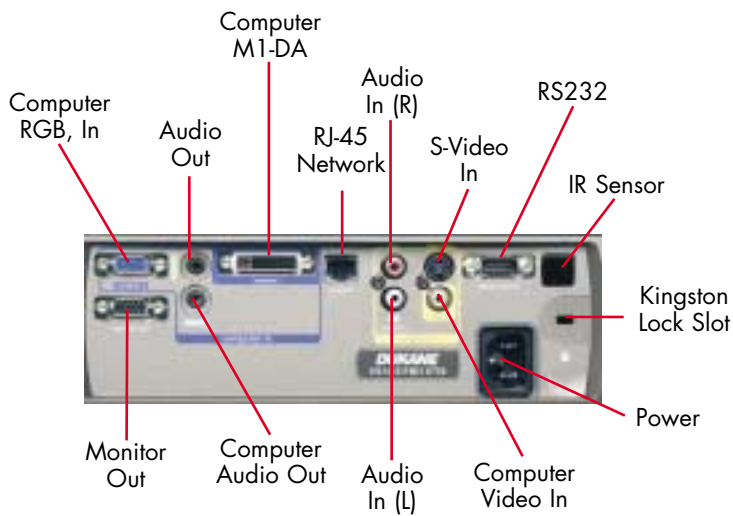

- **Business**
- **Education**



View the status of your projector via the LCD window on top of the unit.

# 8758

## DUKANE

# ImagePro 8758 Portable LCD projector

## A way to present your images anywhere

The Dukane ImagePro 8758™ offers best-in-class capabilities with intuitive controls. Get outstanding color saturation and brightness that lasts. Use the network connection to set up any meeting room by remote monitoring and control.

The high-end features mean that you do less work. Automatic horizontal and vertical keystone correction, plus ceiling detection ensure your image is proper, with no work on your part. Automatic synchronization with computer and video sources allows for quick and smooth transitions.



## Key features:

- Light weight
- 2200 lumens brightness
- XGA resolution
- Simple, icon based menu
- HDTV compatible
- Zoom lens
- Automatic ceiling detection
- Network connection
- Picture-In-Picture (PIP)
- LCD window with status information

8758 Image Size Distance Table

Image Size 4:3		Throw Distance		
Diagonal	Width	Min.	Max.	a*
Inches	Inches	Feet	Feet	Inches
40	32	4.3	5.1	1.5
60	48	6.4	7.6	2.0
100	80	10.7	12.7	4.0
120	96	12.9	15.3	5.0
150	120	16.1	19.1	6.5
210	168	22.5	26.7	7.0

a\* = Distance Below Lens Center line.

## Specifications

## **8758**

Image Element	0.8" polysilicon TFT x3, MLA
Brightness	2200 ANSI lumens
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	400 to 1
Scanning Frequency	fh 16-110 kHz, fv 50-85 Hz
Lens	Manual zoom, 1.2X
Lens Throw Ratio	1.61 - 1.91 to 1 throw distance to image width
Keystone Correction	Digital, vertical +/-25 deg, Horizontal +/-15 deg
Computer Compatibility	SVGA, VGA, XGA, and SXGA Compressed, Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV, 1080i, 1080i/50 Hz, 720p, 480i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB – using M1-USB
Picture in Picture, PiP	Yes, video in computer
Other Feature	Mask reveal for images
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	170 W UHP
Lamp Life	2000 hours
Audio	2 speaker, 2 watt
Throw Distance	60" to 400"
Screen Size, diag.	40" to 300"
Inputs, Video	Component, via adapter for M1-D/A S-video, Min DIN 4-pin, Composite video, RCA x 1 Audio, Stereo, RCA x 2, for c-video
Inputs, Computer	1 x RGB Signal: D-sub, 15 pin Computer, Stereo Mini Audio x 1 M1-D/A Computer (DVI)
Outputs Monitor	15 pin, D-sub
Outputs, Control	15 pin D-Sub, RS-232 Audio out, Stereo mini jack USB, mouse control w M1-D/A
Network connection	RJ-45 port
Security	Kensington slot
Fan Level	Ultra quiet, 34 dB normal
Operating Temp.	50 to 95 deg. F
Power	AC 100-240V, AC 50/60 Hz, 260 watt
Size (WxHxD)	11.6" x 4.1" x 10.3"
Weight	7.5 lbs.
Shipping Weight	14 lbs.
Carton Size	16" x 16" x 14"
Accessories Included	Remote control, batteries, power cord, M1-D/A computer and USB cable, 3.5 mm audio cable, RCA x 3 cable, operators manual and soft carry case
Safety	UL/CUL, FCC/DOC Class A,
Optional Accessories	Lamp; 456-8758 Rolling briefcase; 185-406, Ceiling mount, universal; PJF-UNV-S M1 to Component adapter; SP-M1-ADPT
Two (2) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year <i>Peace-of-Mind Loaner Program.</i>	

# DUKANE

Audio Visual Products  
2900 Dukane Drive  
St. Charles, Illinois 60174  
www.dukcorp.com/av



Toll-free: 800-676-2485  
Fax: 630-584-5156  
E-mail: avsales@dukcorp.com

ImagePro is a registered trademark of Dukane Corporation

# 2YR

#11626-C-04