




ImagePro 8911 Portable LCD Projector

- 2700 lumen brightness
- XGA resolution
- 400:1 contrast ratio
- Four 3 watt speakers
- Auto vertical keystone correction
- Remote with laser pointer
- Network capability (RJ45)

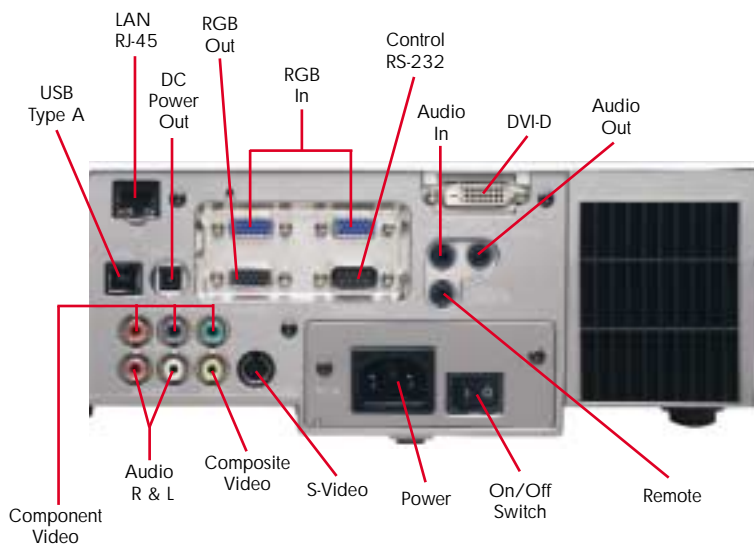


8911 DUKANE

ImagePro 8911

Premium-quality LCD projector

The Dukane ImagePro 8911 is a powerful yet versatile LCD projector designed to open new possibilities in multimedia projection. Bright enough for most large classrooms and conference rooms, the 8911 is sure to impress with realistic colors, sharp contrast, and brilliant images.

Save money with the 8911 by eliminating the need for additional external speakers. By incorporating four built-in 3W speakers, which is typically sufficient for most classrooms, you can be sure your message is heard. In addition, full connectivity and networking capabilities make this one of the most versatile and efficient projectors available today.



Key features:

- 2700 lumens brightness
- XGA (1024 x 768) resolution
- 400:1 contrast ratio
- Vibrant rich colored images
- Four 3 watt speakers
- Automatic vertical keystone correction
- Remote with laser pointer
- HDTV compatible
- Five Year Warranty and One Year Peace of Mind Service

8911 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	5.9	7.8
60	48	9.0	11.8
80	64	12.1	15.8
100	80	15.2	19.8
120	96	18.3	23.8
150	120	22.8	29.9
200	160	30.5	39.9
250	200	38.2	49.9
300	240	45.9	59.9

Throw Ratio (distance to width) 2.3 3.0

DUKANE

Audiovisual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com/av



Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com

#11679-G-05 ImagePro is a registered trademark of Dukane Corporation

Specifications

Image Element	0.8" polysilicon TFT x3, MLA
Brightness	2700 ANSI lumens 2100 (whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	400:1
Scanning Frequency	fh 15-91 kHz, fv 50-120 Hz
Lens	Manual zoom (F=1.7 to 2.1), 1.3X
Lens Throw Ratio	2.3 -3.0 :1 throw distance to image width
Keystone Correction	Digital, vertical +/-15 deg, automatic horizontal +/- 5 deg
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, and SXGA Compressed, MAC16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 575i, 480i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	230W UHB
Lamp Life	2000 hours
Audio	3.0 W x 4
Throw Distance	46" to 364"
Screen Size, diagonal	40" to 500"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 Audio, Stereo, RCA x 2, (L/R)
Inputs, Computer	(2) RGB Signal: D-sub, 15 pin (1) DVI (digital RGB) Audio, Stereo mini jack x 1
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack x 1
Outputs, Control	9 pin D-sub Connector, RS232C USB connector x 1 3.5mm mini jack (wired remote control)
Network	RJ-45 port / 10Base-T
Security	Kensington slot
Fan Level	38dB, (33dB in whisper mode)
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, 370 watt
Size (WxHxD)	13.2" x 3.7" x 10.4"
Weight	8.3 lbs.
Carton Size	14.3" x 16" x 17.3
Shipping Weight	20.2 lbs.
Accessories Included	Remote control w/ laser pointer, batteries, power cord, RGB Cable, filter cover, operator/safety manual, soft case.
Safety	UL, C-UL, FCC Class B, CE, TUV
Optional Accessories	Lamp 456-8915 Rolling briefcase; 185-406, Ceiling mount , universal; PJF-UNV-S

Five (5) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply).

Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR