

8302

ImagePro 8302 Portable DLP Projector



The ImagePro 8302 is a bright (2600 lumens) versatile DLP projector with Brilliant Color™, and HDTV compatible

8302 FEATURES

- 2600 lumen brightness
- XGA resolution (1024 X 768)
- Brilliant Color™ DLP Technology
- Filter Free Design
- Contrast ratio of 2200 to 1
- Front venting for cool presentations
- HDTV ready, DVI-I, HDMI input
- Audio pass-through for volume control when operating
- Dukane 5-Year Warranty

THE ALL NEW

DUKANE

Education. Presentation. Inspiration.

www.dukcorp.com




Convey by Dukane delivers control of classroom audio visual assets in sync with our AClick Student Response System. Experience tomorrow's classroom today with Convey

Visit www.convasystems.com.

ImagePro 8302 Portable DLP projector

Back Panel

Connections

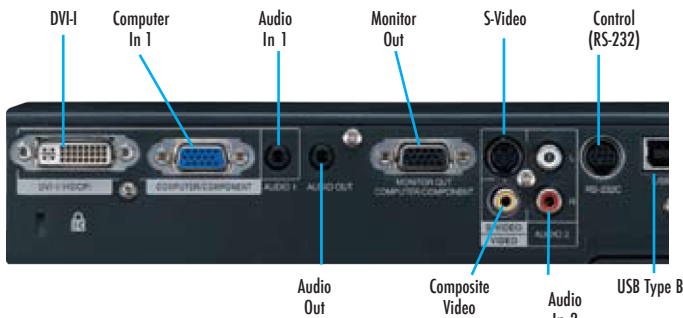

FEATURES

- XGA (1024 x 768) resolution
- 2600 ANSI lumens of brightness
- 2200:1 contrast ratio
- 2 watt speaker
- Brilliant color images
- Vertical keystone correction
- Only 6.4 lbs.
- No filter to service
- Easy lamp replacement through bottom door
- Controllable remotely
- Five Year Warranty and One Year Peace of Mind Service

8302 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	4.9	5.7
60	51	7.3	8.5
80	63	12.3	14.2
100	85	18.6	21.3
120	102	24.6	28.3
Throw Ratio (distance to width)	1.84	to	2.13

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av

toll-free
fax
e-mail



#080040-H-08.1

ImagePro is a registered trademark of Dukane Corporation

Specifications	8302
Image Element	0.55" DND DLP
Brightness	2600 ANSI lumens (2100 econo mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	2,200:1
Scanning Frequency	fh 15-100 kHz, fv 45-85 Hz
Lens	Manual zoom
Lens Throw Ratio	1.84-2.13:1 throw distance to image width
Keystone Correction	Digital vertical +/-15°
Aspect Ratio	4:3 native, 16:9 selectable
Computer	VGA, SVGA, XGA, SXGA, UXGA
Compatibility	Mac 13, Mac 16, Mac 21/19
Video Compatibility	NTSC, PAL, PAL-M SECAM, HDTV1080i/p, 720p, 480i/p,
Closed Caption	CC1, CC2
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	230W UHB
Lamp Life	2000 hours (4000 hours econo mode)
Audio	2W speaker
Throw Distance	4'11" to 36'
Screen Size, diagonal	40" to 300"
Inputs, Video	(1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 (2) Audio, Stereo, RCA x 2, (L/R)
Inputs, Computer	(1) RGB Signal: D-sub, 15 pin, DVI-I (1) DVI-I (1) Audio, Stereo mini jack
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack x 1
Outputs, Other	DIN Connector, RS232 USB type B (remote mouse only)
Security	Kensington slot
Fan Level	35dB, (29dB in econo mode)
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, 303 watt
Size (D & W)	10.7" x 10.5" x 3.5"
Weight	6.4 lbs. (2.9 kg)
Carton Size	15" x 15" x 9"
Shipping Weight	12 lbs.
Accessories Included	Remote control, batteries (AA), power cord, Computer cable, User manual, CD-ROM, lens cap
Safety	FCC-A, UL/CUL
Optional Accessories	Lamp 456-8302 Ceiling mount, universal, RPA-U

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR