

Seattle X30N/W

Up Close and Professional

The Seattle X30N/W is a top performing projector for short-throw presentations.
Capable of projecting an 80" image from 75" away.
Remove the threaded lens for normal throw applications.



- Short throw
- Robust input panel
- LAN control
- Password security
- Closed caption
- RS232
- Optional harsh enviro filter
- Side changing lamp & filter
- Quick startup and shutdown
- 8 watt speaker



Seattle X30N/W

Specifications




BRIGHTNESS

3000 Lumens (Standard)
1950 Lumens (Economy)

RESOLUTION

1024 x 768 XGA (Native)
1600 x 1200 UXGA (Compatible)

DISPLAY TYPE

0.63" LCD x 3


CONTRAST RATIO

500 :1

ASPECT RATIO

4:3 Native
16:9 Compatible

THROW RATIO

1.0 ~ 1.2 (x screen width)

PROJECTION LENS

Manual Zoom & Focus

ZOOM RATIO

1.2:1

DIAGONAL IMAGE SIZE

40" - 300"
101.6cm - 762cm

THROW DISTANCE

3.33' - 25'
1.01cm - 7.62cm

KEYSTONE

+/- 30° Vertical

LAMP

230 watt UHP

LAMP LIFE

2000 (Standard)
3000 (Economy)

INPUTS

VGA
DVI-I
Composite
S-Video
Component
Audio x 2 (3.5mm)

OUTPUTS

VGA
Audio (3.5mm)

PROJECTOR CONTROLS

USB
RS232 (9-pin)
RJ45 LAN Connection

COMPATIBILITY

VGA, SVGA, XGA, SXGA, UXGA,
Mac

EDTV / SDTV / HDTV

480i/p, 576i/p, 720p, 1080i

FCC CERTIFICATION

FCC-B, UL, cUL, TUV, CD, CE, CCC

VIDEO COMPATIBILITY

NTSC, NTSC 4.43, PAL M/N 60, SECAM

AUDIO

1 x 8w Mono Speaker

DECIBEL RATING

33 dB (Standard) / 30 dB (Economy)

H-REFRESH RATE

31-92 kHz

V-REFRESH RATE

48-120 Hz

POWER SUPPLY

AC 100 ~ 240 Volts
50-60Hz (Auto ranging)

POWER CONSUMPTION

310 Watts (Standard)
<5w standby

DIMENSIONS (WxDxH)

12.8" x 10.24" x 3.8"
32.5cm x 26cm x 9.7cm

WEIGHT

7.3 lbs
3.3 kg

WARRANTY

3 year parts & labor / 90 day lamp



Special features of the Seattle X30N/W include:

Short Throw Lens – Ideal for small rooms or short throws.

LAN Connectivity– For network installation. Manage your projectors through a web-based platform.

Quick Start Up and Shut Down – Set up and present quickly, and only a 10 second cool down cycle when you finish.

Side Changing Lamp and Filter – Easy lamp installation and projector maintenance. No need to remove the projector from ceiling mount position.

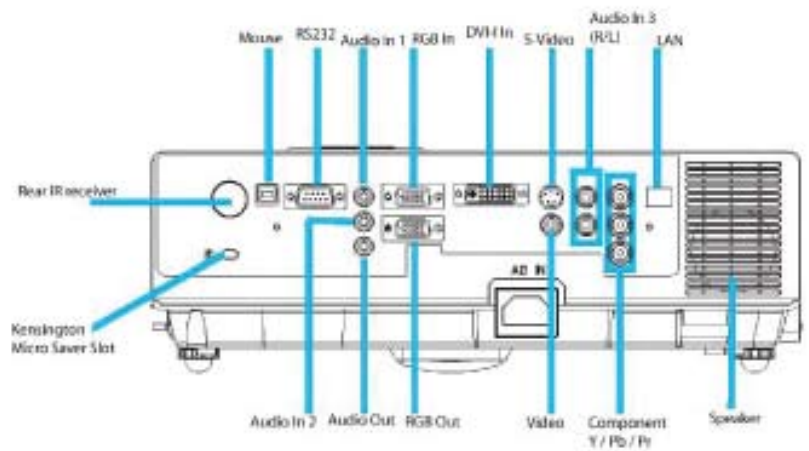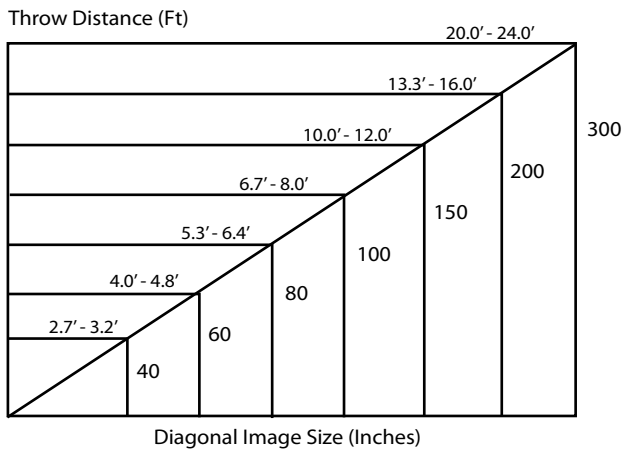

www.boxlight.com
360.464.2119