


# Stewart

Filmscreen Corporation®

*P i c t u r e P e r f e c t*

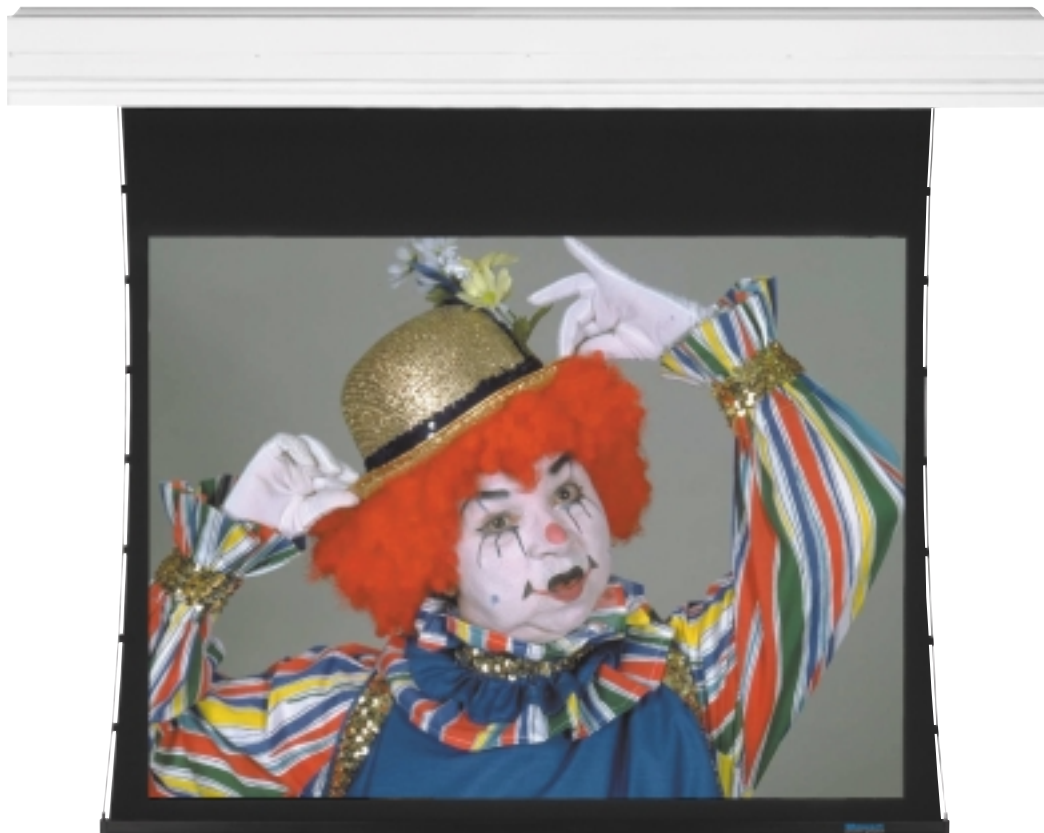

## Stealth Trap Door ElectriScreen

### **Hidden from View**

The Stealth Trap Door ElectriScreen utilizes a technologically advanced electric roll-up screen. The screen retracts into an obscure trap door that mounts flush with the ceiling surface and can be painted to blend perfectly, effectively hiding its existence.

### **Insist on the Best**

Optimize your Stealth Trap Door ElectriScreen with a Stewart Academy Award® winning screen material, securely attached using our exclusive Tab-Guy tensioning system designed to ensure a smooth flat image and prevent curl up.

### **Motorized Roller System**


Stewart's motorized roller system provides a quite, reliable screen operation that can be activated by a switch, infrared or remote control, or a projector screen trigger.

### **Trust Stewart**

Stewart Filmscreen is synonymous with high quality materials, superior craftsmanship and long, trouble-free product life. Since every Stewart Filmscreen product is hand crafted, custom sizes and configurations can also be accommodated. Call Stewart Filmscreen today and we will build one for you.

# Stealth Trap Door ElectriScreen Specifications

Dimensions represented in inches (") and millimeters (mm). Weights represented in pounds (lbs.) and kilograms (kg.)



Formats	Min-Max Height	Min-Max Width
Video Format	36"-72"	48"-96"
HDTV	40.5"-54"	72"-96"
Widescreen	39"-48"	72"-89"

(Size height and width depends on model chosen.  
Custom sizes available with no extra charge.)

## Case Material

Aluminum Extrusion

## Specifications

Case Colors	White
Batten Colors	Black, White

## Screen Materials

Front Projection	Gain	Viewing Angle
GrayHawk	0.95	160°
Studiotek / Ultramatte 130	1.3	160°
FireHawk	1.35	100°
Ultramatte 150	1.5	140°
Videomatte 200	1.8	120°
Ultramatte 200	2.0	120°

### Perforation (Front Projection)

THX Certified MicroPerf	Optional
CinePerf	Optional

Rear Projection	Gain	Viewing Angle
Aeroview 100	1.0	180°
Filmscreen 100	1.0	100°-120°
Lumiflex 130	1.3	160°
Filmscreen 150	1.5	120°

## Standard Features

- Tab-Guy Tensioning System
- Roller Tube System
- Seamless Screen Materials
- Motorized Trap Door
- Screen Motor: 120 Volt = 38 rpm, 1 amp  
220 Volt = 32 rpm, 1 amp

## Control Systems : Screen

High Voltage Wall Switch	Included
Low Voltage Control	Optional
Wireless Remote Control	Optional
Infrared Remote Control	Optional
Screen Trigger Interface	Optional
Video Interface Control	Optional

## Mounting Hardware

Ceiling/Soffit Recessed	Included
Wall Mount/Brackets	Optional

For custom sizes and gains, please consult the Screen Assistant software or Stewart Sales desk.

### Video Format (4:3/1.33:1 Aspect Ratio)

Model Number	Image Diagonal	Image Height	Image Width	Case Length	Screen Weight
SEL060V	60" (1524mm)	36 (914)	48 (1219)	74 (1880)	70 lbs. (31.8kg.)
SEL072V	72 (1829)	43 (1092)	57 (1448)	83 (2108)	80 (36.3)
SEL084V	84 (2134)	50 (1270)	67 (1702)	93 (2362)	90 (40.8)
SEL090V	90 (2286)	54 (1372)	72 (1829)	98 (2489)	100 (45)
SEL100V	100 (2540)	60 (1524)	80 (2032)	106 (2692)	110 (49.9)
SEL120V	120 (3048)	72 (1829)	96 (2438)	123 (3124)	120 (54.4)

### HDTV Format (16:9/1.78:1 Aspect Ratio)

Model Number	Image Diagonal	Image Height	Image Width	Case Length	Screen Weight
SEL082H	82 (2083)	40.5 (1029)	72 (1829)	98 (2489)	105 (47.6)
SEL092H	92 (2337)	45 (1143)	80 (2032)	106 (2692)	110 (49.9)
SEL100H	100 (2540)	49 (1245)	87 (2210)	113 (2870)	115 (52.2)
SEL110H	110 (2794)	54 (1372)	96 (2438)	122 (3099)	125 (56.7)

### Widescreen Format (1.85:1 Aspect Ratio)

Model Number	Image Diagonal	Image Height	Image Width	Case Length	Screen Weight
SEL082W	82 (2083)	39 (991)	72 (1829)	98 (2489)	105 (47.6)
SEL091W	91 (2311)	43 (1092)	80 (2032)	106 (2692)	110 (49.9)
SEL100W	100 (2540)	48 (1219)	89 (2261)	115 (2921)	120 (54.4)

<b>Standard Case:</b> Height 8.25" (210mm)      Depth 6" (152)
--

Sizes and specifications are subject to change at anytime.