Panasonic
BUSINESS

## Wireless Presentation System

PressIT

Easy operation
with just a single press
of a button

**More option for
transmitter connectivity**

HDMI/USB   USB-C

Installation flexibility
with efficient design to
fit in various scenes

**Safe and secure
performance**
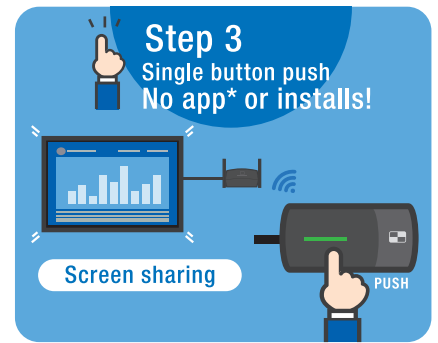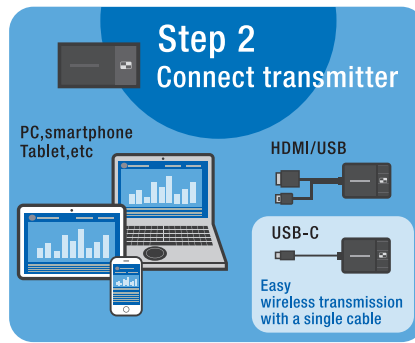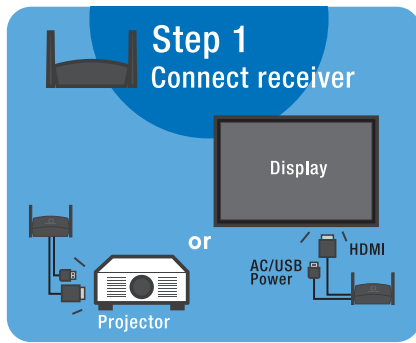without a stress even in wireless

*Heighten our awareness of the value of
face-to-face communication as a precious opportunity.*

PressIT

"PressIT" is a Panasonic's Wireless Presentation System that allows easy screen collaboration with just a single press of a button on a transmitter.

Easy!

Step 1
Connect receiver

Display
or
Projector
AC/USB Power
HDMI

Step 2
Connect transmitter

PC,smartphone Tablet,etc
HDMI/USB
USB-C
Easy wireless transmission with a single cable

Step 3
Single button push
No app* or installs!

Screen sharing
PUSH

*Requires app for Android device

Functions

Connects to mobile devices
*iOS devices with lightning terminal requires Lightning-Digital AV adaptor (Apple genuine) When using Android devices, it requires PressIT app from Google Play.

Presents 4 screens
in Full HD 【supports 4K】

Low latency and **High-definition video**
1920 x 1080 pixels/ max 60p

HDMI CEC
command compatible display / projector

Connects up to
32 transmitters at once

Lock mode
prevents interrupts

Compact and stylish design

Antibacterial
surface treatment for transmitter

Lineup

Basic Set 【TY-WPS1】

Receiver(Box)
Transmitter x 2 (HDMI) 【TY-WP2B1】
Case for Transmitter *1

Transmitter
Transmitter(USB-C) 【TY-WPBC1】

Available later in the year
Receiver(Slot-in)

Specifications

Product		Receiver	Transmitter(HDMI/USB) 【TY-WPB1】	Transmitter(USB-C) 【TY-WPBC1】
Max. resolution/ Framerate		1920x1080/60p (max.) , 3840x2160/30p (max.)	1920 x 1080/60p (max.)	
Number of simultaneous connections		32	-	
Number of sources simultaneous on screen		4	-	
Data Rate	Wired	10/100/1000 (Mbps)	-	
	Wireless	867 Mbps (max.)	433 Mbps (max.)	
Frequency band		5 GHz band , 5,150 MHz - 5,250 MHz , 36 40 44 48 Channel		
Wireless Communication Standard		IEEE802.11/a/n/ac	IEEE802.11/ac	
Security		WPA/WPA2		
Reachable distance		30m (When the line of sight/wave conditions are good)		
Connection terminal		HDMI/USB-A (female) /RJ45(LAN)	HDMI/USB-A (female)/USB-A (male)	USB-A (female)/USB-C (male)
Power		DC 5V/2A	DC 5V/0.9A	
Power consumption		10W	4.5W	
Environment	Operating	Temperature: 0 °C to 35 °C (32 °F to 95 °F) / Humidity: 20% to 80% (No condensation)		
	Storage	Temperature: -20 °C to 60 °C (-4 °F to 140 °F) / Humidity: 20% to 80% (No condensation)		
Dimensions (W x H x D)		120 x 26 x 81 mm (4.71" x 1.03" x 3.19") (Excluding antenna)	51 x 21 x 73 mm (2.0" x 0.8" x 2.86") (Excluding cable)	51 x 26 x 73 mm (2.0" x 1.0" x 2.86") (Excluding cable)
Weight		Approx. 181 g / 0.4 lbs	Approx. 110 g / 0.3 lbs	Approx. 110 g / 0.3 lbs

*1 Dimensions W151.3xH41.6xD198.0mm(6.0"x1.6"x7.8"), Weight Approx. 315g/0.7lbs

Panasonic®

For more information about PressIT, please visit:
PressIT Global Website – **panasonic.net/cns/prodisplays/pressit**
YouTube – **www.youtube.com/user/PanasonicProDisplay**

All information included here is valid as of Feb. 2021.

CT20-U03PF-WPS Printed in Japan.