



Table of Contents

Table of Contents	2	Replace the Lamp.....	41
Usage Notice	3	Appendices.....	41
Safety Information.....	3	Installing and Cleaning the Optional	
Precautions.....	4	Dust Filter	43
Introduction.....	6	Compatibility Modes	44
Package Overview.....	6	VGA Analog	44
Product Overview	7	HDMI Digital.....	45
Main Unit.....	7	List of specifications.....	48
Control Panel.....	8	Wall Mount Installation.....	50
Interface.....	9	Regulation & Safety Notices	51
Remote Control.....	10		
Installation	11		
Connecting the Projector	11		
Connect a Desktop/Laptop Computer	11		
Powering the Projector On / Off.....	13		
Powering On the Projector.....	13		
Powering Off the Projector.....	14		
Warning Indicator.....	14		
Adjusting the Projected Image.....	15		
Adjusting the Projector's Height	15		
Adjusting the Projector's Focus	16		
Adjusting Projection Image Size			
(Diagonal)	17		
User Controls	19		
Control Panel & Remote Control	19		
Control Panel.....	19		
Remote Control.....	20		
On-screen Display Menus	22		
How to operate	22		
Picture.....	23		
Screen	25		
Setting.....	27		
Volume.....	29		
Options	30		
Options Lamp Settings	32		
3D	33		
Interactive	34		
LAN.....	35		

Safety Information

	The lightning flash with arrow head within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.
	The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE. DANGEROUS HIGH VOLTAGES ARE PRESENT INSIDE THE ENCLOSURE. DO NOT OPEN THE CABINET. REFER SERVICING TO QUALIFIED PERSONNEL ONLY.

Class B emissions limits

This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.

Important Safety Instruction

1. Do not block any ventilation openings. To ensure reliable operation of the projector, and to protect from over heating, it is recommended to install the projector in a location that does not block ventilation. As an example, do not place the projector on a crowded coffee table, sofa, bed, etc. Do not put the projector in an enclosure such as a book case or a cabinet that restricts air flow.
2. Do not use the projector near water or moisture. To reduce the risk of fire and/or electric shock, do not expose the projector to rain or moisture.
3. Do not install near heat sources such as radiators, heaters, stoves or any other apparatus, such as amplifiers, that emits heat.
4. Clean only with dry cloth.
5. Only use attachments/accessories specified by the manufacturer.
6. Do not use the unit if it has been physically damaged or abused.
Physical damage/abuse would be (but not limited to):
 - ☐ Unit has been dropped.
 - ☐ Power supply cord or plug has been damaged.
 - ☐ Liquid has been spilled on to the projector.
 - ☐ Projector has been exposed to rain or moisture.
 - ☐ Something has fallen in the projector or something is loose inside.Do not attempt to service the unit yourself. Opening or removing covers may expose you to dangerous voltages or other hazards.
7. Do not let objects or liquids enter the projector. They may touch dangerous voltage points and short out parts that could result in fire or electric shock.
8. The unit should only be repaired by appropriate service personnel.

Precautions



Please follow all warnings, precautions, and maintenance as recommended in this user's manual.

- Warning- Do not look into the projector's lens when the lamp is on. The bright light may hurt and/or damage your eyes.
- Warning- To reduce the risk of fire or electric shock, do not expose this projector to rain or moisture.
- Warning- Please do not open or disassemble the projector as this may cause electric shock.
- Warning- Before replacing the lamp, please have the projector completely cooled down. Operate as described on Pages 48-49.
- Warning- This projector will automatically detect the service life of its lamp. When the projector shows a warning message, the lamp must be replaced "immediately".
- Warning- After replacement of the lamp module, please reset the lamp hour counter (see Page 49).
- Warning- When switching the projector off, please ensure the cooling cycle has been completed before disconnecting power. Allow 90 seconds for the projector to cool down.
- Warning- When service life of the lamp is about to expire, the "Lamp Warning: Exceed Service Life" message will be shown on the screen. Please contact the local dealer or service center to replace the lamp as soon as possible.



❖ When service life of the lamp expires, the lamp module must be replaced. Otherwise, the projector cannot be switched on. To replace the lamp, please follow the steps stated in "Replace the Lamp" on Pages 48-49.

Do:


- ❖ Turn off and unplug the power plug from the AC outlet before cleaning the product.
- ❖ Use a soft, dry cloth with mild detergent to clean the display housing.
- ❖ Disconnect the power plug from AC outlet if the product is not being used for a long period of time.

Do not:


- ❖ Block the slots and openings on the unit provided for ventilation.
- ❖ Use abrasive cleaners, waxes or solvents to clean the unit.
- ❖ Use under the following conditions:
 - In extremely hot, cold, or humid environments.
 - ▶ Ensure that the ambient room temperature is within 5 - 40°C.
 - ▶ Relative Humidity is 5 - 40°C, 80% (Max.), non-condensing.
 - In areas susceptible to excessive dust and dirt.
 - Near any appliance generating a strong magnetic field.
 - In direct sunlight.

Package Overview


Unpack and inspect the box contents to ensure all parts listed below are in the box. If something is missing, please contact your nearest customer service center.



Projector



Power Cord




VGA Cable



2 × AAA Batteries




IR Remote Control



CD-ROM
(User's Manual)

Product Overview


Main Unit

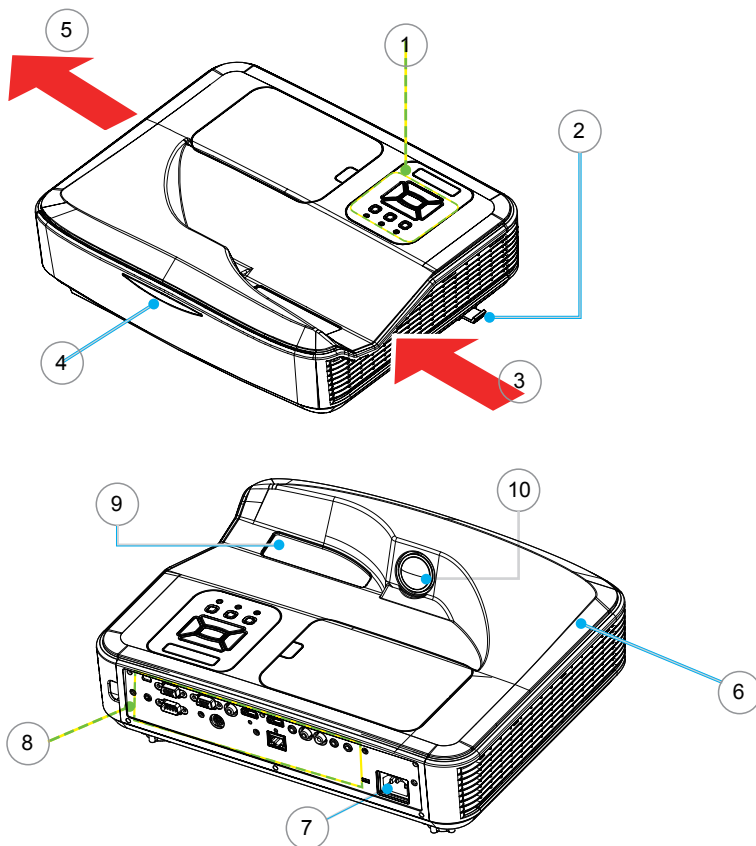

❖ The interface is subject to model's specifications.


- | | |
|-------------------------|-------------------------------|
| 1. Control Panel | 6. Speaker |
| 2. Focus Switch | 7. Power Socket |
| 3. Ventilation (inlet) | 8. Input / Output Connections |
| 4. IR Receiver | 9. Lens |
| 5. Ventilation (outlet) | 10. IR Camera |

Control Panel

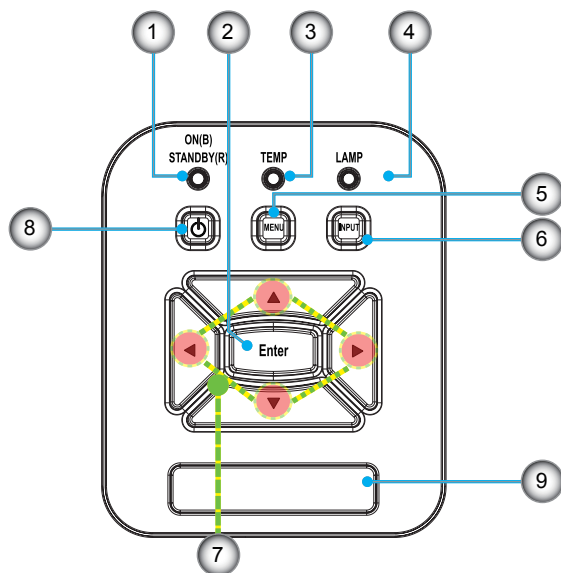

1. Power LED
2. Enter
3. Temp LED
4. Lamp LED
5. Menu
6. Signal source
7. Four Directional Select Keys
8. Power/Standby button
9. IR Receiver

Interface

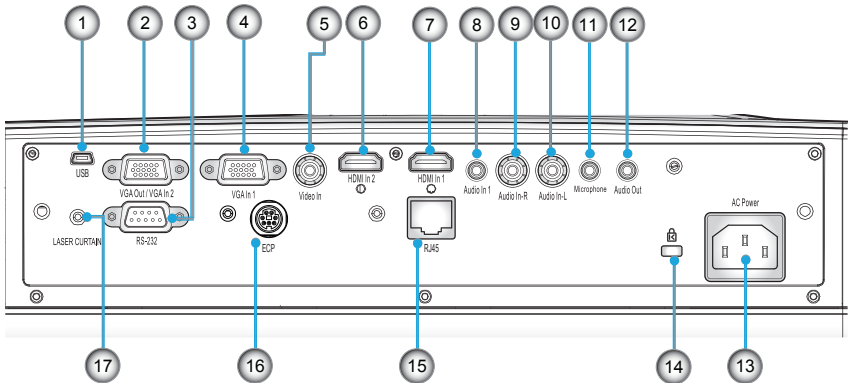

1. USB Connector (For FW upgrade and interactive function)
2. VGA-Out/VGA-In2 Connector
3. RS-232 Connector (9-pin DIN Type)
4. VGA-In1/YPbPr Connector (PC Analog Signal/Component Video Input/HDTV/YPbPr)
5. Composite Video Input Connector
6. HDMI2 Input Connector
7. HDMI1 Input Connector
8. Audio Input Connector (3.5mm mini jack)
9. Composite Audio Input (right) Connector
10. Composite Audio Input (left) Connector
11. Audio Input Connector (microphone connector)
12. Audio Output Connector (3.5mm mini Jack)
13. Power Socket
14. Kensington™ Lock Port
15. RJ45 Connector
16. ECP
17. Laser Curtain (Optional)




Monitor loop through only support in VGA IN1-In/YPbPr.

Remote Control



❖ The specific interfaces are selected in terms of the specifications of types.

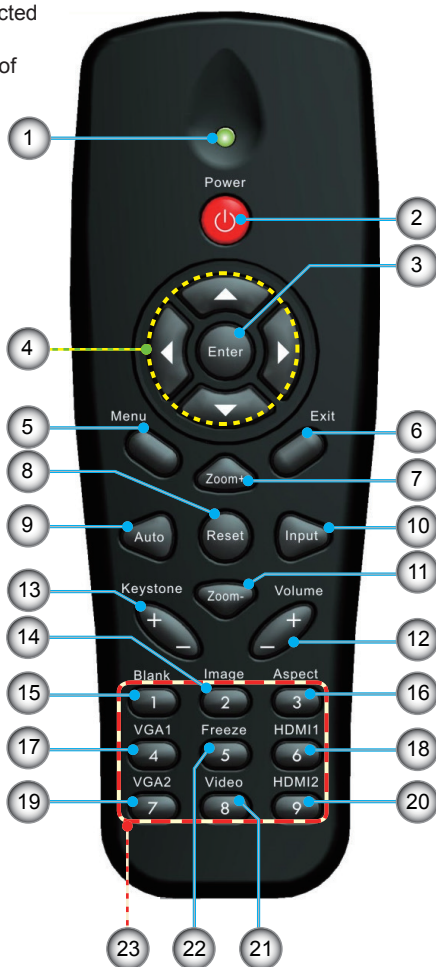

1. LED Indicator
2. Power On/Off
3. Enter
4. Four Directional Key
5. Menu
6. Exit
7. Zoom +
8. Reset
9. Auto
10. Input
11. Zoom -
12. Volume +/-
13. Keystone +/-
14. Image
15. Blank
16. Aspect ratio
17. VGA1
18. HDMI1
19. VGA2
20. HDMI2
21. Video
22. Freeze
23. Numbered keypad
(for password input)

Installation


Connecting the Projector Connect a Desktop/Laptop Computer



❖ Remote keys vary with projector types.



❖ Due to application discrepancies in different countries/regions, certain regions may include different accessories

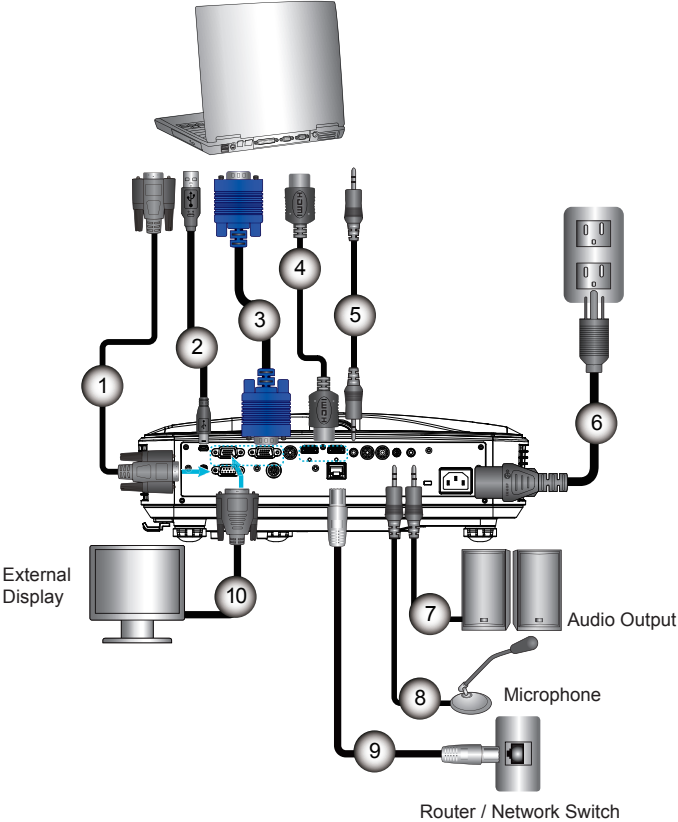

1.....	RS232 Cable
2.....	USB Cable
3.....	VGA Cable
4.....	HDMI Cable
5.....	Audio Input Cable
6.....	Power Cable
7.....	Audio Output Cable
8.....	Audio Input Cable
9.....	RJ45 Cable
10.....	VGA Output Cable


Connect to Video Sources



❖ Remote keys vary with projector types.



❖ Due to application discrepancies in different countries/ regions, certain regions may include different accessories.

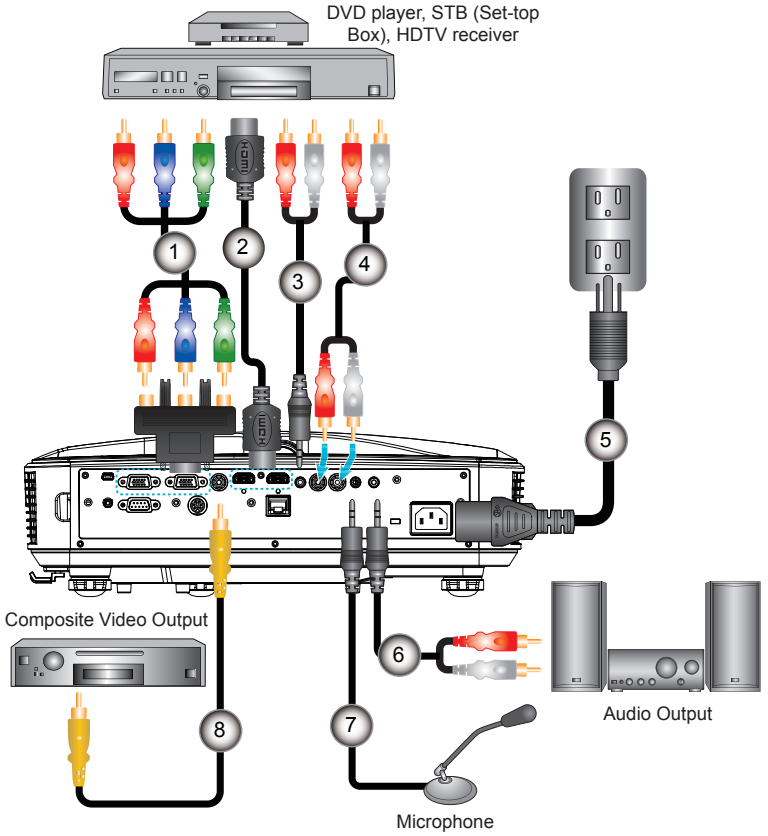

- | | |
|--------|--|
| 1..... | 15-Pin to 3 RCA Component/HDTV Adapter |
| 2..... | HDMI Cable |
| 3..... | Audio Cable/RCA |
| 4..... | Audio Cable |
| 5..... | Power Cable |
| 6..... | Composite Video Cable |
| 7..... | Audio Cable/RCA |
| 8..... | Audio Input Cable |

Powering the Projector On / Off

Powering On the Projector





❖ When the projector is in standby mode (<0.5W), the VGA output and the transmitted audio will be deactivated.

1. Securely connect the power cord and signal cable. When connected, the POWER/STANDBY LED will turn Red.
 2. Turn the lamp on by pressing “” button either on the projector or on the remote. Once pressed, the POWER/STANDBY LED will now turn Blue. ❶
 3. Turn on and connect the source that you want to display on the screen (computer, notebook, video player, etc). The projector will detect the source automatically. If not, press menu button and go to “OPTIONS” to make sure “Auto Source” is enabled.
- ❖ If you connect multiple sources at the same time, press the “INPUT” button on the control panel or direct source keys on the remote control to switch between inputs.




❖ Turn on the projector first and then select the signal sources.

❶ POWER/STANDBY

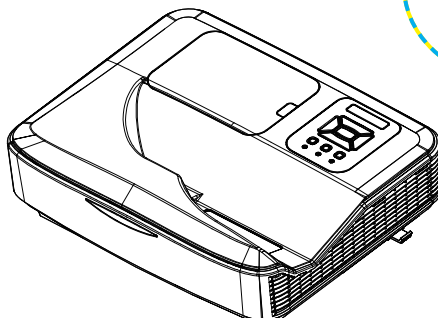

Powering Off the Projector

1. Press the “” button on the remote control or on the control panel to turn the projector off. The following message will be displayed on the screen.



Press the “” button again to confirm; otherwise the message will disappear after 15 seconds. When you press the “” button for the second time, the fan will start cooling the system and the projector will shut down.

2. The cooling fans continue the cooling cycle for about 35 seconds and subsequently the POWER/STANDBY LED will Flash Blue. When the POWER/STANDBY LED lights up solid Red, the projector has entered standby mode. If you wish to turn the projector back on, you must wait until the projector has completed the cooling cycle and has entered standby mode. Once in standby mode, simply press “” button to restart the projector.
3. Disconnect the power cord from the electrical outlet and the projector.
4. Do not turn the projector on immediately following a power off procedure.

Warning Indicator



❖ Contact the nearest service center if the projector displays these symptoms.

When the warning indicators (see below) come on, the projector will automatically shutdown:

- ❖ “LAMP” LED indicator lights up in solid Red.
- ❖ “TEMP” LED flashes Red. This indicates the projector has overheated. Under normal conditions, the projector can be switched back on.


Unplug the power cord from the projector, wait for 30 seconds and try again. If the warning indicator lights up again, please contact your nearest service center for assistance.

Adjusting the Projected Image

Adjusting the Projector's Height

The projector is equipped with Adjustable feet for adjusting the image height.


1. Locate the adjustable feet you wish to modify on the underside of the projector.
2. Rotate the adjustable ring clockwise to raise the projector or counter clockwise to lower it. Repeat with the remaining feet as needed.

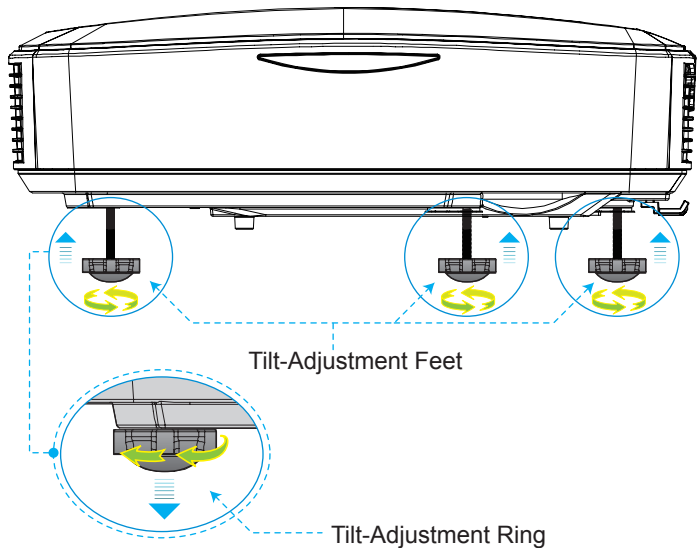

Adjusting the Projector's Focus


To focus the image, slide the focus lever to left/right until the image is clear.

- ▶ WXGA series: The projector will focus at distances from 1.499 to 2.06 ft. (0.457 to 0.628 meter).

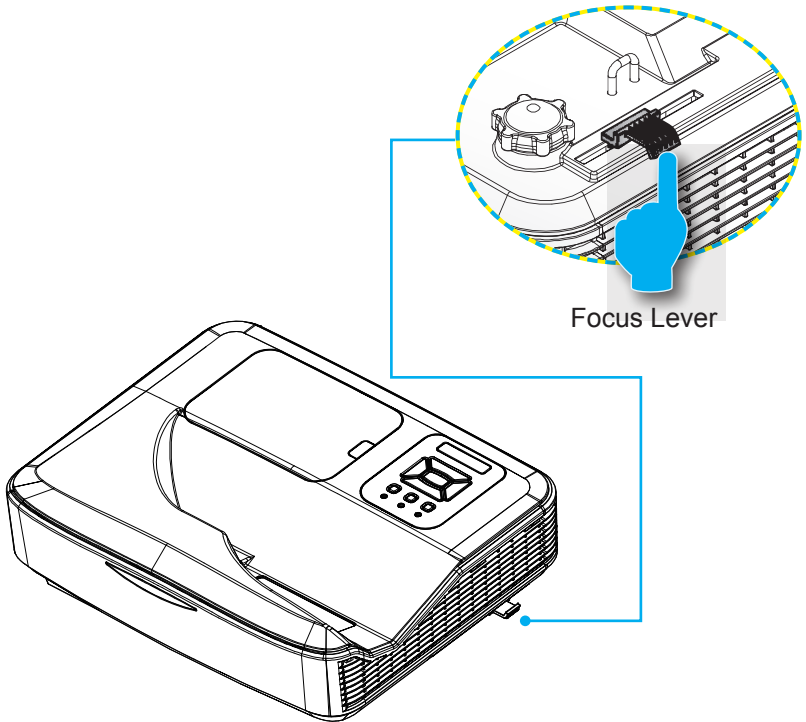

Adjusting Projection Image Size (Diagonal)

- WXGA series: Projection Image Size from 80" to 110" (2.032 to 2.794 meters).

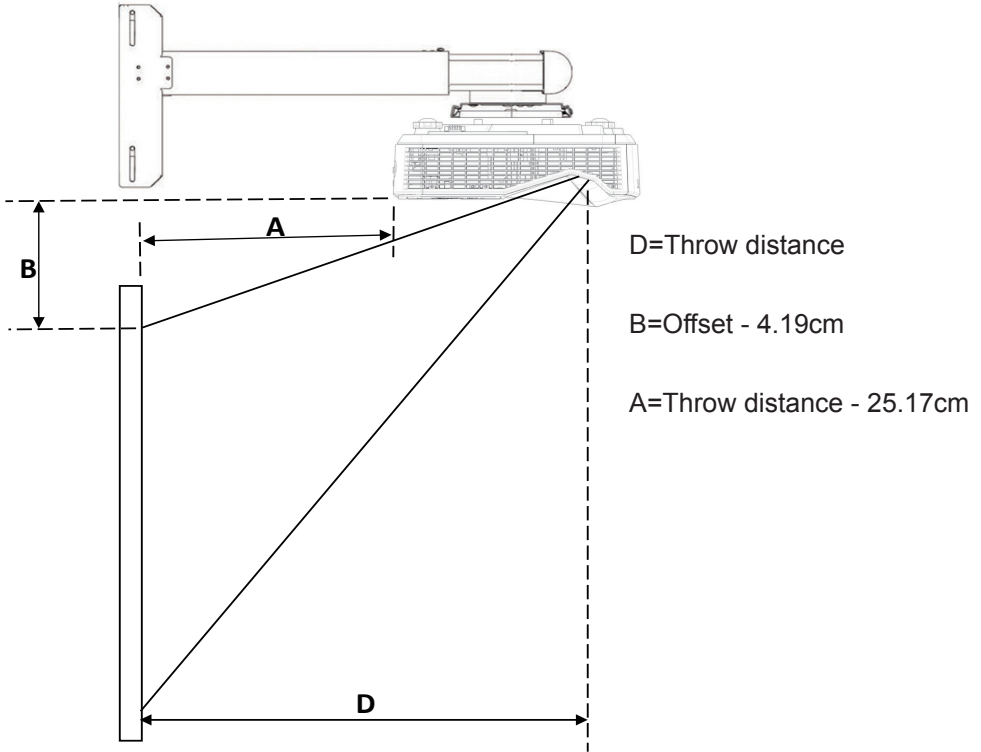


Diagonal of Screen	Screen Size		Projection Distance (D)	Projection Distance (A)	V-Offset (B)
	cm				
	W (Width)	H (Height)	cm	cm	cm
80	172.3	107.7	45.7	20.5	12
81	174.5	109	46.2	21.1	12.2
82	176.6	110.4	46.8	21.6	12.4
83	178.8	111.7	47.4	22.2	12.6
84	180.9	113.1	47.9	22.8	12.8
85	183.1	114.4	48.5	23.3	13
86	185.2	115.8	49.1	23.9	13.2

Diagonal of Screen	Screen Size		Projection Distance (D)	Projection Distance (A)	V-Offset (B)
	cm				
	W (Width)	H (Height)	cm	cm	cm
87	187.4	117.1	49.7	24.5	13.4
88	189.5	118.5	50.2	25.1	13.6
89	191.7	119.8	50.8	25.6	13.8
90	193.9	121.2	51.4	26.2	14
91	196	122.5	51.9	26.8	14.2
92	198.2	123.9	52.5	27.3	14.4
93	200.3	125.2	53.1	27.9	14.6
94	202.5	126.5	53.7	28.5	14.8
95	204.6	127.9	54.2	29.1	15
96	206.8	129.2	54.8	29.6	15.2
97	208.9	130.6	55.4	30.2	15.4
98	211.1	131.9	55.9	30.8	15.6
99	213.2	133.3	56.5	31.3	15.8
100	215.4	134.6	57.1	31.9	16
101	217.5	136	57.6	32.5	16.2
102	219.7	137.3	58.2	33.1	16.4
103	221.9	138.7	58.8	33.7	16.6
104	224	140	59.4	34.3	16.8
105	226.2	141.4	59.9	34.9	17
106	228.3	142.7	60.5	35.5	17.2
107	230.5	144	61.1	36.1	17.4
108	232.6	145.4	61.6	36.7	17.6
109	234.8	146.7	62.2	37.3	17.8
110	236.9	148.1	62.8	37.9	18

Control Panel & Remote Control

Control Panel



Using the Control Panel

POWER	 Press "Power" to turn ON/OFF the projector.
Enter	Press "Enter" to confirm your selected item.
INPUT	Press "INPUT" to select signal source.
MENU	Press "MENU" to launch the on-screen display (OSD) menu. To exit OSD, press "MENU" again.
Four Directional Select Keys	Press     to select item.
LAMP LED	This indicates the lamp status of the projector.
TEMP LED	This indicates the lamp status of the projector.
ON/STANDBY LED	This indicates the status of the projector.

Remote Control



Using the Remote Control

LED	LED Indicator.
Power 	Press Power to turn ON/OFF the projector.
Exit	Press “Exit” to close the OSD menu.
Zoom +	Zoom in the display of the projector
Reset	Reset the adjustments to default setting.
Zoom -	Zoom out the display of the projector.
Enter	Confirm your selected item.
Input	Press “Source” to select an input signal.
Auto	Automatically synchronizes the projector to the input source.
Four Directional Select Keys	Use ▲ ▼ ◀ ▶ to select items or make adjustments to your selection.
Keystone +/-	Adjust image keystone by tilting the projector.
Volume +/-	Adjust the Volume.
Aspect	Use this function to choose your desired aspect ratio.
Menu	Press “Menu” to launch the on-screen display (OSD) menu. To exit OSD, press “Menu” again.
VGA1	Press “VGA1” to choose VGA IN 1 connector.



Using the Remote Control


Blank screen	Momentarily turns off/on the audio and video.
HDMI1	Press “HDMI1” to choose HDMI IN 1 connector.
HDMI2	Press “HDMI2” to choose HDMI IN 2 connector.
VGA2	Press “VGA2” to choose VGA IN 2 connector.
Video	Press “Video” to choose Composite video source.
Freeze screen	Pause the screen image. Press again to resume the screen image.
Image	Select the color mode from Bright, PC, Movie, Game and User.

On-screen Display Menu


The Projector has multilingual On-screen Display menus that allow you to make image adjustments and change a variety of settings.

How to operate

1. To open the OSD menu, press “Menu” on the Remote Control or Projector Keypad.
2. When OSD is displayed, use the ▲ ▼ keys to select any item in the main menu. While making a selection on a particular page, press the ► or “Enter” key to enter sub menu.
3. Use the ▲ ▼ keys to select the desired item and adjust the settings using the ◀▶ key.
4. Select the next item to be adjusted in the sub menu and adjust as described above.
5. Press “Enter” to confirm, and the screen will return to the main menu.
6. To exit, press “Menu” again. The OSD menu will close and the projector will automatically save the new settings.

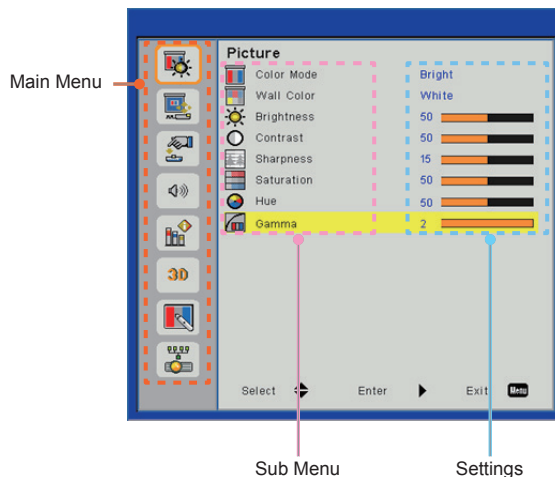

Picture

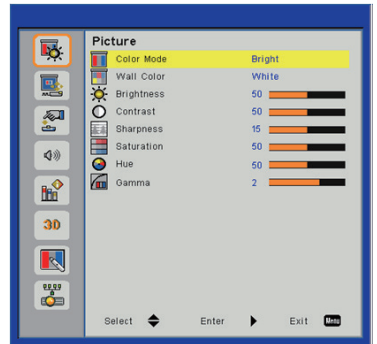

Color Mode

There are many factory presets optimized for various types of images. Use the ◀ or ▶ button to select the item.

- ▶ Bright: For brightness optimization.
- ▶ PC: For meeting presentation.
- ▶ Movie: For playing video content.
- ▶ Game: For game content.
- ▶ User: Memorize user's settings.

Wall Color

Use this function to obtain an optimized screen image according to the wall color. You can select from "White", "Light Yellow," "Light Blue," "Pink," and "Dark Green".

Brightness

Adjust the brightness of the image.

- ▶ Press the ◀ button to darken image.
- ▶ Press the ▶ button to darken image.

Contrast

The Contrast controls the difference between the lightest and darkest parts of the picture. Adjusting the contrast changes the amount of black and white in the image.

- ▶ Press the ◀ button to decrease the contrast.
- ▶ Press the ▶ button to increase the contrast.



- ❖ “Sharpness”, “Saturation” and “Hue” functions are only supported under video mode.

Sharpness

Adjust the sharpness of the image.

- ▶ Press the ◀ button to decrease the sharpness.
- ▶ Press the ▶ button to increase the sharpness.

Saturation

Adjust a video image from black and white to fully saturated color.

- ▶ Press the ◀ button to decrease the amount of saturation in the image.
- ▶ Press the ▶ button to increase the amount of saturation in the image.

Hue

Adjust the color balance of red and green.

- ▶ Press the ◀ button to increase the amount of green in the image.
- ▶ Press the ▶ button to increase the amount of red in the image.

Gamma

This allows you to adjust the gamma value to obtain the better image contrast for the input.

Screen



Aspect Ratio

- ▶ Auto: Keep the image with original width-height ratio and maximize the image to fit native horizontal or vertical pixels.
- ▶ 4:3: The image will be scaled to fit the screen and displayed using a 4:3 ratio.
- ▶ 16:9: The image will be scaled to fit the width of the screen and the height adjusted to display the image using a 16:9 ratio.
- ▶ 16:10: The image will be scaled to fit the width of the screen and the height adjusted to display the image using a 16:10 ratio. (only for SSI 1080p).
- ▶ UWHD: The image will be scaled to fit the width of the screen and the height adjusted to display the image using a 16:6 ratio (only for Ultrawide).



- ❖ “H. Position” and “V. Position” ranges will depend on input source.

Phase

Synchronize the signal timing of the display with the graphic card. If the image appears to be unstable or it flickers, use this function to correct it.

Clock

Adjust to achieve an optimal image when there is a vertical flicker in the image.

H. Position

- ▶ Press the ◀ button to move the image left.
- ▶ Press the ▶ button to move the image right.

V. Position

- ▶ Press the ◀ button to move the image down.
- ▶ Press the ▶ button to move the image up.

Digital Zoom

- ▶ Press the ◀ button to reduce the size of an image.
- ▶ Press the ▶ button to magnify an image on the projection screen.


V Keystone

Press the ◀ or ▶ button to adjust image distortion vertically. If the image looks trapezoidal, this option can help make the image rectangular.

Ceiling Mount

- ▶ Front: The image is projected straight on the screen.
- ▶ Front Ceiling: This is the default selection. When selected, the image will turn upside down.
- ▶ Rear: When selected, the image will appear reversed.
- ▶ Rear Ceiling: When selected, the image will appear reversed in upside down position.

Setting

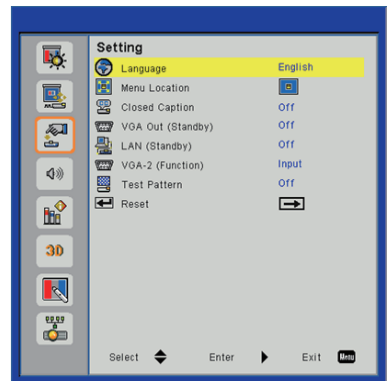

Language

Choose the multilingual OSD menu. Press the ◀ or ▶ button into the sub menu and then use the ▲ or ▼ button to select your preferred language. Press ▶ on the remote control to finalize the selection.



Menu Location

Choose the menu location on the display screen.

Closed Caption

Use this function to enable closed caption menu. Select an appropriate closed captions option: Off, CC1, CC2, CC3, and CC4.

VGA Output (Standby)

Choose "On" to enable VGA OUT connection.

LAN (Standby)

Choose "On" to enable LAN connection. Choose "Off" to disable LAN connection.

VGA B (Function)

- ▶ Input: Choose "Input" to let the VGA port work as a VGA input function.
- ▶ Output: Choose "Output" to enable the VGA Out function once the projector is powered on.


Test Pattern

Display a test pattern.

Reset

Choose "Yes" to return the parameters on all menus to the factory default settings.

Volume

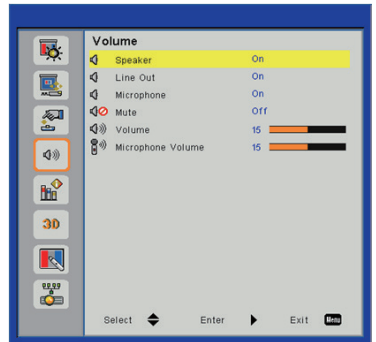

Speaker

- ▶ Choose "On" to enable the speaker.
- ▶ Choose "Off" to disable the speaker.

Line Out

- ▶ Choose "On" to enable the line out function.
- ▶ Choose "Off" to disable the line out function.

Microphone

- ▶ Choose "On" to enable the microphone.
- ▶ Choose "Off" to disable the microphone.

Mute

- ▶ Choose "On" to turn mute on.
- ▶ Choose "Off" to turn mute off.


Volume

- ▶ Press the ◀ button to decrease the volume.
- ▶ Press the ▶ button to increase the volume.

Microphone Volume

- ▶ Press the ◀ button to decrease the microphone volume.
- ▶ Press the ▶ button to increase the microphone volume.

Options

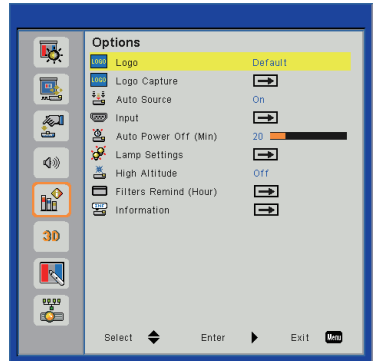

Logo

Use this function to set the desired startup screen. If changes are made, they will take effect the next time the projector is powered on.


- ▶ Default: The default startup screen.
- ▶ User: Use stored picture from “Logo Capture” function.



- ❖ For successful logo capture, please ensure that the on-screen image does not exceed the projector's native resolution. (WXGA:1280x800).
- ❖ “Logo Capture” is not available when 3D is enabled.
- ❖ Before activating this function, it is recommended that “Aspect Ratio” is set to the “Auto.”

Logo Capture

Press ► button to capture an image of the picture currently displayed on screen.




Auto Source

- ▶ On: The projector will search for other signals if the current input signal is lost.
- ▶ Off: The projector will only search current input connection.

Input

Press ► button to enable/disable input sources. The projector will not search for inputs that are not selected.

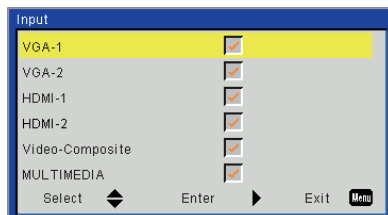



- ❖ “Dynamic Black” is available when “Color Mode” is set to “Movie”.
- ❖ “Dynamic Black” is not available when “3D” or “Interactive” is enabled.
- ❖ When “Dynamic Black” is available, “Lamp Power Mode” selection is not available.

Auto Power Off (Min)

Sets the countdown timer interval. The countdown timer will start when there is no signal being sent to the projector. The projector will automatically power off when the countdown has finished (in minutes).

Lamp Settings

Refer to page 32.

High Altitude

- ▶ On: The built-in fans run at high speed. Select this option when using the projector at altitudes above 2500 feet/762 meters or higher.
- ▶ Off: The built-in fans automatically run at a variable speed according to the internal temperature.


Filters Remind (Hour)

- ▶ Filters Remind (Hour): Set the filter reminder time.
- ▶ Cleaning Up Remind: Select “Yes” to reset the dust filter hour counter after replacing or cleaning the dust filter.

Information

Display the projector information for model name, SNID, source, resolution, software version, and aspect ratio on the screen.

Options | Lamp Settings

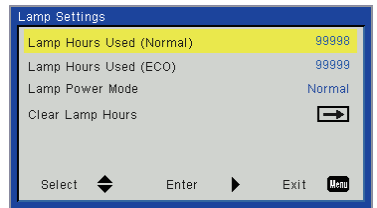

Lamp Hours Used (Normal)

Display the projection time of normal mode.

Lamp Hours Used (ECO)

Display the projection time of ECO mode.


Lamp Power Mode

- ▶ Normal: Normal mode.
- ▶ ECO: Use this function to dim the projector lamp which will lower power consumption and extend the lamp life.

Clear Lamp Hours

Choose “Yes” to reset the lamp hour counter.

3D

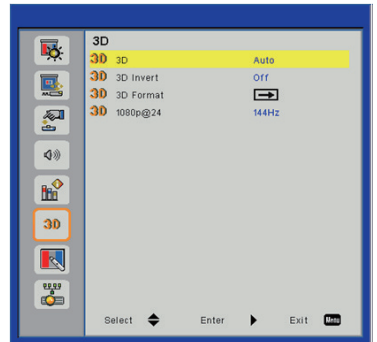

- ❖ “Frame Sequential” is supported by the DLP Link 3D input signals from VGA /HDMI connector.
- ❖ “Frame Sequential” / “Field Sequential” are supported by the HQFS 3D input signals from Composite/ S-Video connector.
- ❖ “Frame Packing” / “Side-by-Side(Half)” / “Top and Bottom” are supported from HDMI 1.4a 3D input signals.

3D

- ▶ Auto: When an HDMI 1.4a 3D timing identification signal is detected, the 3D image is selected automatically.
- ▶ Choose “On” to enable 3D function.
- ▶ Choose “Off” to disable 3D function.

3D Invert

If you see a discrete or overlapping image while wearing DLP 3D glasses, you may need to execute “Invert” to get best match of left/ right image sequence to get the correct image.


3D Format

Use this feature to select the 3D format. Options are: “Frame Packing,” “Side-by-Side (Half),” “Top and Bottom,” “Frame Sequential,” and “Field Sequential.”

1080p@24

Use this feature to select 96 or 144Hz refresh rate as using 3D glasses in the 1080p @ 24 frame packing.

Interactive

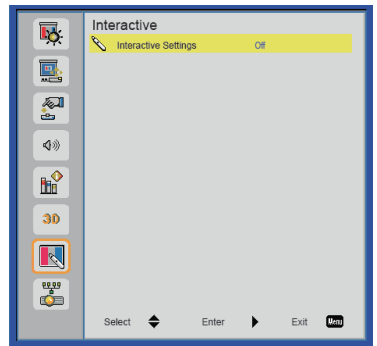


- ❖ The Interactive function is available when displaying graphic source from HDMI/VGA input. Other sources are not supported.
- ❖ If “3D” or “Dynamic Black” function is enabled, “Interactive” feature is disabled.
- ❖ Interaction function: Please specify that the Interaction function is only for USTi model. The Interaction function is not available in the UST model.

Interactive Settings

- ▶ Choose “On” to enable Interactive function.
- ▶ Choose “Off” to disable Interactive function.

You need to unplug the Mini USB cable that connects NB/desktop with the projector before using the Interactive function. After you complete the Interactive Settings in OSD, use Mini USB cable to connect NB/desktop to the projector.

LAN

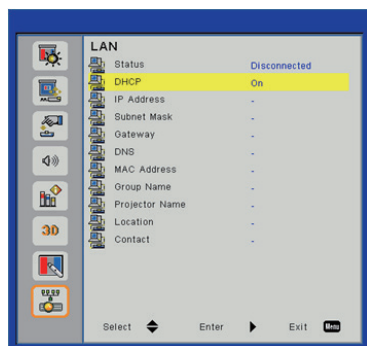

Status

Display the network connection status.

DHCP

Configure the DHCP settings.

- ▶ On: Choose “On” to let the projector obtain an IP address automatically from your network.
- ▶ Off: Choose “Off” to assign IP, Subnet Mask, Gateway, and DNS configuration manually.

IP Address

Display an IP address.

Subnet Mask

Display the subnet mask number.

Gateway

Display the default gateway of the network connected to the projector.

DNS

Display the DNS number.

MAC Address

Display the MAC address.

Group Name

Display the group name.

Projector Name

Display the projector name.

Location


Display the projector location.

Contact

Display the contact information.

How to use web browser to control your projector

1. Turn on DHCP to allow a DHCP server to automatically assign an IP, or manually enter the required network information.

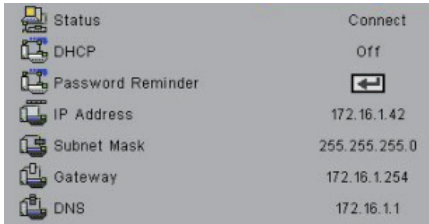

2. Then choose apply and press **OK** button to complete the configuration process.
3. Open your web browser and type in IP Address from the OSD LAN screen then the web page will display as below:



- ❖ When you use the projector IP address, you can't link to your service server.

4. Based on network web-page for the input-string in [tools] tab, the limitation for Input-Length is in the below list ("space" and the other punctuation keys included):

Category	Item	Input-Length (characters)
Crestron Control	IP Address	15
	IP ID	2
	Port	5
Projector	Projector Name	10
	Location	9
	Assigned To	9
Network Configuration	DHCP (Enabled)	(N/A)
	IP Address	15
	Subnet Mask	15
	Default Gateway	15
	DNS Server	15
User Password	Enabled	(N/A)
	New Password	15
	Confirm	15
Admin Password	Enabled	(N/A)
	New Password	15
	Confirm	15



When making a direct connection from your computer to the projector


Step 1: Find an IP Address (192.168.0.100) from LAN function of projector.

IP Address	192	168	000	100
------------	-----	-----	-----	-----

Step 2: Select apply and press “Enter” button to submit function or press “menu” key to exit.


Step 3: To open Network Connections, click **Start**, click **Control Panel**, click **Network and Internet Connections**, and then click **Network Connections**. Click the connection you want to configure, and then, under **Network Tasks** , click **Change settings of this connection**.

Step 4: On the **General** tab, under **This connection uses the following items**, click **Internet Protocol (TCP/IP)**, and then click “Properties.”




Step 5: Click **Use the following IP address**, and type in as below:


- 1) IP address: 192.168.0.100
- 2) Subnet mask: 255.255.255.0
- 3) Default gateway: 192.168.0.254



Step 6: To open Internet Options, click IE web browser, click Internet Options, click the **Connections** tab and click “LAN Settings...”



Step 7: The **Local Area Network (LAN) Setting** dialog box appears. In the **Proxy Server** area, cancel the **Use a proxy server for your LAN** check box, then click “OK” button twice.




Step 8: Open your IE and type in the IP address of 192.168.0.100 in the URL then press “Enter” key.

Crestron RoomView Control Tool

Crestron RoomView™ provides a central monitoring station for 250 + control systems on a single Ethernet network (more are possible- the number depends on the combination of IP ID and IP address). Crestron RoomView monitors each projector, including projector's online status, system power, lamp life, network setting and hardware faults, plus any custom attribute as defined by the Administrator. The Administrator can add, delete, or edit room information, contact information and events, which are logged automatically by the software for all users. (Operation UI as following image)

1. Main Screen

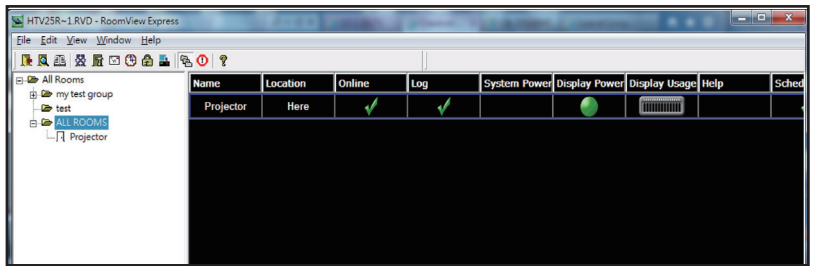

2. Edit Room

General | Groups | Attributes | Assets | Contacts | Events

Room Information

Name: crestron room Phone:

Location: e-Control Link: Browse...

IP Address: 192.168.0.101 Video Link:

IPID/IP Port: 03 41734

☐ DHCP Enabled

☐ External Gateway: 0.0.0.0

☐ SSL

Username: Password:

Comment:

Save Room Save As Help

OK Cancel Apply

3. Edit Attribute

The screenshot shows the 'Edit Attribute: Display Power' dialog box. It has tabs for 'General', 'Alert', 'Groups', and 'Contacts'. The 'General' tab is active. Under 'Attribute Properties', there are fields for 'Signal Name' (set to 'Display Power'), 'Device' (set to 'None'), 'Signal Type' (set to 'Digital'), and 'Join Number' (set to '5'). There is also a 'Default Max. Value' field set to '1'. To the right, there is a 'Graphic' section with 'Off' and 'On' buttons, each with a corresponding colored circle (red for Off, green for On). Under 'Options', there are four checkboxes: 'Apply attribute to all rooms' (checked), 'Apply attribute to all contacts' (unchecked), 'Record attribute changes to log' (checked), and 'Display on main view' (checked). There is also a 'Show on context menu' checkbox with an 'Advanced...' button next to it. At the bottom are 'OK', 'Cancel', and 'Apply' buttons.

4. Edit Event


The screenshot shows the 'Edit Event: Display Off Warning' dialog box. It has tabs for 'General' and 'Rooms'. The 'General' tab is active. Under 'Event Properties', there are fields for 'Name' (set to 'Display Off Warning'), 'Type' (set to 'Digital'), and 'Join' (set to '5'). There are also checkboxes for 'Enable this event' and 'Repeat event'. Under 'Schedule', there are fields for 'Start Date' (set to '2010/ 9/ 2'), 'End Date' (set to '2010/ 9/ 2'), and 'Time' (set to '0:00:00'). There are also checkboxes for 'Weekdays' (checked), 'Weekends' (unchecked), and specific days of the week: 'Monday' (checked), 'Tuesday' (checked), 'Wednesday' (checked), 'Thursday' (checked), 'Friday' (checked), 'Saturday' (unchecked), and 'Sunday' (unchecked). At the bottom are 'OK', 'Cancel', and 'Apply' buttons.

For further information, please visit:

<http://www.crestron.com> & www.crestron.com/getroomview.

Replace the Lamp

This projector will automatically detect the service life of its lamp. When service life of the lamp is about to expire, a warning message will be displayed.



When you see this message, please contact the local dealer or service center to replace the lamp as soon as possible. Please be sure that the projector has been cooled down for at least 30 minutes before replacement of the lamp.




 Warning: If the projector is installed on the ceiling, please handle carefully when you open the lamp cover. If the projector is installed on the ceiling, we suggest that you wear safety glasses when replacing the lamp. “ys handle carefully to prevent any loose component from falling off the projector.”

 Warning: The lamp Component may be hot! Replace the lamp after it is cooled down!

 Warning: To reduce the risk of personal injury, please prevent the lamp module from falling down and avoid touching the lamp. If the lamp falls down, it may be broken up, which may cause injury.

Appendices

- 

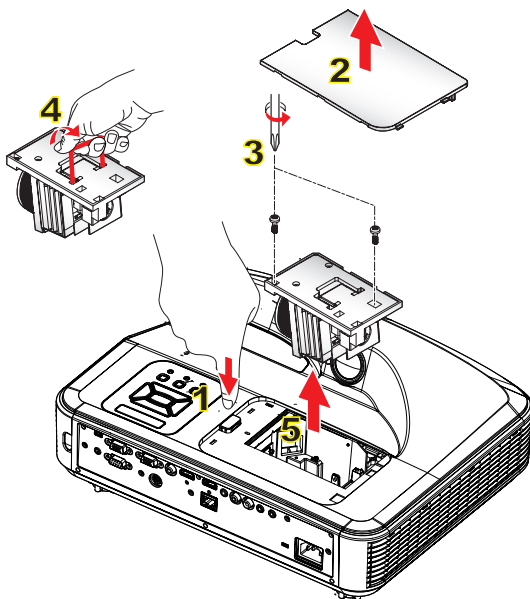

○ **Cleaning procedure for air filter:** ○

1. Press “” button to power the projector off.
 2. Cool down the projector for at least 30 minutes.
 3. Pull off the power cable.
 4. Press the release button and pull up the lamp cover of the main components. **1**
 5. Lift up and remove the lamp cover. **2**
 6. Remove the 2 screws on the lamp module. **3**
 7. Pull up the Lamp Handle **4** and pull the lamp module out carefully and slowly. **5**
- Follow the aforesaid steps in the reverse order to install the lamp module.
8. After the lamp module is replaced, switch on the projector and reset the lamp hour counter.

To reset the lamp, please finish the following steps:

- (i) Press **▼→▲→▲→◀→▲** to open the **“Service”** menu.
- (ii) Select **“Reset Lamp Hours”**.
- (iii) Press **“OK”** to confirm the selection.

Installing and Cleaning the Optional Dust Filter


We recommend you clean the dust filter every 500 hours of operation, or more often if you are using the projector in a dusty environment.

When the warning message appears on the screen, do the following to clean the air filter:

The usage time of the dust filter is reached.
Please clean the dust filters for better performance.



- ❖ The optional dust filter should be used in dusty environments.
- ❖ If the dust filter is installed, a proper maintenance will prevent overheating and projector malfunction.

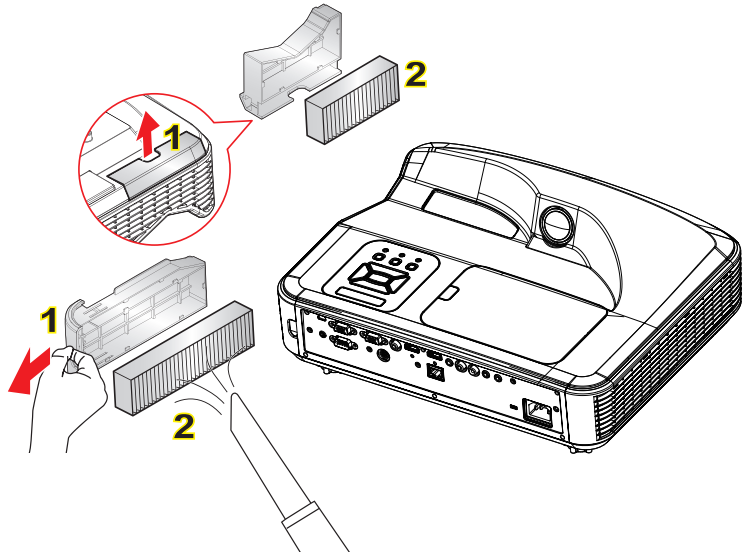

○ Air Filter Cleaning Procedure: ○

1. Turn off the projector.
2. Disconnect the power cord.
3. Pull out the lock, and remove the Component of the dust filter, as shown in the illustration. **1**
4. Carefully remove the air filter. Then using vacuum to clean or change the filter directly. Follow the aforesaid steps in the reverse order to install the filter. **2**
To install the filter, please return to the previous step.
5. Turn on the projector and reset the filter usage counter after the dust filter is replaced.

Compatibility Modes

► VGA Analog

a. PC Signal			
Modes	Resolution	V.Frequency [Hz]	H.Frequency [KHz]
VGA	640x480	60	31.5
	640x480	67	35
	640x480	72	37.9
	640x480	75	37.5
	640x480	85	43.3
IBM	720x400	70	31.5
SVGA	800x600	56	35.1
	800x600	60	37.9
	800x600	72	48.1
	800x600	75	46.9
	800x600	85	53.7
	800x600	120	77.4
Apple, Mac II	832x624	75	49.1
XGA	1024x768	60	48.4
	1024x768	70	56.5
	1024x768	75	60
	1024x768	85	68.7
	1024x768	120	99
Apple, Mac II	1152x870	75	68.7
SXGA	1280x1024	60	64
	1280x1024	72	77
	1280x1024	75	80
QuadVGA	1280x960	60	60
	1280x960	75	75.2
SXGA+	1400x1050	60	65.3
UXGA	1600x1200	60	75

b. Extended Wide timing			
Modes	Resolution	V.Frequency [Hz]	H.Frequency [KHz]
WXGA	1280x720	60	44.8
	1280x720	120	92.9
	1280x800	60	49.6
	1366x768	60	47.7
	1440x900	60	59.9
WSXGA+	1680x1050	60	65.3
c. Component Signal			
Modes	Resolution	V.Frequency [Hz]	H.Frequency [KHz]
480i	720x480 (1440x480)	59.94(29.97)	15.7
576i	720x576 (1440x576)	50(25)	15.6
480p	720x480	59.94	31.5
576p	720x576	50	31.3
720p	1280x720	60	45
720p	1280x720	50	37.5
1080i	1920x1080	60(30)	33.8
1080i	1920x1080	50(25)	28.1
1080p	1920x1080	23.98/24	27
1080p	1920x1080	60	67.5
1080p	1920x1080	50	56.3

► HDMI Digital

a. PC Signal			
Modes	Resolution	V.Frequency [Hz]	H.Frequency [KHz]
VGA	640x480	60	31.5
	640x480	67	35
	640x480	72	37.9
	640x480	75	37.5
	640x480	85	43.3

IBM	720x400	70	31.5
SVGA	800x600	56	35.1
	800x600	60	37.9
	800x600	72	48.1
	800x600	75	46.9
	800x600	85	53.7
	800x600	120	77.4
Apple, Mac II	832x624	75	49.1
XGA	1024x768	60	48.4
	1024x768	70	56.5
	1024x768	75	60
	1024x768	85	68.7
	1024x768	120	99
Apple, Mac II	1152x870	75	68.7
SXGA	1280x1024	60	64
	1280x1024	72	77
	1280x1024	75	80
QuadVGA	1280x960	60	60
	1280x960	75	75.2
SXGA+	1400x1050	60	65.3
UXGA	1600x1200	60	75

b. Extended Wide timing			
Modes	Resolution	V.Frequency [Hz]	H.Frequency [KHz]
WXGA	1280x720	60	44.8
	1280x720	120	92.9
	1280x800	60	49.6
	1366x768	60	47.7
	1440x900	60	59.9
WSXGA+	1680x1050	60	65.3
c. HDMI - Video Signal			
Modes	Resolution	V.Frequency [Hz]	H.Frequency [KHz]
640x480p	640x480	59.94/60	31.5
480i	720x480 (1440x480)	59.94(29.97)	15.7
576i	720x576 (1440x576)	50(25)	15.6
480p	720x480	59.94	31.5
576p	720x576	50	31.3
720p	1280x720	60	45
720p	1280x720	50	37.5
1080i	1920x1080	60(30)	33.8
1080i	1920x1080	50(25)	28.1
1080p	1920x1080	23.98/24	27
1080p	1920x1080	60	67.5
1080p	1920x1080	50	56.3
d. HDMI 1.4a mandatory 3D timing- Video Signal			
Modes	Resolution	V.Frequency [Hz]	H.Frequency [KHz]
Frame Packing	720p	50	
	720p	59.94/60	
	1080p	23.98/24	
Side-by-Side	1080i	50	
	1080i	59.94/60	
Top-and-Bottom	720p	50	
	720p	59.94/60	
	1080p	23.98/24	

List of specifications

Item	Specification
Resolution	WXGA
Graphics Card DMD Dimensions	0.65"
Projector Technology	DLP
Projector Lens	Fixed Lens, f/2.4
Lighting Technology	Philips Smart Energy-Saving Lamp
Brightness	4000 Lumens
Contrast	10000:1 (High Contrast Ratio mode)
Supported resolution	Up to 1080p @ 60Hz (CEA 861)
Throw Ratio	0.27
Weight (KG)	4.5KG
Dimensions	383mm(W) x 310mm(D) x 103mm(H) (excluding foot)
Light Power	260W
Light Life	3000 Hours / 4000 Hours (ECO Mode)
Total Power (W)	320W
Standby Power (W)	<0.5W
Audio Output	16W
Operating Noise	34dB / 29dB (ECO Mode)
Input Terminals	
VGA and Y/Pb/Pr	X1: D-sub female 15 pin terminal (blue)
HDMI	X2: Standard HDMI terminal 1)Support HDMI input with HDMI 1.4a compliant. 2)Supports High bandwidth Digital Content Protection – HDCP Standard 1.3 of December 2006
VGA Audio	X1: Stereo mini jack
MIC	X1: Stereo mini jack
Composite Video	X1: RCA (yellow)
Composite Audio	X2: RCA for both left and right
Output Terminals	
Audio	X1: Stereo mini jack(green)
VGA	X1: D-sub female 15 pin terminal (black) (Support VGA in function)

Other Terminals	
Mini USB-B	Mini USB type B (for FW download)
RS232	DB9 Male terminal
RJ45	RJ45 for LAN control

Wall Mount Installation

If you wish to use a third party ceiling mount kit, please ensure the screws used to attach a mount to the projector meet the following specifications:

- Screw type: M4*4
- Minimum screw length: 10mm




❖ Please note that damage resulting from incorrect installation will void the warranty.



⚠ Warning:

1. If you buy a ceiling mount from another company, please be sure to use the correct screw size. Screw size will vary depending on the thickness of the mounting plate.
2. Be sure to keep at least 10 cm gap between the ceiling and the bottom of the projector.
3. Avoid installing the projector near a heat source.

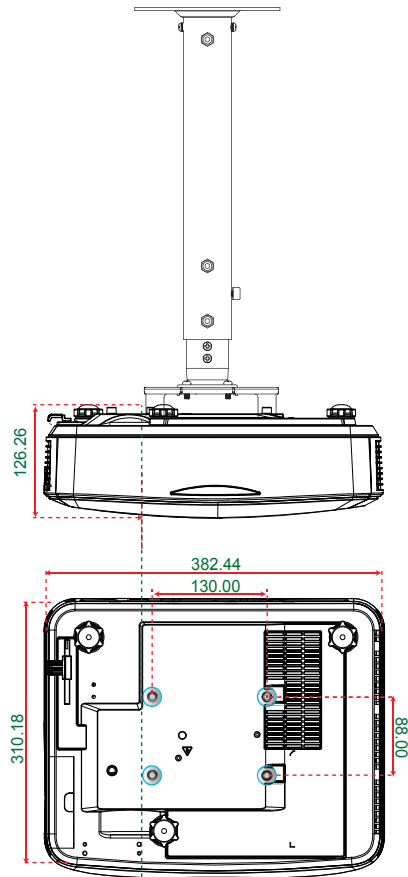

Unit: mm

Regulation & Safety Notices

This appendix lists the general notices of your projector.

FCC notice

This device has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

Notice: Shielded cables

All connections to other computing devices must be made using shielded cables to maintain compliance with FCC regulations.

Caution

Changes or modifications not expressly approved by the manufacturer could void the user's authority, which is granted by the Federal Communications Commission, to operate this projector.

Operation conditions

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference and
2. This device must accept any interference received, including interference that may cause undesired operation.

Notice: Canadian users

This Class B digital apparatus complies with Canadian ICES-003.

Remarque à l'intention des utilisateurs canadiens

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Declaration of Conformity for EU countries

- EMC Directive 2004/108/EC (including amendments)
- Low Voltage Directive 2006/95/EC
- R & TTE Directive 1999/5/EC (if product has RF function)

Disposal instructions



Do not throw this electronic device into the trash when discarding. To minimize pollution and ensure utmost protection of the global environment, please recycle it.

Safety notice



IEC 60825-1:2014.
Complies with IEC 62471 Low Risk Group 1



- This projector is a Class 1 laser device that conforms with IEC 60825-1:2014, CFR 1040.10 and 1040.11, IEC 62471 Low Risk Group 1
- This projector has built-in Class 4 laser module. Disassembly or modification is very dangerous and should never be attempted.
- Any operation or adjustment not specifically instructed by the user's guide creates the risk of hazardous laser radiation exposure.
- Do not open or disassemble the projector as this may cause damage by the exposure of laser radiation.
- Do not stare into beam when the projector is on. The bright light may result in permanent eye damage.
- Without following the control, adjustment, or operation procedure may cause damage by the exposure of laser radiation.
- Adequate instructions for assembly, operation, and maintenance, including clear warnings concerning precautions to avoid possible exposure to laser and collateral radiation in excess of the accessible emission limits in Class 1.

Mimio/BOXLIGHT Warranty Historical Reference

BACKGROUND

This document contains the BOXLIGHT and Mimio warranty statements as of April 15, 2016 which were superseded by the revised and unified warranty whose effective date is proposed to be June 1, 2016.

It should be noted that BOXLIGHT had at least two warranty statements and these two conflicted in some areas.

The Mimio warranty would certainly win some prize for brevity, though not for clarity or completeness.

BOXLIGHT Warranties as of April 15, 2016

Standard Projector Warranty:

All BOXLIGHT projectors come with a three-year parts and labor warranty. BOXLIGHT warrants the products manufactured by BOXLIGHT are free from defects in materials and workmanship under normal use during the term of the warranty. The warranty covers parts and labor only, and does not include lamps or accessories.

Standard Lamp Warranty:

BOXLIGHT Inc. warrants lamps for 90 days or 500 hours, whichever comes first, from date of original shipment from BOXLIGHT Inc., or proof presented of shipment from dealer showing tracking information with weight or packing slip presented. This applies to lamp sales either as part of a projector, or sold separately.

Projector Extended Warranty:

BOXLIGHT Extended Warranty gives you peace of mind by extending the original warranty for an additional 1, 2, or 3 years. The warranty covers parts and labor only, and does not include lamps or accessories.

- 1 year (4 year total) extended projector warranty \$229 MSRP
- 2 year (5 year total) extended projector warranty \$359 MSRP
- 3 year (6 year total) extended projector warranty \$499 MSRP

Extended Lamp Warranty:

BOXLIGHT's Lamp Warranty extends the standard 90 day (or 500 hours warranty) to 1, 2 or 3 years depending on Lamp Warranty purchased. Customer is limited to a maximum of two (2) lamp replacements during the contract period. BOXLIGHT may require a unit to be sent in for repair or evaluation when multiple lamp claims are exercised within a shortened period. The warranty covers projector lamps and any possible defective parts causing premature lamp failure.

- 1 year extended lamp warranty \$225 MSRP
- 2 year extended lamp warranty \$275 MSRP
- 3 year extended lamp warranty \$350 MSRP
- [Product Warranty Statement](#)

LAMPS for LIFE:

"LAMPS for LIFE Warranty Program" provides a free replacement lamp for the life of the projector. Customer must send in failed lamp in order to receive replacement lamp. Customer is responsible for the shipping cost to and from. Prior to exchange of third lamp within "LAMPS for LIFE," BOXLIGHT may require an evaluation of your projector. This is to ensure premature failure is not a result of any other failed component and to provide any necessary cleaning of your equipment.

Excessive lamp use of more than 12 hours a day will void "LAMPS for LIFE" warranty. If projector is used in a smoke filled or other high pollutant environment, the projector must be equipped and operated with a harsh environment filter to be eligible for "LAMPS for LIFE." Terms and conditions state the lamp filter must be changed every 6 months and cleaned as necessary based on operating environment, end user must follow all other maintenance and operating procedures. Any lamp failure caused by accident, abuse, or failure to follow all maintenance and operating conditions

is not covered under "LAMPS for LIFE." During the first 90 days of purchase of projector or purchase of new lamp, lamp is covered under Standard Lamp Warranty. "LAMPS for LIFE" is subject to all terms, limitations and exclusions set forth in the limited warranty statement for the associated product.

Lamps for Life web page

Lamps for Life



Never buy another bulb, ever.

One low price equals a lifetime of lamps.



Always have a bright bulb.
It's the variable that can blow a budget: blown, burned-out bulbs, and their replacement costs. With Lamps for Life you pay a one-time fee that registers your projector into the program: \$99.00 for education users, \$299.00 for corporate customers.* That's it, for as long as you own your BOXLIGHT.

The savings are Brilliant.
Some conditions and maintenance requirements apply, but Lamps for Life is the no-hassles, low cost bulb strategy you've been waiting for. Exclusively, from BOXLIGHT. Your partner in brilliant, cost-effective presentations and teaching.

Lamps for Life applies to all BOXLIGHT Projectors Excluding Pro Series.
Limited availability on DLP™.

Lamps for Life is \$99 for Education and \$299 for Corporate.
Upgrade to Lamps for Life+ (where all shipping charges are included) at \$199 for Education and \$399 for Corporate.
More information on each can be found in the links below.

Lamps for Life - Education



Never buy another bulb, ever.

One low price equals a lifetime of lamps.



Always have a bright bulb.
It's the variable that can blow a budget: blown, burned-out bulbs, and their replacement costs. With Lamps for Life+ you pay a one-time fee that registers your projector into the program: \$199.00 for education users, \$399.00 for corporate customers and NO shipping costs.* That's it, for as long as you own your BOXLIGHT.

The savings are Brilliant.
Some conditions and maintenance requirements apply, but Lamps for Life+ is the no-hassles, low cost bulb program you've been waiting for. Exclusively, from BOXLIGHT. Your partner in brilliant, cost-effective presentations, teaching and solutions.

Lamps for Life+ applies to all BOXLIGHT Projectors Excluding Pro Series.
Limited availability on DLP™.

	replacement bulb cost	Lamps For Life+
replacement lamp #1	\$199	*\$199
replacement lamp #2	\$199	\$0
replacement lamp #3	\$199	\$0
	\$597	*\$199

Figures based on 5 year projector lifespan and replacing lamp 3 times.
Average lamp costs based on current retail from various manufacturers.

- All shipping charges paid for by BOXLIGHT.
- 3rd lamp exchange may require projector service & cleaning.
- Replacement lamp must be used for original enrolled projector only, using replacement lamp in any other projector will void Lamps for Life+ program.
- Excessive lamp use (over 12 hours/day) or using lamp in harsh environments without appropriate filtration and maintenance will void Lamps for Life+ warranty. *Harsh environment and smoke filters available for purchase. See warranty statement for additional info.
- Upon purchase into Lamps for Life+ program, BOXLIGHT projector & lamp serial numbers will be automatically enrolled. Warranty details included with shipment.

www.boxlight.com
 phone: 360-464-2119
 text "L4Lplus" to 51555

©2011 BOXLIGHT, Inc.
Terms & Conditions subject to change without notice.

Lamps for Life - Corporate



Never buy another bulb, ever.

One low price equals a lifetime of lamps.



Always have a bright bulb.

It's the variable that can blow a budget: blown, burned-out bulbs, and their replacement costs. With Lamps for Life+ you pay a one-time fee that registers your projector into the program: \$199.00 for education users, \$399.00 for corporate customers and NO shipping costs.* That's it, for as long as you own your BOXLIGHT.

The savings are Brilliant.

Some conditions and maintenance requirements apply, but Lamps for Life+ is the no-hassles, low cost bulb program you've been waiting for. Exclusively, from BOXLIGHT. Your partner in brilliant, cost-effective presentations, teaching and solutions.

Lamps for Life+ applies to all BOXLIGHT Projectors Excluding Pro Series. Limited availability on OLP-PA		
What you could spend over the course of 5 years for replacement projector lamps.		
	replacement bulb cost	Lamps For Life+
replacement lamp #1	\$199	*\$399
replacement lamp #2	\$199	\$0
replacement lamp #3	\$199	\$0
	\$597	*\$399

Figures based on 5 year projector lifespan and replacing lamp 3 times.
Average lamp costs based on current retail from various manufacturers.

- ALL shipping charges paid for by BOXLIGHT.
- 3rd lamp exchange may require projector service & cleaning.
- Replacement lamp must be used for original enrolled projector only, using replacement lamp in any other projector will void Lamps for Life+ program.
- Excessive lamp use (over 12 hours/day) or using lamp in harsh environments without appropriate filtration and maintenance will void Lamps for Life+ warranty. *Harsh environment and smoke filters available for purchase. See warranty statement for additional info.
- Upon purchase into Lamps for Life+ program, BOXLIGHT projector & lamp serial numbers will be automatically enrolled. Warranty details included with shipment.

www.boxlight.com
phone: 360-464-2119
text: "L4Lplus" to 51555

Lamps for Life information

- [Lamps for Life FAQ](#)
- [Lamps for life page](#)
- [Lamps for Life for education](#)
- [Lamps for Life for Corporate](#)

Flat Panel Warranty:

BOXLIGHT, Inc., ("Provider") is pleased to offer a standard three(3) year limited manufacturer's warranty ("Limited Warranty") against malfunction due to manufacturing defects in materials or workmanship on our hardware and accessories. The Limited Warranty applies only if: (1) the Provider Products are installed according to Provider's instruction provided to Customer and (2) the Provider Products are not misused or abused, and there is no evidence of mishandling, neglect, modification or repair without the approval of Provider, or damage done to Provider's Products by anyone other than Provider. The following is not included under this Limited Warranty: (1) Misuse or abuse by the Customer; (2) normal wear and tear; and (3) physical damage to Provider's Products as a result of unreasonable use and/or negligence. This Limited Warranty is provided by Provider, and it contains the only express warranty provided to Customer by Provider. Provider does not authorize any other person, including distributors, to give any other warranties on Provider's behalf. The repair or replacement as provided under the express limited warranty is the sole and exclusive remedy of the Customer and Provider's sole and exclusive liability hereunder. Provider disclaims any express warranty not provided herein and any implied warranty, guaranty or representation as to performance, quality and absence of hidden defects, and any remedy for breach of contract, which but for this provision, might arise by implication, operation of law, custom of trade or course of dealing, including implied warranties of merchantability and fitness for a particular purpose. In no event shall Provider be liable, whether in contract, tort (including negligence) or otherwise, for damages in excess of the purchase price of the product giving rise to the damages, or for any direct, indirect, incidental, special, punitive, exemplary, or consequential damages of any kind. Provider further disclaims any responsibility for losses, expenses, inconveniences, special, indirect, secondary, or consequential, incidental, and contingent damages whatsoever, including damages arising from ownership or use of provider's products. Provider shall bear no responsibility or obligation with respect to the manner of use of any equipment sold by Provider. Provider specifically disclaims and negates any warranty of fitness for a particular purpose of such equipment including, without limitation, any warranty that the use of such equipment for any purpose will comply with applicable laws and regulations or overcome any specific hearing/auditory processing deficit. When returning units for service, use adequate packaging to prevent shipping damage. Shipping damage is not covered under warranty. If during standard troubleshooting Provider Support determines the ProColor Panel

cannot be fixed via phone, Provider will provide a replacement panel of equal or better quality that will be shipped within 48 to 72 hours from the time of the reported failure unless other contractual arrangements have been made directly with Boxlight. All replacement ProColor Panels will ship via standard 3 to 5 day ground freight service, paid by Provider. The customer is responsible for all costs associated with removal and packaging of the defective panel and the installation of the replacement panel. The defective panel must be ready for return shipment within 10 days of receipt of the replacement panel. Provider will then arrange for the pickup and return shipping of the defective panel. If Provider is not notified that the defective panel is ready for return shipment the customer will be responsible for the return cost of the defective panel, and if it is not received within 30 days customer will be responsible for the full cost of the replacement panel and the defective panel.

The “Other” BOXLIGHT Warranty

From (note NetSuite URL showing up – red color added for visibility):

https://system.netsuite.com/core/media/media.nl?id=211327&c=492114&h=b337ff4ec39bcec928c6&_xt=.pdf&ck=SF3TEWglAoxPTd66&vid=SF3TEWglAo1PTaTa&cktime=140623&addrcountry=US

LIMITED WARRANTY BOXLIGHT Incorporated ("BOXLIGHT") warrants that each BOXLIGHT projector and BOXLIGHT interactive flat panel ("the Product") sold hereunder will conform to and function in accordance with the written specifications of BOXLIGHT. Said limited warranty shall apply only to the first person or entity that purchases the Product for personal or business use. Said warranty shall continue for a period of five (5) years for projectors and three (3) years for interactive flat panels, when the product is purchased from a Premier Partner. All others receive a three (3) years warranty on projectors and two (2) year warranty on interactive flat panels. All warranties commence on the date of purchase and are Parts and Labor only. BOXLIGHT does not warrant that the Product will meet the specific requirements of the first person or entity that purchases the Product for personal or business use. Lamp is warranted for 90 days or 500 hours (whichever comes first). Accessories are warranted for 1 year from date of purchase and include all product accessories that are not a projector or panel. BOXLIGHT liability for the breach of the foregoing limited warranty is limited to the repair or replacement of the Product, at BOXLIGHT's sole option. To exercise the Purchaser's rights under the foregoing warranty, projector must be returned to BOXLIGHT at Purchaser's sole cost and expense. BOXLIGHT will pay for return shipping to customer. Warranty service for Interactive Flat Panels shipping shall be covered to and from BOXLIGHT or an authorized service center. However, that the Product must be accompanied by a written letter explaining the problem and which includes (i) proof of purchase; (ii) the dealer's name; and (iii) the model and serial number of the Product. A return authorization number, issued by the BOXLIGHT customer service department, must also be clearly displayed on the outside of the shipping carton containing the Product, or shipment will be refused. WARRANTY LIMITATION AND EXCLUSION BOXLIGHT Incorporated shall have no further obligation under the foregoing limited warranty if the Product has been damaged due to abuse, misuse, neglect, accident, unusual physical or electrical stress (unusual physical and electrical stress includes unusually long operation, exposure to smoke and other airborne contaminants), unauthorized modification, tampering, alterations, or service other than by BOXLIGHT or its authorized agents, causes other than from ordinary use or failure to properly use the Product in the application for which said Product is intended. DISCLAIMER OR UNSTATED WARRANTIES The warranty printed above is the only warranty applicable to this purchase. All other warranties express or implied, including, but not limited to, the implied warranties or merchantability and fitness for a particular purpose are disclaimed. There are no warranties that extend beyond the face hereof and the foregoing warranty shall not be extended, altered or varied except by written instrument signed by BOXLIGHT Incorporated. It is understood and agreed that BOXLIGHT's liability whether in contract, in tort, under any warranty, in negligence or otherwise shall not exceed the return of the amount of the purchase price paid by purchaser and under no circumstances shall BOXLIGHT be liable for special, indirect or consequential damages. The price stated for the Product is a consideration in limiting BOXLIGHT's liability. No action regardless of form, arising out of the agreement to purchase the product may be brought by purchaser more than one year after the cause of action has accrued. FOR MORE INFORMATION, CONTACT: BOXLIGHT Incorporated PO Box 2609 151 State Highway 300, Suite A Belfair, WA 98528 www.boxlight.com U.S. and Canada 360.464.2119

The Mimio Warranty

Mimio warrants all our hardware (excluding batteries and the MimioProjector™ bulb) to be free of defects and to perform as specified under normal classroom conditions for a period of 2 years from purchase. The 2-year product warranty can be extended for all hardware except the MimioProjector interactive projector and the MimioDisplay™ touch display for an additional 3 years, with registration online at mimio.com/registration within 90 days of product receipt date. The MimioProjector bulb is guaranteed for 90 days. The rechargeable batteries provided with MimioVote™ handsets are under warranty for a period of 2 years from the date of purchase. A replacement pack is available for purchase. MimioStudio™ software is supplied with a limited lifetime warranty, expiring 1 year after discontinuation of product, to perform as specified with the computer operating systems supported in the product specification.

=====