

QUICK SPECS

Compaq MP1800
Microportable Projector

MODELS

Compaq MP1800
Microportable Projector

Models

180226-001 – North America

180226-011 – Australia, New Zealand

180226-021 – Europe


180226-AA1 – China

180226-031 – UK

180226 - B24 – International

Option Part Numbers

189789-001 - Lamp

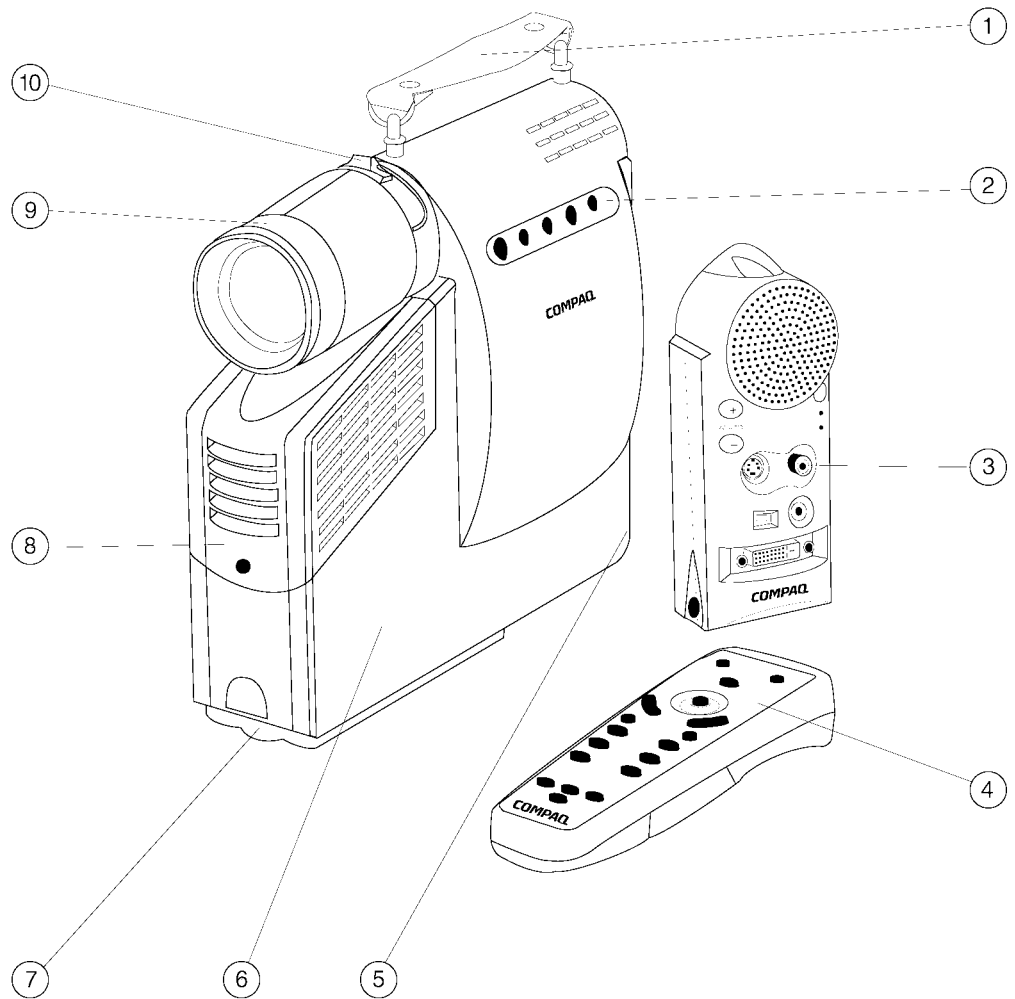

1. Handle
2. Onscreen display (OSD) menu buttons
3. Multimedia Adapter with integrated 8 Watt Premier•Sound speaker
4. Full featured remote control with remote mouse
5. Power On/Off and VGA/DFP cable connectors
6. Rugged magnesium casing
7. Stability Foot
8. Easily removable lamp housing
9. Focus Adjustment
10. Integrated zoom lens

QUICK SPECS

Compaq MP1800
Microportable Projector

AT A GLANCE

Compaq MP1800 Microportable Projector

- 4.6 lbs/175 cubic inches
- 700 lumens
- Texas Instruments DLP technology
- Native XGA resolution
- Integrated zoom lens
- Multimedia adapter and remote control
- Two-year worldwide limited warranty

SPECIFICATIONS

Brightness	700
Portability	
General	Fits in existing notebook carrying case along with notebook computer. Additional dual projector/portable bag also included.
Size/Volume (HxWxD)	8.25 x 2.5 x 9 in and 175 cubic in/ 20.9 x 6.25 x 22.84 cm and 2,861 cubic cm
Weight	4.6 lbs/2.09 kg
Casing	Magnesium (Stronger than plastics; 30% lighter than aluminum)
Display Resolution	Displays native XGA (1024 x 768) resolution but will automatically scale up from SVGA or scale down from SXGA to fill screen. Will also scale from Macintosh 832 x 624 compatible.
Image Quality	
Technology	Texas Instruments Digital Light Processing (DLP) technology
Contrast	400:1 contrast full-on; 150:1 checkerboard
Color	SMPTE-C, 24 bit, 16.7M
White Point	7400° Kelvin
Uniformity	90% or better
Plug and Play	Yes
Lens	
Type	Adjustable Focal Length Zoom lens (1.3x) and manual adjustable focus
Throw Ration (D/W)	2:22 – 2.87:1
Lens Height	6in/15.18 cm
Throw distance	3' to 30'
Offset	123% of image above centerline
Focus	Manual focus via focus ring around lens
Keystoning	Digital keystone correction
Connectivity	
Signal Interface	Standard analog VGA, digital DFP, DVI, S-Video, RCA Video, and audio cables
User Interface	Standard Compaq 3 button OSD (includes zoom and keystone correction), Power and Resynch
Standards Supported	VGA, DFP and DVI
USB Capabilities	8-pin to USB/RS-232 cable included with Multimedia Adapter for remote mouse functions Supports VGA, SVGA, XGA and SXGA resolutions
Approvals/Certifications	
CE	Yes
C.I.S.P.R.	Yes
VDE / TUV	Yes
UL Approval	Yes
FCC Class B Approval	Yes
Multimedia Adapter	Yes
Remote Control	Yes
On-Screen Controls	Yes
Language Selection	
English	Yes
German	Yes
French	Yes
Spanish	Yes
Italian	Yes
Brazilian Portuguese	Yes
Dutch	Yes

SPECIFICATIONS *(continued)*

User Controls

Brightness, Contrast	Yes
Positioning	Yes
Keystone Correction	Yes
Digital Zoom	Yes
Clock	Yes
Clock Phase	Yes
Color Temperature	Yes
Picture Control	Yes
Picture-In-Picture Control	Yes
Menu Location Control	Yes
Power Saver	Yes
Lamp Hours	Yes
Lamp Hours Reset	Yes
Standby Lamp Delay	Yes
Serial Number	Yes
Master Reset	Yes
Image Control (upside down, reverse, upside down and reversed)	Yes

Tilt Feature

10 degrees and up

Horizontal Frequency

15 to 69 kHz for analog signals and 15 to 60 kHz for digital signals

Vertical Frequency

48 to 85 kHz for analog signals and 48 to 75 kHz for digital signals

Power Consumption

65 Watts (standby)/185 Watts (full power)

Operating Temperature

50° to 104°F/10° to 40°C

Operating Humidity

20% to 80%

Video

Projector is capable of displaying video from a VGA or DFP source (example: DVD on Portable PC). Video and S-Video capability (from DVD, Camcorder, or VCR) through the included multimedia adapter

Audio

Multimedia adapter has integrated 8W *Premier•Sound* speaker system.

Power supply

90V to 255V Fully US and European compliant (auto switching); warm restrike after 45 seconds

Lamp/Module

User Replaceable

Warranty

The MP1800 comes with a two-year worldwide limited warranty. 2-year mail-in warranty in North America and all countries but Europe. Advanced Unit Replacement program in Europe offers a new or "like new" replacement of a defective unit in 48 hours during the two year warranty period. There is a 90-day or 1,000 hour (whichever comes first) standard bulb warranty. Within the bulb warranty period, defective bulbs will be replaced via overnight shipment. Multimedia adapter comes with a two year worldwide limited warranty. Compaq's toll-free telephone hotline support is available 7 x 24 (terms and conditions vary from region to region).