

## Key Features

Bright Images in any Environment | Large Images in Small Spaces |  
 Long-lasting Laser Phosphor Light Source | Horizontal and Vertical  
 Keystone Correction | Compatible with Interactive Whiteboard Module




## Product Description

Featuring 1024x768 XGA resolution and 3,200 lumens of brightness, the ViewSonic® LS625X short throw laser projector is an ideal projection solution for education environments. Designed with a laser phosphor light source lasting up to 20,000 hours, and a sealed optical engine with a waveform air filter that protects against dust and moisture, this projector delivers long-term, virtually maintenance-free usage for any classroom. With its 0.49 short throw ratio and horizontal/vertical keystoneing, the LS625X makes installation a hassle-free experience. What's more, the short throw ratio allows you to place the projector just a few feet from a wall or screen to give you a huge image for less cost than a comparably sized display. Crestron and AMX certification delivers network management capabilities, while exclusive SuperColor™ technology offers a wide color range for true-to-life images in any classroom.



01 Projection Lens  
 IR Remote Sensor  
 Focus/Zoom Rings  
 RS-232  
 LAN  
 USB 5V/2A Out

02 12V Trigger  
 AC In  
 HDMI  
 Monitor Out  
 Control Panel  
 S-Video

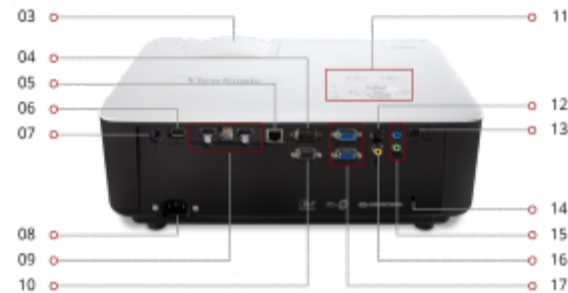

03 Mini USB  
 Kensington® Lock Slot  
 Audio In/Out  
 Composite  
 Computer In


04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17



1024 x 768  
**RESOLUTION**



3,200 ANSI  
**LUMENS**



0.49  
**THROW RATIO**

### Contact Sales

- call: 888.881.8781
- email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)
- visit: [viewsonic.com](http://viewsonic.com)

**Display:**

Type:	DLP Lamp
Resolution Type:	XGA (1024x768)
Resolution:	1024 x 768
Brightness (Lumens):	3,200 ANSI
Display Size (in.):	60 - 300 in. / 1.5 - 7.6 m
Throw Distance:	2.1 - 10.4 ft / 0.6 - 3.2 m
Throw Ratio:	0.49
Keystone:	Vertical (+/- 40°)
Lens:	Fixed Zoom
Light Source Life, Normal (hours):	20000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07B Color (R/G/B 10bit)
Aspect Ratio:	4:3

**Video Signal:**

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

**Compatibility:**

PC Resolution (max):	1920 x 1080
Mac® Resolution (max):	1920 x 1080

**Connector:**

Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4(1), HDMI 1.4 (with HDCP 1.4)(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1)

**Audio:**

Internal Speakers:	10W (x1)
--------------------	----------

**Power:**

Consumption (typical):	305W
Stand-by:	<0.5W

**Controls:**

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

**Operating Conditions:**

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

**Additional Hardware:**

Kensington Lock Slot:	1
-----------------------	---

**Weight (imperial):**

Net (lbs):	13.6
Gross (lbs):	15.4

**Weight (metric):**

Net (kg):	6.2
Gross (kg):	7.0

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	19.1 x 9.4 x 15.4
Physical (in.):	15.1 x 5.8 x 11.5

**Dimensions (metric) (WxHxD):**

Packaging (mm):	485.0 x 238.0 x 390.0
Physical (mm):	383.0 x 147.0 x 291.0

**General:**

AV Control: AMX Certified, Crestron Certified, PJ Link Certified

Regulations: FCC, cTUVus, ROHS

PACKAGE CONTENTS: LS625X projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on the light source, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907979916

**Accessories:**

HB10B, IFP2710, PGD-350, PJ-IWBADP-008, PJ-SCW-1001W, PJ-VTOUCH-10S, PJ-WMK-30S, VC10, VCB10