
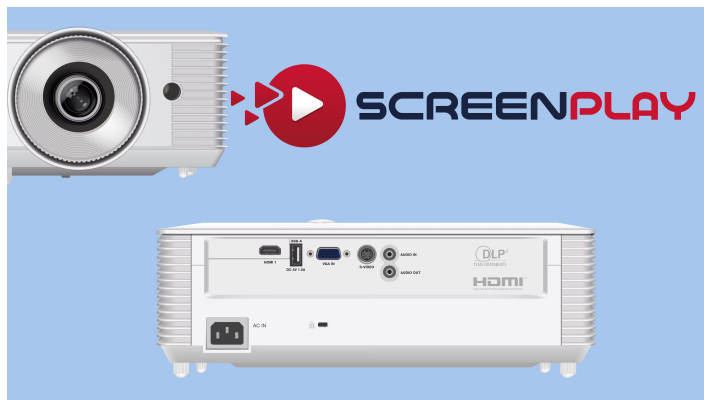


# SCREENPLAY GENESIS I SERIES SP122

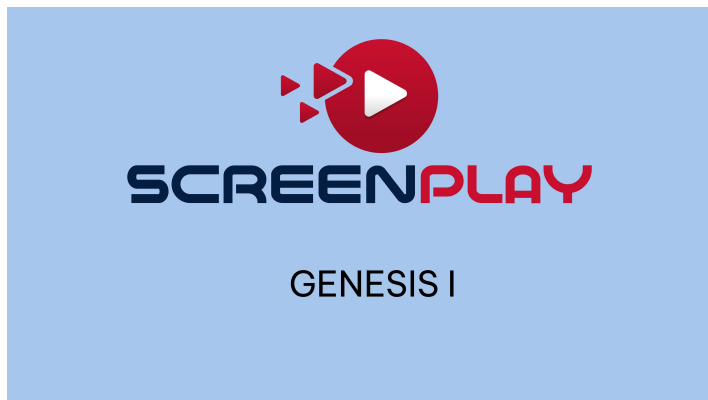

## SVGA - 4000 \* - 4:3 Aspect Ratio

The ScreenPlay Genesis I DLP projectors offer an outstanding price performance ratio ultra-long lamp life, high brightness, and digital and analogue connectivity. Designed for tight budgets while not sacrificing on image quality or performance.

- Perfect images.
- Vibrant colours.
- Outstanding readability and contrast
- Compact and lightweight form.
- Versatile portable display solution.

The complete Genesis Series is also easy on the eye with its sleek matte white finish. Understated branding with accessories to match.

## Features

### Full 3D

Display 3D content from almost any 3D source, including 3D Blu-ray players and the latest game consoles.

### USB-A Power for Devices

Power your external devices like Google Chromecast with Amazon TV with the convenient USB-A input on the projector.

### Industry-leading Lamp Life

An unprecedented 15,000 hours of lamp life when used in Dynamic Mode. With no filters to replace.

### High Brightness

Get better, brighter images on any surface, in any light, with 4000 lumens on the standard throw models and 3800 lumens on short throw models.

### Advanced Digital Image Correction

With the new digital edge masking and image shift features – we make getting those final image adjustments perfect.

### 24/7 Operation

They are designed to operate 24 hours a day in standard orientation. Perfect for applications where prolonged periods of use are required.

### Direct Power On/ Direct Power off

Instant power up when the projector receives an electric current, ideal for use in rooms with a “master” power switch. When you are finished power the unit down and go, no need for lengthy cooling period before your projector can be packed away.

### Low Latency Gaming Mode

Improved communication time from the input source to your projector allows for an enhanced gaming experience.

## Image

Projection Technology

Texas Instruments DLP®

Size

0.55" DMD

|                                 |             |
|---------------------------------|-------------|
| Native Resolution               | SVGA        |
| Pixels                          | 800 x 600   |
| Aspect Ratio                    | 4:3         |
| Contrast Ratio                  | 30000:1     |
| Brightness (Lumens)             | 4000        |
| Light Source                    | UHP Lamp    |
| Light Source Life Maximum Hours | 15000       |
| Maximum Supported Resolution    | 1920 x 1200 |
| Horizontal Sync. Range (KHz)    | 15 ~ 97.55  |
| Vertical Sync. Range (Hz)       | 54 ~ 85     |
| Uniformity (%)                  | 80          |

## Optical

|                                              |                           |
|----------------------------------------------|---------------------------|
| Lens                                         | 1.1x                      |
| Lens Zoom Adjustment                         | Manual                    |
| Optional Lenses                              | -                         |
| Image Offset (%)                             | 115                       |
| Focal Length (mm)                            | 21.85 ~ 24.01             |
| F-Stop                                       | 2.41                      |
| Vertical Lens shift (%)                      | -                         |
| Horizontal Lens shift (%)                    | -                         |
| Keystone Adjustment                          | Manual/Automatic          |
| Vertical Keystone Correction                 | ± 40°                     |
| Horizontal Keystone Correction               | -                         |
| Projection Factor                            | 1.94 ~ 2.16:1             |
| Projection Distance (Meters/Feet)            | 1.2 ~ 12.0 / 3.94 ~ 39.36 |
| Optical Zoom                                 | 1.1:1                     |
| Digital Zoom Demagnification / Magnification | 0.8x ~ 2.0x               |
| Focus Adjustment                             | Manual                    |

## Connectivity

|                      |                                                                                         |
|----------------------|-----------------------------------------------------------------------------------------|
| Inputs               | Mini D-sub 15-pin (VGA), S-Video, HDMI™ 1.4, 3.5 mm Stereo Mini Jack, USB-A for Service |
| Outputs              | 3.5 mm Stereo Mini Jack, Powered USB-A for Wireless Dongle                              |
| Networking & Control | -                                                                                       |
| Embedded System      | -                                                                                       |
| 3D                   | Full 3D All Major Formats                                                               |

## Power

|                                       |                            |
|---------------------------------------|----------------------------|
| Power Supply                          | 100 ~ 240 V AC; 50 ~ 60 Hz |
| Power Consumption Max (W)             | 267                        |
| Power Consumption Min. (W)            | 210                        |
| Power Consumption Network Standby (W) | -                          |
| Power Consumption Standby (W)         | <0.5                       |

## Physical

|                                      |                                     |
|--------------------------------------|-------------------------------------|
| Net Dimensions (L x W x H) (mm / in) | 313 x 236 x 96.4 / 12.4 x 9.3 x 3.8 |
|--------------------------------------|-------------------------------------|

|                                            |                                                    |
|--------------------------------------------|----------------------------------------------------|
| Product Weight (Kilograms/Pounds)          | 2.9 / 6.4                                          |
| Packaged Dimensions (L x W x H) (mm / in)  | 395 x 337 x 166 / 15.6 x 13.3 x 6.5                |
| Packaged Weight (Kilograms/Pounds)         | 4.1 / 9.0                                          |
| Fan Noise (dB)                             | 27                                                 |
| Audio (W)                                  | 1 x 3                                              |
| Operating Temperature (Celsius/Fahrenheit) | 5 ~ 40 / 41 ~ 104                                  |
| Operating Humidity (%)                     | 10 ~ 85                                            |
| Max Operating Altitude (meters / feet)     | 3048 / 10000                                       |
| Storage Temperature (Celsius/Fahrenheit)   | -10 ~ 60 / 14 ~ 140                                |
| Storage Humidity (%)                       | 10 ~ 85                                            |
| Security                                   | Kensington Security Slot™, PIN Code Lock & Timer   |
| Safety and Regulatory                      | CB, CE, EAC, cTUVus, CCC, FCC, UKCA, NOM, PSB, BIS |
| Environmental                              | WEEE, EU RoHS, China RoHS, CEL, CECP               |

Copyright © 2022, InFocus and its logo is a registered trademark of InFocus Corporation. Maxnerva Technology Services Limited is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted; all specifications are subject to change without notice. All images are for representation purposes only and may be simulated.