




LC-UXT1

UXGA

Theater Projector

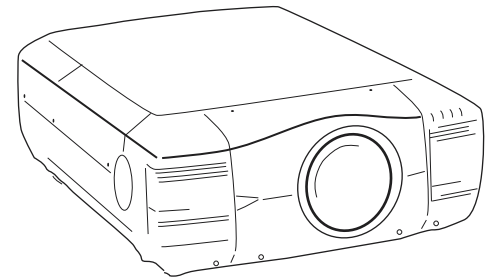

LC-UXT1

KEY FEATURES: Model LC-UXT1

- 7700 ANSI Lumens bright at 90% uniformity and a 700:1 contrast ratio.
- Projects 1600 x 1200 pixels, for real UXGA resolution.
- Supplied without lens. Wide Choice of lenses available.
- Projects images up to 40' wide (600" diagonal).
- Power Lens Shift offsets the image up & down and left & right.
- 230 MHz dot clock for compatibility with most workstations.
- Smart data compression/expansion: compatibility with UXGA~VGA, MAC.
- Compatible with most signal input, including DVI, RGB, Y/C, DVD, HDTV.
- Displays video 4:3 & 16:9 in NTSC/PAL/SECAM/NTSC 4.43/PAL-M/PAL-N.
- Video scaling. Progressive scan optimizes HD stills and animation.
- Digital Video Noise Reduction optimizes video image.
- 4 input channels. Interchangeable input modules permit reconfiguration.
- Wireless/wired remote with mouse control and laser pointer.
- 3 Year* Warranty.

INCLUDED ACCESSORIES: Owner's Manual. AC Power Cord 10' (3.m), Lens Aperture Cover. Computer Input Cable 6' (1.8m) HD15~HD15. DVI Input Cable. DVI~HD15 Adapter. MAC Adapter. Wireless/wired Remote with Mouse Control and Laser Pointer & 2 x AA batteries and 1.5M wired remote cable. Mouse cables 9' (2.75m) each for PS/2, Serial Port, ADB Port. Dust Cover.

OPTIONAL ACCESSORIES: Telephoto, Midrange & Wideangle Lenses. Replacement Lamps. Additional DVI, 5 BNC, Y/C & HD15 Input Modules. HD-SDI Input Module. Upconverter Input Module. Hard Shipping Case with wheels and telescoping handle. Ceiling Mount and Post & Plate. Stack Stand.

SPECIFICATIONS: Model LC-UXT1

Screen Brightness	7700 ANSI Lumens	Computer: Image Sizing	Normal or Smart expanded
Illumination Uniformity	90%	Video: Standards	NTSC/PAL/SECAM/NTSC 4.43/PAL-M/PAL-N
Size of Color Palette	16.7 Million	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Contrast Ratio	700:1 (Full ON/OFF)	Video: Image Sizing	Progressive Video Scaling
Horizontal Resolution	1100 TV Lines (HDTV)	Video: Systems	Composite, S-Video, Component (DVD & HDTV)
Projection Lamp	200 Watt UHP x 4	Input Channels	4
Imaging System	1.8" PolySilicon active matrix TFT Panels x 3	Input Modules	(Interchangeable: standard configuration below):
Screen Pixels	1600 x 1200 in stripe configuration	1: DVI	DVI x 1 data, RCA x 2 audio, 8-pin DIN x 1 control
Total Pixels	5,760,000 ((1600 x 1200) x 3)	2: RGB/DVD/HD	BNC x 5 video, RCA x 2 audio, 8-pin DIN x 1 control
Lens	Not included. Select lens from Optional Lens Chart.	(RGB G-sync, RGB H+V, RGBHV, Component and Y, Pb/Cb, Pr/Cr)	
Lens Speed & Focal Length	See specifications of selected lens.	3: Y/C	BNC x 2 & S-Video x 1 video, RCA x 2 audio
Lens Ratios	See specifications of selected lens.	4: PC	HD15 x 1 data, RCA x 2 audio, 8-pin DIN x 1 control
Image Diagonal	40~600 in.	Audio: Output - Line	(Stereo) RCA x 2 (L & R)
Image Width	2.67 ~ 40 ft. (0.82 ~ 12.2m)	Audio: Output - Amplifier	3 Watts RMS (each L&R) Stereo
Throw Distance	See specifications of selected lens	Audio: Output - Speakers	3.1 in. (8 cm.) x 2
Front Elevation	up to 5.7° up	Fan Noise	46 dBA
Lateral Adjustment	Power Lens Shift, Ratio (L:R) 11:9~9:11	Size (H x W x D)	9.9 x 22.9 x 30.8 in. (251.5 x 581.2 x 783 mm.)
Anti Keystone	Power Lens Shift, Ratio (T:B) 10:0~0:10	Weight	78.3 lbs. (35.5 kg.)
Keystone Correction	Digital: Variable Adjustment +40° ~ -40°	Packaged Size (H x W x D)	26.1 x 34.7 x 48.4 in. (662 x 880 x 1228 mm.)
Scanning Frequency	Auto: H Sync. 15-120kHz; V Sync. 50-120Hz	Packaged Weight	109.2 lb. (49.5 kg.)
Dot Clock	230 MHz	Power Requirements	100~120/200~240V AC, 50/60Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption / Heat	1150 Watts / 3925 BTU/hr. (989 Kcal/hr.)
Local Control / Power Management	Full Function / Auto Shut-Off	Power Cord	10' (3.m) Type 3, Detachable
Remote Projector & Mouse Ctrl	Wireless/Wired x 1 w/ Laser Pointer	Safety Compliance	UL Listed
Mouse Control Ports	(On input modules 1, 2 & 4) Mini DIN x 3; USB x 1	Operating Temperature	41°~95°F (5~35°C)
Wired Remote Jack	Mini Stereo x 1	User Maintenance	Clean Air Filter, Replace Lamp
RS-232 Control Port	(In & Out) Dsub9 x 2	Warranty: Projector	3 Yr / 6000 Hr * (Parts/Labor to Correct Defects)
Computer Native Resolution	1600 x 1200 (UXGA & MAC)	Warranty: Lamp	.90 Days (Failed Lamp Replaced Pro-Rata)
Computer Compatibility	UXGA, SXGA, XGA, SVGA, VGA & MAC		* whichever occurs first

The following warning is required by the US FDA and pertains to the laser pointer in the wireless remote control of this projector.
Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 660 +/- 20 mm. Class II Laser Product.

Specifications subject to change without notice. ©2002 EIKI International, Inc. Issued February 01, 2002.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
 In Canada, 310 First St. - Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com
Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>