


KEY FEATURES: Model LC-XNB4MS

- Weighs less than 9 lbs! Footprint similar to a legal notepad!
- 2000 ANSI Lumens, 85% uniformity, and 350:1 contrast ratio.
- 3 panel LCD imaging delivers a rich, color saturated picture.
- True XGA resolution. SXGA, XGA, SVGA, and VGA compatible.
- Quiet operation: fan noise as low as 37 dBA.
- Smart data compression / expansion, and video scaling.
- Power zoom and focus. Digital keystone correction.
- Wireless remote with mouse. 7X digital zoom.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- Supports HDTV Input at 480i/p, 575i/p, 720p, 1035i, and 1080i.
- 3 Year* Projector Warranty!

XGA Notebook Projector

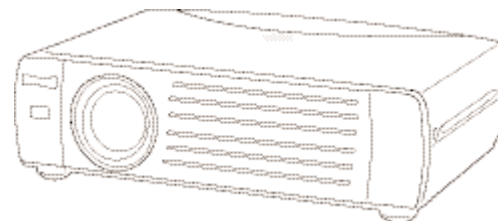

LC-XNB4MS

INCLUDED ACCESSORIES: Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable with DVI-1-HD15 Adapter. Wireless Remote Control With Mouse and Batteries (AA x 2). Mouse cable for computer PS/2 Port. Stereo Audio Cable. Composite Video Cable. Soft Carry Bag.

OPTIONAL ACCESSORIES: Replacement Lamp. MAC Adapter. MAC Monitor Cable. 9 Pin Serial cable for mouse & RS-232 communications. Mouse cable for ADB port. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels & Telescoping Handle. Ceiling Mount. Ceiling Post & Plate. 33' (10m). Mouse Extension Cable for Control Port. Media Card Imager (Compact Flash Computerless Slide Show System). Wireless Imager (WiFi Content Delivery and Projector Control System).

SPECIFICATIONS: Model LC-XNB4MS

Screen Brightness	2000 ANSI Lumens
Illumination Uniformity	85%
Size of Color Palette	16.7 Million
Contrast Ratio	350:1 (Full ON/OFF)
Horizontal Resolution	800 TV Lines
Projection Lamp	200 Watt UHP
Estimated Lamp Life	2000 Hours
Imaging System	0.9" PolySilicon active matrix TFT Panels x 3
Screen Pixels	1024 x 768 in stripe configuration
Total Pixels	2,359,296 ((1024 x 768) x 3)
Lens Type	Power Zoom and Focus
Lens Specs	Speed: f:1.9-2.1; FL: 0.84-1.01 in. (21.3-25.6 mm)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.15-1.39:1
Image Diagonal	31-300 in. (78.74-762 cm)
Image Width	2-20 ft. (0.6-6.1 m.)
Throw Distance	3.6-27.7 ft. (1.1-8.44 m.)
Front Elevation / Maximum Tilt	up to 15.6° up / +/- 20°
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 9:1
Vertical Keystone Correction	Digital: up to 20° up or down
Horizontal Keystone Correction	Digital: up to 10° left or right.
Scanning Frequency	Auto: H Sync. 15-100kHz; V Sync. 50-100Hz
Dot Clock	140 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shut-Off
Remote Proj & Mouse Ctrl	Wireless (Infra Red) x 1
Control Port (Mouse / RS-232)	USB x 1, Mini DIN 8 Pin x 1
Computer Native Resolution	1024 x 768 (XGA)
Computer: Compatibility	SXGA, XGA, SVGA, VGA
Computer: Formats	1280x1024, 1024x768, 800x600, 640x480
Computer: Higher Resolutions	Displayed panned or Smart Compressed

Computer: Lower Resolution	Displayed normal or Smart Expanded
Computer: Channels	1
Computer: Inputs	DVI-1 x 1 (HD15 via Cable with Adapter)
Computer: Audio In	Stereo: MiniStereo x 1
Computer: Monitor Out	HD15 x 1
Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Video: Channels	1
Video: In	RCA x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr) S-Video x 1
Video: Audio: Input	RCA x 2 (L&R)
Audio: Amplifier	Mono: 1 Watts RMS
Audio: Built In Speaker	1.58 x 1.18 in. (4x3cm) x 1
Audio: Line Output	RCA x 2 (L&R)
Fan Noise	37 dBA
Cabinet Size** (HxWxD)	2.5 x 13.1 x 10.3 in. (89.5 x 333 x 260.9 mm.)
	** excluding foot
Weight	9.5 lbs. (4.3 kg)
Packaged Size (H x W x D)	15 x 18 x 14 in. (379 x 457 x 356 mm)
Packaged Weight	19.4 lb (8.8 kg)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption / Heat	300 W / 1024 BTU/hr (258 Kcal/hr)
Power Cord	10' (3M) Type 3, Detachable
Safety Compliance	UL Listed
Operating Temperature	41-95°F (5-35°C)
User Maintenance	Clean Air Filter, Replace Lamp
Security Facilities	Kensington® Security Slot
Warranty: Projector	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata)
	* Whichever occurs first

Specifications subject to change without notice. ©2002 Eiki International, Inc. Issued June 12, 2002

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688. Tel: 800-242-3454; Fax: 800-457-3454, E-mail:usa@eiki.com
 In Canada, 310 First St. - Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com
Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>