



Install the flexibility of Toshiba

TLP-X4100



4100 ANSI lumens

True XGA (1024 x 768) resolution

800:1 contrast ratio

Multiple inputs

Optional lenses

Choose freedom.

TOSHIBA



TLP-X4100

Amazing brightness for any venue.

When you're investing in an installation projector for your conference or venue facility you want to be sure that you're spending wisely. You won't currently find a better projector to put your money into than a Toshiba TLP-X4100.

4100 ANSI lumens of brightness guarantee maximum impact – whatever the size of your audience. With a selection of lenses to choose from it doesn't matter what your environment's like, you can be sure you'll get it right with one of them.

Couple this with multiple inputs and the TLP-X4100 is flexible enough to cater for any kind of presentation in any kind of room. An installation model with options that put you in complete control.

It's HDTV compatible and benefits from the latest in pixel perfect digital keystone correction. It features powered zoom, focus and lens shift and even an 'eco mode' giving the option of reducing fan noise to a mere whisper. Toshiba even gives you a comprehensive 3 year warranty. Trust Toshiba to come up with all the answers!

Stunning Images

- 4100 ANSI lumens
- XGA resolution
- 800:1 contrast ratio

Flexibility

- Vertical and horizontal keystone
- Multiple inputs
- Optional lenses


User Friendly

TLP-X4100 Specification	
Display	3 x 1.3" TFT LCD
Resolution	XGA (1024 x 768)
Brightness (ANSI)	4100
Colour reproduction	16.7m colours
Picture format	4:3
Contrast ratio	800:1
Lamp	275W
Service life of lamp	1000 hours
Horizontal/vertical frequency	fH15-100kHz, fV50-100Hz
Video compatibility	PAL, NTSC, SECAM
Lens	Zoom lens F=1.7-2.0 / f=48.2-62.6 mm Powered Zoom, Focus, Lens Shift
Digital keystone correction	Verticle +/- 40% Horizontal +/- 10%
Picture size (Diagonal)	Standard Lens: 0.8-10.1m (31-400")
Projection distance	Standard Lens: 1.4-14.7m (4.6-48.3ft)
Throw ratio	Standard Lens: 1.8-2.4:1
Inputs	RGB (D-sub 15-pin), DVI Terminal (Digital), Audio (Stereo Mini Jack), BNC x 5 (Green, Blue, Red, H Sync, V Sync), Component Video, Composite Video, S-Video, USB, RS232C, Wired Remote
Power supply	AC 100-240V, 50-60Hz
Power Consumption	380W
Audio	Integrated 2 x 2W loudspeaker
Dimensions (W x H x D)	319 x 168 x 470mm
Weight	8.4kg
Operating noise	35dB (Eco Mode)
Warranty	3 year
Accessories	Owner's Manual, AC Power Cord, Wireless/Wired Remote Control Transmitter and Batteries, Remote Control Cable, VGA Cable, MAC/VGA Adapter, 3 Types Control Cable (For PS/2, Serial and ADB port), Protective Dust Cover, Lens Cover
Optional Accessories	Replacement Lamp (TLPLX40), brackets, lenses

Optional lenses	Part number	Throw ratio	F stop
Long Throw Zoom Lens	TLP-LLZ3	2.4-4.3:1	2.0-2.9
Short Throw Zoom Lens	TLPLSZ1	1.3-1.8:1	2.5-3.0
Short Throw Fixed Lens	TLPLWF1	0.8:1	2.6



Projection distance

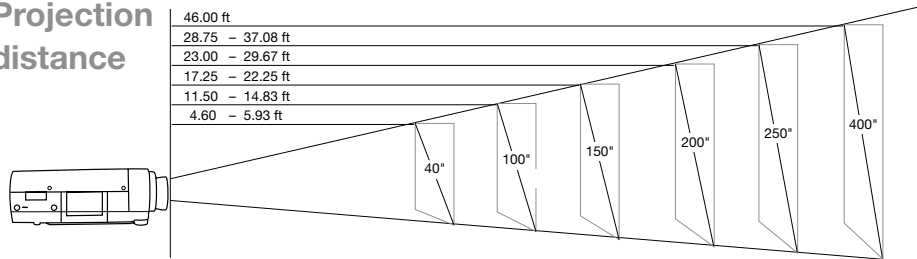

Diagonal screen size (inches)	Image width (inches)	Minimum distance (feet)	Maximum distance (feet)
40	32	4.6	5.93
100	80	11.50	14.83
150	120	17.25	22.25
200	160	23.00	29.67
250	200	28.75	37.08
400	320	46.00	-

Toshiba Information Systems (UK) Limited.,
Consumer Products Division,
Toshiba House, Frimley Road,
Camberley, Surrey GU16 7JJ.

Product design and specification subject to change or modification without notice.

TPR0018/1

Choose freedom.

TOSHIBA

For further information on the Toshiba range of projectors contact your nearest Toshiba Authorised Reseller or call Toshiba on: 08704 423433 or e-mail: enquiries@toshiba-tuk.com