

TOSHIBA

mobile **d1 & d2**



a l w a y s o n t h e m o v e

2100:1 Contrast Ratio

XGA 1024 x 768

2500 Ansi Lumens (D2)

2.4kg



A winning combination of performance and light weight make this projector a valuable presentation tool for any environment.

At 2500 Ansi Lumens the D2 provides a bright image that can compete with almost any presentation environment. Both models also feature an eco mode function that reduces noise levels and extends lamp life when the full brightness is not required.


Operation is simple thanks to the automatic image set up and auto keystone correction, combined with an intuitive icon-driven on-screen menu. With additional features like a 10x digital zoom, screen freeze, remote mouse with laser pointer, mute and resize options the D1 and D2 really impress.

Couple this with the stylish retro design façade of polished aluminium and you have the perfect projection partner.

Projection Distance

Diagonal screen size (inches)	40	60	80	100	150
Minimum distance (metres)	1.50	2.00	2.66	3.33	5.00
Maximum distance (metres)	1.83	2.44	3.25	4.06	6.00

Connections

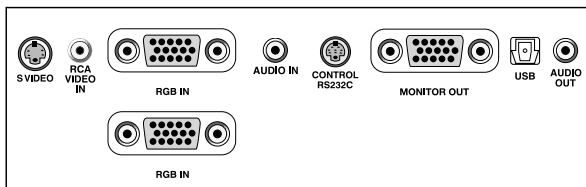

Box Contents

Operating manual & CD-ROM, RGB, RCA, Audio (x2), USB and Power cables, Remote control, Batteries, Softcase

Extra Features

More than 1000 lumens per KG
 Digital zoom (Up to 10X)
 Light Weight
 Eco Mode
 Auto-keystone set-up
 Auto-Image set-up
 Remote with laser pointer



Technical Specifications

Model		D1	D2	
Display	Display Type	DLP		
	Shape	Aspect Ratio		
		Size		
	Number of Pixels		4:3 (16:9 Switchable) 0.7" XGA panel x 1	
	Drive Method		786,432 pixels (1,024x768) DDR 12 degree (DDP-1000)	
	Contrast Ratio		2100:1	
Resolution		Real XGA		
Image	Brightness (ANSI)		2000 lm	2500 lm
	Lamp		250W TDPLD1(D1) TDPLD2 (D2)	
	Service Life of Lamp		2000h / 3000h (Eco mode)*	
	Colour Reproduction		16.7 Million Colours	
	Colour Wheel (DLP)	Segments (Qty)	RGBW 4 Segment	
		Speed	2x	
	Projection Distance (m)		1.5 - 6.0m (4.9 - 19.7ft)	
	Picture Size (Diagonal)		0.94 - 5.0m (37 - 197")	
	Projection Method		Front, Rear, or Ceiling	
	Keystone Correction	Vertical	Digital (+/-15 degrees)	
Horizontal		None		
Lens	Optical Zoom & Focus Methods		Manual Zoom & Focus	
	"F" Value Aperture		F = 2.4 - 2.6	
	"f" Value Focal Length		f = 24.19 - 30.65mm	
	Zoom Ratio		1.22 x	
	Throw Ratio		1.64 - 2.00:1	
Signal	Compatible Frequency	Horizontal (kHz)	15 - 93kHz	
		Vertical (Hz)	50 - 85Hz	
	Input Signals	Video Signal	NTSC / PAL / SECAM	
		Colour Difference	HDTV & DTV, DVD	
		RGB Real Display	VGA / SVGA / XGA	
RGB Compressed		SXGA / UXGA		
Terminals	Input	Video Signal	1x RCA, 1x S-Video	
		Computer Signal	2 x RGB	
		Audio Signal	1 x Stereo Mini Jack	
		Control & Other	RS232C (mini DIN8 pin), USB	
	Output	1 x RGB, 1 x Stereo Mini Jack		
General	Operating Noise		37dB (35dB Eco)	
	Embedded Speaker		1W Mono	
	Weight (kg)		2.4kg	
	Dimensions W x D x H		248 x 201 x 90	
	Power Source		AC100-240V, 50 / 60Hz	
	Power Consumption (W)		340W	
	Security		Kensington Slot	
	Warranty	Projector	3 Year RTB	
		Lamp	90 Days	

* Actual lamp life may vary on ambient environment

TOSHIBA

TOSHIBA INFORMATION SYSTEMS (U.K.) LTD.

Professional Visual Products Division,
 Toshiba Court, Weybridge Business Park,
 Addlestone Road, Weybridge, Surrey KT15 2UL
www.pvp.toshiba.co.uk