



Maximum Impact at Minimum Cost — Enduringly Economical!

- Low Cost of Ownership** *Reduce your operating expenses with the bSure's unique long-life lamps, which last up to three times longer!*
- Extend Lamp Life** *SmartSave™ extends valuable lamp life by automatically switching off the projector after a user-defined interval.*
- Ultra-Quiet** *Philips' innovative PAST™ system dramatically reduces fan noise to an ultra-quiet 27dB.*
- Anti-Theft Protection** *SecurityMax™ theft deterrent software and integrated Kensington lock protect your investment in any environment.*
- Easy to Use** *SmartSet™ utilizes advanced digital architecture to instantly adjust all display parameters for optimal performance and versatility.*
- Future Proof** *Featuring HDTVReady™ the bSure Series is fully compatible with future digital television standards.*
- Now Even Brighter** *Maximize your impact with the bSure Series 2 - 1500 ANSI lumens light output.*



Philips Multimedia Projectors



PHILIPS



| Model Name | bSure SV2 | bSure XG2 |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| Model Number | LC3132 | LC3142 |
| LCD | 3x 0.7" high-temperature polysilicon active matrix LCD panels | |
| Native Resolution | SVGA (800x600) | XGA (1024x768) |
| Number of pixels | 3x 480,000 | 3x 786,432 |
| Brightness | 1500 ANSI lumens | |
| Contrast | 300:1 | |
| Fan Noise | 27 dB | 29 dB |
| Lamp | 132 Watt UHP™ lamp | 150 Watt UHP™ lamp |
| Average Lifetime | 6000 hrs | 3000 hrs |
| Lens | F/1.8 - 2.2 | f = 28.4 - 34 mm |
| | Manual Focus, Manual Zoom (1.9 - 2.3 :1) | |
| | Projection Distance 59" - 468" (for image diagonal 40" - 250") | |
| Input Compatibility | | |
| Video | NTSC 3.58 / 4.43 / PAL / SECAM S-Video (Y/C) Component Video Input: YCbCr, YPbPr, RGB HDTV Compatible: (480p, 720p, 1080i) | |
| Computer | Compatible with: VGA, SVGA, XGA, SXGA, Mac/PC Horizontal Scan Rate: 15 - 108 kHz Vertical Refresh Rate: 50 - 120 Hz Bandwidth: 140 MHz | |
| Plug and Play Compatibility | Display Data Channel: DDC 1/2B Microsoft® Windows®, 95/98/ME/2000/XP compatible | |
| Input Connectors | Component Video (R/Pri/Cr, G/Y, B/Pb/Cb: 3x RCA) | |
| Video | 1x Composite Video (RCA) 1x S-Video (Y/C: mini-DIN) | |
| Computer | 1x RGB Data (D15-pin) | |
| Audio | | |
| Video | Stereo Audio (2x RCA) | |
| Data | 1x Stereo Audio (3.5 mm stereo jack) | |
| Speaker | 6 Watts | |
| Mouse Control | USB (type A), PS/2 (mini-DIN) | |
| Features | SecurityMax™ Theft protection SmartSet™ automatic image quality optimization SmartSave™ auto-standby mode helps extend lamp life ColorTracking™ provides superior colorimetry for Video display Digital Zoom and Digital Freeze Digital Keystone correction with FitScreen optimization Connect an external computer monitor using supplied Y-Cable | |
| Physical Specifications | | |
| Product Dimensions (HxWxD) | 4.25" x 9.25" x 13.2" (108 x 235 x 335 mm) | |
| Product Weight | 8.1 lbs / 3.7 kg | |
| Power consumption | | |
| Operating Voltage | 100 - 240 VAC, 50/60 Hz | |
| Operation / Standby | 170 Watts / 5 Watts 210 Watts / 5 Watts | |
| Temperature Range | | |
| Operational | +41 to +95 °F (+5 to +35 °C) | |
| Storage | -13 to +158 °F (-25 to +70 °C) | |
| FCC Rating | Class B | |
| Included Accessories | Compact Remote Control, Power Cord, Lens Cap Combined VGA-USB Cable (79" / 1.5m), Audio/Video cable (79" / 2m) Scart to RCA Adapter (audio/video), D15-pin Y-Cable CD-ROM User Guide (UK, D, F, E, PT, NL I) Quick Setup Card (UK, D, F, E, PT, NL, I) Warranty Card | |
| Optional Accessories | 132W Replacement Lamp for LC3132 (LC3116) 150W Replacement Lamp for LC3142 (LC3118) Soft Carrying Bag (LCA1120) Ceiling Mount (LCA2211) VGA Extension Cable, 49 feet / 15 meters (LCA5300) | |
| Model Number | LC3132 | LC3142 |

Key Features


- UHP™ Long-life Lamp (up to 6,000 hours)
- Low Cost of Ownership
- Ultra-Quiet only 27dB
- SecurityMax™ Theft Protection

Projection Chart

| Image Diagonal size | | Projection Distance | | | |
|---------------------|----------|---------------------|----------|-----------|----------|
| | | Tele zoom | | Wide zoom | |
| [inch] | [meters] | [inch] | [meters] | [inch] | [meters] |
| 40 | 1.0 | 74 | 1.9 | 59 | 1.5 |
| 60 | 1.5 | 112 | 2.8 | 91 | 2.3 |
| 70 | 1.8 | 130 | 3.3 | 106 | 2.7 |
| 80 | 2.0 | 150 | 3.8 | 121 | 3.1 |
| 100 | 2.5 | 187 | 4.7 | 152 | 3.9 |
| 150 | 3.8 | 280 | 7.1 | 228 | 5.8 |
| 200 | 5.1 | 374 | 9.5 | 304 | 7.7 |
| 250 | 6.4 | 468 | 11.9 | 380 | 9.7 |

All values are estimates

Input Panel

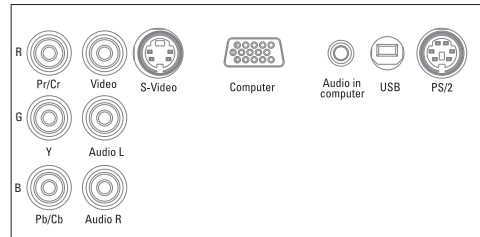

Hassle-Free Service and Support

Philips' First Choice Warranty assures you that you'll always be ready to present even in case of equipment failure thanks to our toll-free technical support (1 year), 48-hour Roadside Assistance Program and 3-year Parts and Labor Warranty** (excluding lamp).

INTERNET ADDRESS: <http://www.philipsusa.com>
 TECHNICAL SUPPORT: Toll Free 1-888-873-4672
 SALES INFORMATION: Toll Free 1-888-327-3636

Philips Consumer Electronics
 64 Perimeter Center East
 Atlanta, Georgia 30346

Design and specifications are subject to change without notice. Printed in the U.S.A., ©2003 Philips Consumer Electronics Co., A Division of Philips Electronics North America Corp.

* Available in the USA and Western Europe. Check with your dealer for similar coverage in other regions.

**Warranty is for 3 years or 2500 hours, whichever comes first. Time kept by internal clock.

All trademarks are property of their respective owners.

CCM-150-2_3/03

Literature Order Number: bSure Series 2

