

2000 ANSI LUMENS

XGA RESOLUTION

HDTV COMPATIBLE



B O X L I G H T

CP-322i

A truly versatile conference room projector, the Boxlight CP-322i offers **2000 ANSI LUMENS, XGA RESOLUTION, PICTURE IN PICTURE, HORIZONTAL AND VERTICAL KEYSTONE CORRECTION**, and a user start-up screen function. At 6 pounds, this unit can easily be moved from room to room. **HDTV COMPATIBILITY AND SXGA COMPRESSION** makes this unit future-ready and friendly with most computers including workstations. **MULTIPLE INPUTS, DIGITAL ZOOM IMAGING, INCLUDED REMOTE AND ZOOM LENS** round out the long list of features making this the perfect projector for fixed installations and medium to large venues. Call the digital projector specialists at BOXLIGHT today!

19332 Powder Hill Place

Poulsbo, WA 98370

800.762.5757

360.779.7901

www.boxlight.com


 **BOXLIGHT**[®]
Presenting a Better Way

BOXLIGHT and the BOXLIGHT logo are registered trademarks of BOXLIGHT Corporation. © 2003 BOXLIGHT Corporation. All other marks are the property of their respective owners. Specifications are subject to change without notice. CP322i - 11/03

B O X L I G H T

CP-322i

p r o j e c t o r

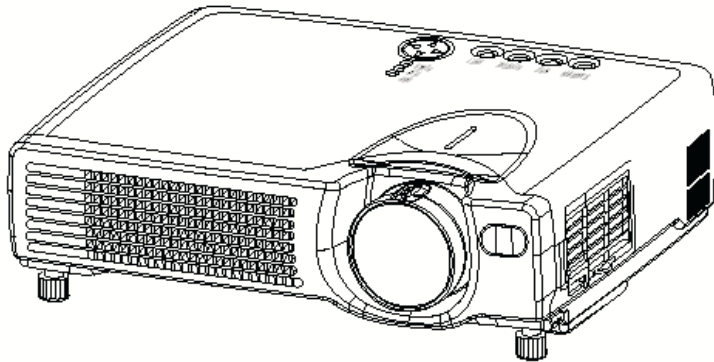

- 2000 ANSI Lumens, 1600 in whisper mode.
- True XGA resolution with compression up to SXGA. HDTV compatibility.
- Digital Keystone adjustment on remote.
- Digital Zoom imaging.
- Multiple inputs.
- User-definable start-up screen.
- Portable at only 6 pounds.
- Good for small to large venue presentations.
- All BOXLIGHT projectors feature the latest in technology and design.
- Lifetime 24/7 technical support.
- The fastest response time in the industry from our state-of-the-art service center.

BOXLIGHT®
Presenting a Better Way

To contact BOXLIGHT

Direct	800.762.5757
Rental	800.736.6954
Education	800.689.6676
Government	800.497.4009
International	360.779.7901
Toll Free Fax	888.353.4242
Internet	www.boxlight.com



Resolution:	1024 x 768 true XGA, with compression up to 1280 X 1024 SXGA	Projection Lens:	Manual zoom and focus, F1.7 - 2.1; f= 36.8 - 47.8mm; zoom ratio 1:12
Brightness:	2000 ANSI lumens	Diagonal Image Size:	3'- 36" / 76 - 760cm
Lamp:	150 watt UHB	Throw Distance:	3'- 36" / 0.9 - 11m
Display Type:	(3) 0.7" TFT polysilicon LCDs	Keystone:	Digital adjustment: Vertical +/-15°, Horizontal +/-15°
Contrast Ratio:	350:1	Adjustments:	On-board and remote
Colors:	16.7 million	Power Supply:	100-240V at 50/60Hz
Aspect Ratio:	4:3, 16:9 compatible	Power Consumption:	240 watts
Inputs:	COMPUTER: (2) 15 pin; VIDEO: (1) Composite (RCA), (1) S-Video; (1) Component; AUDIO: (1) RCA	Compatibility:	SXGA, XGA, SVGA, VGA, Mac
Outputs:	COMPUTER: (1) Computer 15-pin; CONTROL PORT: (1) for RS-232 control and mouse operation, (1) USB for mouse operation	Weight:	6 lbs. / 2.7 kg
Audible Noise:	38dB / 36dB in whisper mode	Dimensions:	(H x W x D) 3" x 11.6" x 9" / 8.8cm x 29.5cm x 23.7cm
Audio:	(1) Built-in 1-watt speakers	FCC Rating:	Class B Certification
Video:	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM	Warranty:	Two-year parts and labor (120-day or 500-hours lamp warranty)
HDTV/EDTV:	1080i, 1035i, 720p, 575p, 575i, 480p, 480i compatibility	Accessories Included:	Remote control with built-in laser pointer, VGA cable, Component Video cable, PS/2 mouse cable, Soft carry case
Scan Frequency:	31-80kHz	Optional Accessories:	One year extended warranty, ceiling mount plate, ceiling mount suspension pole, ceiling round flush mount kit, soft carry case. hard carry case. ATA case, serial mouse cable, MAC mouse cable, RS-232 control cable, USB mouse cable
Vertical Refresh Rate:	56-120Hz		