




ImagePro 8802 Portable Powerful LCD Projector

- 2000 lumen brightness
- XGA resolution
- Easy to transport, only 6 lbs.
- Full set of features, 5 inputs
- Monitor loopthrough

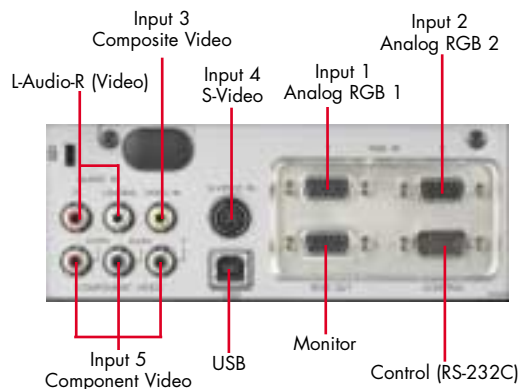

8802 DUKANE


ImagePro 8802

Premium-quality LCD projector

A new way of thinking about projection

The Dukane ImagePro 8802 is a projector that can be easily moved around while still providing higher image brightness and features to make your class or presentation easy. It is simple to use, transport, and can be setup in a minute.

This full-featured LCD projector is ideal for classrooms, conference rooms or other locations where a bright image is required. Use it as a portable or mount it on the ceiling.



Key features:

- True XGA (1024 x 768) resolution
- 2000 ANSI Lumens of brightness
- Vibrant rich colored images
- Easy carry 6 lbs.
- Flexibility with 2 computer and 3 video inputs
- Full function remote with mouse/cursor control
- Custom Image for your startup and blank screens
- Wide angle zoom lens permits closer placement to the screen
- "Silent Running" so you hear only your message
- Vertical and horizontal keystone correction
- Five Year Warranty and Peace of Mind Service

8802 Projection Table

*Screen Size 4.3		*Throw Distance	
Diagonal	Width	Min	Max
40	32	47	55
60	48	71	87
80	64	95	114
100	80	118	142
120	96	142	173
150	120	181	217
200	160	240	287

Throw ratio 1.47-1.79:1 (distance:width)

*All measurements in inches.

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485 or 2486 toll-free
630-584-5156 fax
avsales@dukcorp.com e-mail
www.dukcorp/av.com



ImagePro is a registered trademark of Dukane Corporation
#11634-D-04

Specifications

LCD Type	0.7" polysilicon active-matrix TFT x3
Brightness	2000 ANSI lumens (1600 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V)
Contrast	400:1
Scanning Frequency	fh 15-80 kHz, fv 50-120 Hz
Lens	Manual zoom (f1.7 - 1.9), 1.2X
Lens Throw Ratio	1:1.5 - 1.8:1 throw distance to image width
Keystone Correction	Digital, vertical & horizontal
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA/Compressed PC and Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, M-PAL, N-PAL, PAL60, SECAM, S-video
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	150W UHP
Lamp Life	2000 hours (typical) 4000 hours (whisper mode)
Audio	1 speaker, 1 watt
Throw Distance	47" to 233"
Screen Size	40" to 200"
Inputs, Video	(1) Min DIN 4-pin, s-video (1) Component, RCA x 3 (1) RCA, composite video (1) Audio, Stereo, RCA x 2
Inputs, Computer	(2) Signal: D-sub, 15 pin
Output, Audio	(1) Stereo, mini jack
Outputs Monitor	(1) 15 pin, D-sub
Outputs, Control	(1) 15 pin, D-sub, RS-232 (1) USB Mouse control
Security	Kensington lock slot
Fan Level	38dB, ultra quiet 33dB in Whisper Mode
Power	AC 90-132V, AC220-240V 50/60 Hz, 240 watt
Size (WxHxD)	11.6" x 3" x 9.1"
Weight	6 lbs.
Shipping Weight	15 lbs.
Carton Size	16" x 14" x 12"
Accessories Included	Remote control, batteries, power cord, Video cable, Audio cable, RGB cable, and operators manual. soft carry case.
Safety	UL/CUL, FCC Class B
Optional Accessories	Lamp 456-233; rolling briefcase; 185-406 Ceiling mount, universal: PJF-UNV-S

Five (5) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply).
Includes Dukane's FREE 12 month
Peace-of-Mind Loaner Program.

5YR