

D315M

Luxeon DLP Micro-Portable Digital Projector

- DLP Technology Providing Vivid Image
- Feather Weight, only 3.5lbs, easy to carry
- Superior Contrast Ratio - 1000:1
- Native 1024 x 768 XGA Resolution
- HDTV Compatible(1080i, 720p, 480i/p)
- Various Input Source Receivable, Notebook, S-Video, DVD player, HDTV/Component Video, USB mouse through PC
- Wide Angle, Throw Ratio at 1.5 to 1.8



D315M



Enjoy the impact of feather-weight and vivid presentations anywhere with the Luxeon D315M, a DLP(TM) enhanced mobile projector. Powered with theater-quality 1000:1 contrast ratio and True XGA (1024x768) hi-resolution, it delivers unbelievable vibrant colors & super sharp images. The D315M's 1500 ANSI lumens brightness and professional wide-angle lens enables a massive screen to be projected from just 1.5m or from as far as 10m. Compact and extremely portable at only 3.5 lbs, the Luxeon D315M is the IDEAL projector for business road-warriors and other high-mobility applications.



Input/Output Terminals




Adjustable Zoom and Focus Ring



SPECIFICATIONS Projection Distance 4.9 ft. ~ 32.8 ft. (1.5m ~10.0m)

Display Technology	0.7" 12"DDR DLP	
Resolution	XGA 1024 x 768(native) , SXGA 1280x1024 (compressed)	
Color Reproduction	24 bit, 16.7million True Color	
Contrast Ratio	1000:1	
Brightness (ANSI Lumens)	1500	
Lamp (Life)	150W	
Uniformity	80%	
Projection Distance:	5ft. - 33ft. (1.5m-10 m)	
Projection screening size	40in. to 311in.(0.98m-7.83m)	
Digital Keystone Correction	Horizontal	NA
	Vertical	+/- 15°X
Lens	Manual zoom(1:1.2) and manual focus; F2.4	
Throw Ratio (D/W)	1.50 - 1.80	
Aspect Ratio	4:3 & 16:9	
Compatibility	Data	VESA 1280x1024@75/60 Hz VESA 1024x768@85/75/70/60 Hz VESA 800x600@85/75/72/60/56 Hz VESA 640x480@85/75/72/60 Hz IBM PC or Compatible (VGA, SVGA, XGA), Macintosh, Power Mac and more
	Video	NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM, HDTV(480i, 480p, 720p, 1080i) Composite & S-Video & YCbCr & YPbPr
Timing Range	VGA H-Sync	15, 31~90KHz
	VGA V-Sync	43 - 85Hz
Input/Output Terminals	RGB in	DVI connector x 1
	S-Video in	Mini DIN 4-pin x 1
	Video in	RCA jack x1
	Audio in	Mini jack x 1
	USB out	Type B receptacle x1
Sound Output	0.5W mono speaker	
Power Supply	100 ~240vac, 47-63 Hz; with PFC	
Power Consumption	210W	
Fan Noise Level	35 dB	
Safety & Regulatory Compliance	FCC-B, UL, C-UL, CE/TUV.CB, CCC	
Security Lock	Kensington lock	
Weight	3.5 lbs	
Dimension (LxWxH)	188mm x 240mm x 64 mm	
Remote Control	Built in Lazer Pointer and Mouse Function	
Supplied Accessories	Power Cord (US/China, black); Remote Control w/2AA batteries Carrying Case; User Manual; Lens cap; Quick Start Guide; DVI to RGB cable(1.8M); S-video cable; Stereo mini-jack cable; USB cable for mouse, Audio cable	
Optional Accessories	RCA audio/stereo mini-jack cable (Video); Mac adapter; Composite video cable; Component Y/Cr/Cb cable; Replacement Lamp unit; Ceiling mount kit	
Warranty	2 years	

*Specification subject to change without prior notice.

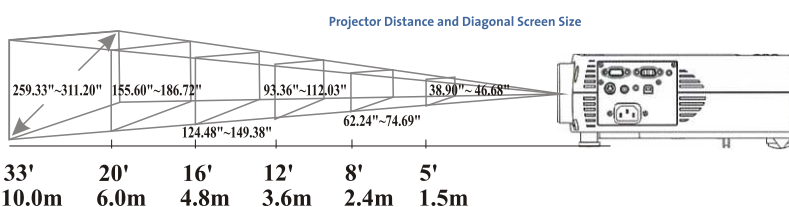

Wintory Co.,Ltd
6/330-1 Bangna-Trad Rd.,
Dokmai, Pravet, Bangkok 10250 Thailand
Tel (66)0-2316-9365(Auto) Fax (66)0-2316-9364
Website: <http://www.wintory.com> E-mail: info@wintory.com