

UltraLight™ DS1

fits in a briefcase, fills up a room

TAKE IT ANYWHERE

under 10 pounds and a compact design make it the essential travel companion

PUT IT ANYWHERE

a zoom lens lets you set it up anywhere in a room

REMARKABLY BRIGHT

present big, bright images no matter where you go

MAKE AN IMPACT

vivid colors and razor-sharp clarity leave a lasting impression

SACRIFICE NOTHING

it's compact without compromising on features or reliability



actual size: 9.2 in (W) x 12.8 in (L) x 4.7 in (H)

ULTRALIGHT DS1

When you know you won't get a second chance to make a good impression, Proxima's UltraLight DS1 projector is the way to present. You can count on the remarkably bright UltraLight DS1 to make a big impact anywhere, anytime. It's surprisingly compact without sacrificing any features, like a zoom lens that lets you set up your presentation nearly anywhere in the room. The UltraLight DS1 is so versatile, all you'll worry about at your next presentation is showing up on time.

- 600 lumens of brightness enables lights-on presentations
- lightweight, compact and durable design makes it the one to travel with
- SVGA (800 x 600) resolution and XGA (1024 x 768) to VGA (640 x 480) compatibility supports full-screen images from any notebook
- AccuBlend™ intelligent pixel blending provides seamless support for VGA through XGA images and magnification up to 400%
- convenient carry handle makes it easy to tote from office to office
- features Digital Light Processing™ by Texas Instruments for photo-realistic image quality

PROXIMA®
MULTIMEDIA PRO PRESENTATION


DLP
A TEXAS INSTRUMENTS TECHNOLOGY



UltraLight DS1

UltraLight DS1 Set Up

Position the UltraLight DS1 anywhere in the room.

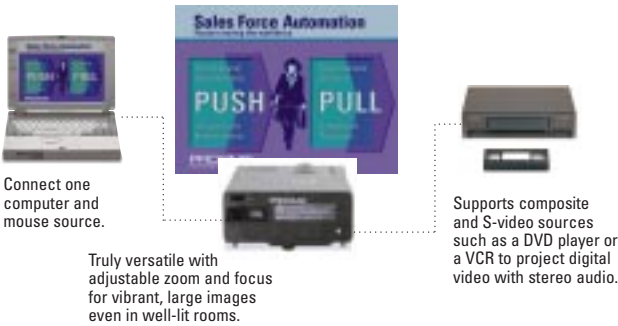

Truly versatile with adjustable zoom and focus for vibrant, large images even in well-lit rooms.

Projection Distances/Image Sizes

Projection Distance	Image Size (Diagonal)				
	Minimum		Maximum		
4'	1.2 m	1.9'	0.6 m	2.5'	0.8 m
5'	1.5 m	2.4'	0.7 m	3.2'	1.0 m
6'	1.8 m	2.9'	0.9 m	3.8'	1.2 m
7'	2.1 m	3.4'	1.0 m	4.4'	1.3 m
8'	2.4 m	3.8'	1.2 m	5.0'	1.5 m
10'	3.0 m	4.8'	1.5 m	6.3'	1.9 m
15'	4.6 m	7.2'	2.2 m	9.5'	2.9 m
20'	6.1 m	9.6'	2.9 m	12.6'	3.8 m
25'	7.6 m	12.0'	3.7 m	15.8'	4.8 m
39'	12.0 m	19.6'	6.0 m	25.0'	7.6 m

WHAT'S INCLUDED

UltraLight DS1 includes:

- Remote control
- Remote mouse receiver with 2 adaptors - (PS/2 and Mac), power cords 9.8 ft (3 m)
- PC video cables, AV cable, Mac video adaptor (PC to Mac)
- Soft carrying case, lens cap
- Product documentation

ORDERING INFORMATION

Model Number

DS1

For worldwide use

Optional Accessories

A311	Carry-on rolling soft case
A312	Carry-on rolling hard case (checkable/shippable)
A58 ¹	AC/DC wireless speaker systems
A640	40" portable tabletop screen
A650	50" portable tabletop screen

TECHNICAL SPECIFICATIONS

Computer Compatibility	<ul style="list-style-type: none"> IBM PC, PS/2, Pentium and Compatibles Apple Macintosh, Power Macintosh, and PowerBook families
Video Compatibility	<ul style="list-style-type: none"> NTSC, PAL, SECAM, NTSC 4.43
Input Sources	<ul style="list-style-type: none"> 1 computer 1 video 1 S-video 2 audio
H-Sync Range	<ul style="list-style-type: none"> 15-60 kHz
V-Sync Range	<ul style="list-style-type: none"> 50-85 Hz
Brightness	<ul style="list-style-type: none"> 600 ANSI lumens peak
Contrast Ratio	<ul style="list-style-type: none"> 200:1 ANSI; 250:1 full-on, full-off
Display Technology	<ul style="list-style-type: none"> Single-chip Digital Light Processing (DLP™)
Resolution	<ul style="list-style-type: none"> SVGA (800 x 600)
Resolutions Supported	<ul style="list-style-type: none"> VGA (640 x 480, AccuBlend™), SVGA (800 x 600), XGA (1024 x 768, AccuBlend)
Keystone Correction	<ul style="list-style-type: none"> 11.7 - 15.0 degrees
Number of Colors	<ul style="list-style-type: none"> 16.7 million
Image Size (Diagonal)	<ul style="list-style-type: none"> 2 ft (0.6 m) to 25 ft (7.6 m)
Lens	<ul style="list-style-type: none"> Manual zoom lens 1.3:1 ratio; Focal Length 2.75 mm -35.75 mm, f/3.0
Projection Distance (From Screen)	<ul style="list-style-type: none"> 4 ft (1.2 m) to 39 ft (12 m)
Lamp	<ul style="list-style-type: none"> 270 watt metal halide Lamp life: 1000 hours
Audio	<ul style="list-style-type: none"> 2-watt monaural speaker
Remote Control	<ul style="list-style-type: none"> Included with projector
Approvals	<ul style="list-style-type: none"> FCC Class A, UL, C-UL, CE
Power Consumption	<ul style="list-style-type: none"> 380 watts
Power Requirements	<ul style="list-style-type: none"> Auto switching 100-120 VAC, 220-240 VAC at 50/60 Hz
Operating Temperature (Sea Level)	<ul style="list-style-type: none"> 41-95°F (5-35°C)
Weight	<ul style="list-style-type: none"> 9.9 lb (4.5 kg)
Dimensions	<ul style="list-style-type: none"> 9.2 in. (W) x 12.8 in. (L) x 4.7 in. (H) 23.4 cm (W) x 32.5 cm (L) x 12.0 cm (H)
Projection Method	<ul style="list-style-type: none"> front/rear, desktop/ceiling
On-screen Menu Languages	<ul style="list-style-type: none"> English, Japanese, German, French, Italian, Spanish, Swedish
Audible Noise	<ul style="list-style-type: none"> < 46db
Warranty	<ul style="list-style-type: none"> One year on parts and labor (excluding lamp)

PROXIMA®

Main Office: 9440 Carroll Park Drive, San Diego, CA 92121-2298, (619) 457-5500, FAX (619) 457-9647, (800) 447-7692 (U.S. and Canada)

Latin American Office: 3191 Coral Way, Suite 636, Miami, FL, 33145-3213, (305) 445-6445, FAX (305) 445-6435

European Office: St. Thomas House, 28-32 Spittal Street, Marlow, Bucks. SL7 1DB. U.K., +44 (0) 1628 481555, FAX +44 (0) 1628 487744

www.proxima.com

www.presentersuniversity.com

1 Wireless speakers are not available in certain markets.

Proxima and Fit-to-View are registered trademarks of Proxima Corporation. UltraLight is a trademark of Proxima Corporation. Other trademarks are the property of their respective owners. ©1998 Proxima Corporation. All rights reserved. Specifications are subject to change without notice. Lumen and lamp life may vary depending on lamp manufacturer.

8/98 709-00569-3

