



A1000 SERIES



Key Features with Strong Performance.

For businesspeople purchasing a new digital projector, the ASK Proxima A1000 projector series provides key features and strong performance at an affordable price.

ASK Proxima A1000 series DLP® Projectors with BrilliantColor™ technology elevate color fidelity and performance, eliminating such optical tradeoffs. This projector series combines a 5 segment color wheel with 2500 lumens and a 2000:1 contrast ratio. The A1000 series features advanced connectivity options such as: multiple computer and audio inputs; a wireless-ready port for easy upgrades to InFocus LiteShow II; and an RS-232 port for integration with meeting room control systems.

The New First Impression

The A1000 series is built for outstanding longevity with DLP® technology. This promises a lower total-cost-of-ownership, longer life and improved reliability than other display technologies, such as LCD. These projectors are dust-free, having eliminated fan filters and lamp screen maintenance the A1000 series is rated for 24x7 operation. The lamp lasts up to 3000 hours and when necessary can be quickly changed without removing an installed projector from the ceiling, saving time and maintenance expense.

Just the Facts

2500 Lumens	bright images in high ambient light environments
Connectivity	(2) computer in, (2) audio in, RS232 and Wireless-Ready port
Lamp life	2500 norm, 3000 eco offers a lower operating cost
BrilliantColor™ Technology	brighter, more realistic colors
DLP® Technology	superior reliability and lower total cost of ownership
Resolution	SVGA, XGA or WXGA models to fit your technology needs
Warranty	standard 2 year projector, 6 month lamp warranty
Remote	newly designed, easy to use remote with more functions
Security	Kensington lock and PIN code feature



The A1000 series is available in three resolutions:

- Good - SVGA (800x600); for older PCs & DVD players
- Better - XGA (1024x768); the current industry standard
- Best - WXGA (1280x800); perfect for newer widescreen notebooks


TECHNICAL SPECIFICATIONS*

Native Resolution**	A1100: SVGA A1200: XGA A1300: WXGA
Display Technology	Texas Instruments DLP® Technology .55" LVDS DDP2230 /w BrilliantColor™
Brightness	2500 lm normal, 1800 lm eco
Contrast Ratio	2000:1
Input Sources	(2) D-sub HD15, S-Video, Composite Video, USB, (2) Audio-in, RS232
Output Sources	Monitor Loop-thru (HD15), Audio out, DC output : 5V 2A
Max Resolution**	A1100 : XGA A1200 : SXGA A1300 : WXGA+
Supported Aspect Ratio	A1100, A1200 4:3 (default); 5:4, 16:9, 16:10 A1300 16:10 (default); 4:3, 5:4, 16:9
Video Compatibility	NTSC/NTSC4.43/PAL/PAL-M/PAL-N/SECAM and SDTV(480i/576i), EDTV(480p/576p), HDTV(720p/1080i)
Number of Colors	16.7 Million, True color
Color Wheel	5 segment (RGBYW)
H-Synch Range	31 ~ 79 KHz
V-Synch Range	50 ~ 85 Hz
Keystone Correction	+/- 20 deg. (Vertical)
Min Image Size (width)	0.61 m
Max Image Size (width)	6.09 m
Zoom Ratio	1.1 : 1
Throw Ratio (distance/image width)	1.97 - 2.16 (Distance/Width)
Projection Distance	1.2 - 10 m
Image Offset	115%
Projection Methods	Front, Rear, Ceiling-Front, Ceiling-Rear
Audio	2W speaker
Control	RS232, USB
Lamp	200W normal, 170W eco
Product Dimensions	Height: 4.3" (105mm) Length: 9.5" (240mm) Width: 11.7" (296mm)
Product Weight	6.9 lbs (3.1kg)
Product Color	Black and Silver
Shipping Weight	11.6lbs (5.8kg)
Shipping Dimensions	Height: 9.4" (239mm) Length: 13" (330mm) Width: 16.5" (427mm)
Power Consumption	250 Watts normal, 220 Watts eco
Power Supply	100~240Vac, 50/60Hz
Operating Temperature	5 - 35° C
Max Altitude	10,000 ft
Ships with (HW accessory only)	Power cord, USB(AB), VGA cable, Carry Case, Remote w/ batteries
Menu Languages	English/ Français/ Deutsch/ Italiano / Korean / Norwegian/ Portugûes / Russian / Simplified Chinese / Spanish / Traditional Chinese / Swedish / Dutch / Polish / Turkish / Danish / Finnish
Lamp Life	2500 hours normal, 3000 hours eco***
Audible Noise	35dB normal, 32dB eco
Projector Warranty	2 years, (24x7 operation compatible)
Lamp Warranty	6 months
Accessories Warranty	90 days
Approvals	C-Tick mark (Australia) NOM certification (Mexico), CE (Europe), UL & CUL (USA and Canada), FCC (USA), IRAM (Argentina), GOST (Russia), MIC & eK (South Korea), CCC (China), PSB (Singapore)
Security	Kensington® slot, Pin code

* Product specifications, terms, and offerings are subject to change at any time without notice.

** Resolution support may be product specific.

*** Actual lamp life may vary based on the ambient environment and projector usage. Conditions that may affect lamp life include temperature, altitude, and rapidly switching the projector on and off.

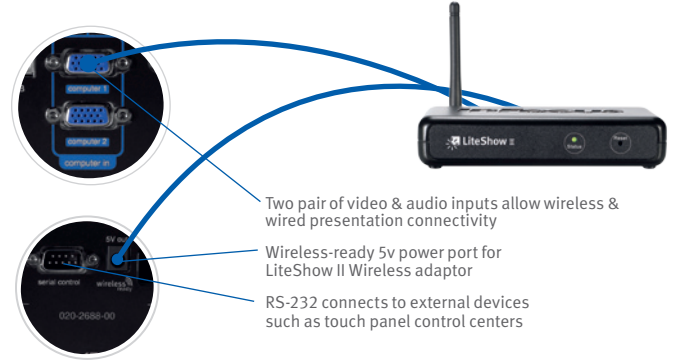

LiteShow II

This wireless adaptor from InFocus Corporation enables cable-free presentations through any of the ASK Proxima A1000 projector series. Switch presenters in seconds and transmit data, audio and stunning video over a 300' (95m) range.

Warranty

Providing the highest quality products and support is very important to ASK Proxima. Just one reason why the A1100, A1200 & A1300 digital projectors come standard with a 2-year limited factory warranty (including parts and labor) and a 6-month limited lamp-replacement warranty. Extended product & lamp warranty programs are also available. For more information about warranty and service programs in your region, please visit: www.infocus.com/service

Optional Accessories

- Projection Screens (4:3, 16:10 & 16:9)
- Cables & Adaptors
- LiteShow II Wireless Adaptor
- Advanced Remote Control (HW-COMMANDER)
- Briefcase and Rollercase
- Ceiling Mount (SP-CEIL-UNIV)
- Security Locks (SEC-LOCK-01)
- Replacement Lamp (SP-LAMP-039)

ASK Proxima

www.askproxima.com

InFocus Corporate Headquarters: 27500 SW Parkway Avenue
Wilsonville, Oregon 97070-9215, USA • Phone: (1) 503-685-8888
(1) 800-294-6400 • Fax: (1) 503-685-8887

In Europe: InFocus International BV • Louis Armstrongweg 110 • 1311 RL Almere
The Netherlands • Phone: (31) 20 5792000 • Fax: (31) 36 5392999
Telephone: 008000 4636287 (008000 INFOCUS)

In Asia: 19 Tanglin Road • 7th Floor
Singapore 247909 • Telephone: (65) 6334-9005 • Fax: (65) 6333-4525