

BenQ Digital Projector

SP920




BrilliantColor™

Highlights

- Extremely High Brightness
6000 ANSI Lumens
- High Contrast Ratio 2000:1
- Dual lamp(3 sets of lamp mode)
- BrilliantColor™
- UNISHAPE™
- HDMI (v1.3)
- Presentation Timer
- Panel Key Lock
- Wall Color Correction
- 3D Color Management
- Power On/Off Tone
- Golden Ratio Color Wheel
- “Q?” Hot Key for FAQ
- Quick Auto Search
- 11 Sets of Picture Mode
- Power saving ”Auto Off”
- Security Password
- My Screen
- High Altitude Mode
- HDCP Compatible
- 12V Trigger
- Lamp Care

BenQ | Multi-function Connectors

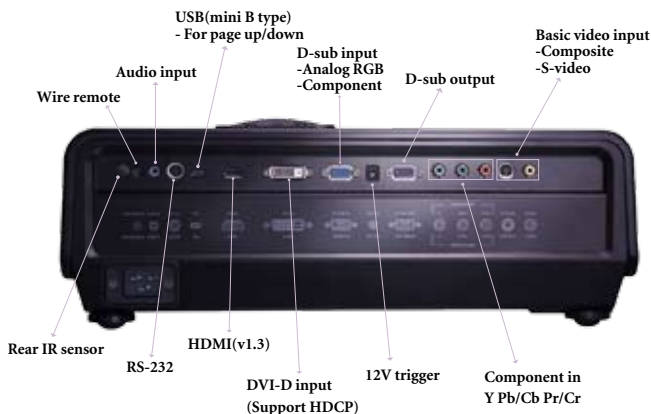

Specifications

Projection System	DLP® technology by Texas Instruments®			
Native Resolution	XGA (1024 x 768)			
Brightness	6000 ANSI lumens			
Contrast Ratio	2000:1 (Full on/Full off)			
Aspect Ratio	4:3 Native, 16:9 Selectable			
Color	Full 16.7 million color palette			
Lens	F=2.4~2.7, f=38.87~46.63mm			
Zoom Ratio	Manual Zoom, 1.15:1			
Image Size (Diagonal)	31" to 300"			
Throw Ratio	60"@2M (60"@6.6 feet)			
Lamp	280W x2, 2000/3000 hours (Normal/Economic mode)			
Computer Compatibility	VGA(640 x 480) to UXGA(1600 x 1200)			
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p			
Video Compatibility	NTSC, PAL, SECAM			
Horizontal Frequency	31-82 kHz			
Vertical Scan Rate	48-85 Hz			
Input Terminals	PC	Analog RGB: D-sub 15 pin x 1		
	A/V	HDMI(v1.3): x1		
		Component Video: RCA x 3		
Audio	S-Video: Mini Din 4 pin x 1			
	Composite Video: RCA x 1			
	DVI-D(support HDCP) x 1			
Output Terminal	PC	12V Trigger D-sub (15 pin) X 1		
	Audio	5 Watt Speaker x 2		
Control Terminal	Serial Connector : RS232 8 pin MINI DIN			
	USB Connector : USB x 1 (Type mini B)			
	Wired Remote jack x 1			
Dimensions(W x H x D)	443 x 167 x 355 mm (17.4 x 6.6 x 14 inch)			
Weight	11 kg (24 lbs)			
Power Supply	100 to 240 VAC, 50 to 60 Hz			
Power Consumption	Max. 805W, Eco. Mode 705W			
Audible Noise	37/34 dB (Normal/Eco)			
On-Screen Display Languages	English/ French/ German/ Italian/ Spanish/ Russian/			
	Traditional Chinese/ Simplified Chinese/Japanese/ Korean/ Swedish/ Dutch/ Turkish/ Czech/ Portuguese / Thai/ Polish			
Picture Modes	PC Input:	A/V Input:		
	Dynamic Mode	Presentation Mode	Dynamic Mode	Standard Mode
	sRGB Mode	Cinema Mode	Cinema Mode	User 1 Mode
User 1 Mode	User 2 Mode	User 2 Mode	User 1 Mode	
Function	Dual lamp	Wall Color Correction		
	(3 sets of lamp mode)	Brilliant Color		
	3D Color Management	UNISHAPE		
	Quick Auto Search	Blank (ECO mode)		
	Sleep Timer	Quick Cooling		
	Presentation Timer	Auto Off		
	Power On/Off Tone	Security Password		
	Panel Key Lock	My Screen		
	Resolution Reminder	HDMI(v1.3)		
	11 sets of Picture Mode	HDCP Compatible		
	"Q?" Hot Key for FAQ	HDTV Compatible		
	Freeze	12V Trigger		
	Lamp Care	High Altitude Mode		
Accessories (Standard)	User's Manual		Remote control	
	Quick Start Guide		Batteries for R/C	
	Manual CD		VGA cable	
Accessories (Optional)	Ceiling Mounting Kit		Spare Lamp Kit	
	Presentation Plus		RS232 Cable	