


Made for even brighter ideas.



- 2,500 ANSI-lumens
- Contrast 2,000:1
- BrilliantColor™




DLP™ and the DLP logo are registered trademarks of Texas Instruments and BrilliantColor™ is a trademark of Texas Instruments

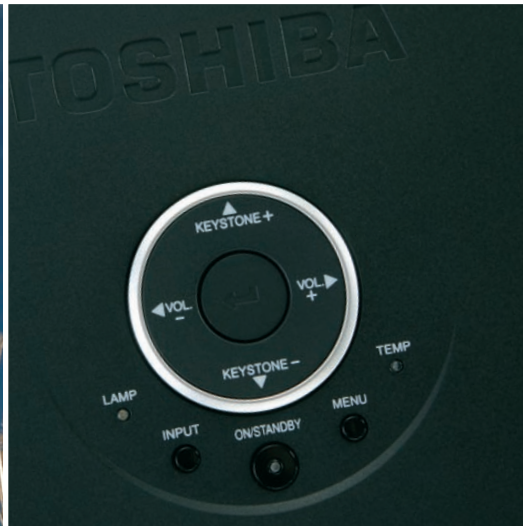

|                             |  |
|-----------------------------|--|
| Display                     | 0.55" DMD™ Chip  |
| Resolution                  | XGA 1.024 x 758  |
| Brightness                  | 2,500 ANSI-lumens  |
| Colour reproduction         | 16.7 million colours   |
| Contrast                    | 2,000:1  |
| Projection format           | 4 : 3 switchable to 16 : 9   |
| Lamp                        | 200 W (TLPLV10LAMP)  |
| Max. lamp life              | up to max. 3,000 hours/<br>up to max. 4,000 hours in ECO mode                                  |
| Lens                        | F = 2.4 - 2.6 / f = 21.8 - 23.8 mm,<br>manual focus and zoom                                   |
| Zoom                        | 1.1 x  |
| Frequency (hor./vert.)      | 31 - 69 kHz/56 - 85 Hz   |
| Projection                  | front, rear and ceiling  |
| Digital keystone correction | manual vertical  |
| Picture size (diagonal)     | 0.6 - 7.7 m  |
| Projection offset           | 130 %  |
| Input signals               | NTSC / PAL / SECAM, 480i, 480p, 576i,<br>576p, 720p, 1,080i, VGA, SVGA, XGA,<br>SXGA (compr.)  |
| Inputs                      | 1 x RGB (D-sub 15), 1 x S-video, compo-<br>site video (RCA), 1 x RGB audio stereo<br>mini jack |
| Outputs                     | RGB, audio   |

|                        |   |
|------------------------|---|
| Serial interface       | RS-232C (D-sub 9pin)  |
| Power supply           | AC 100 - 240 V, 50 / 60 Hz  |
| Loudspeaker            | 2 W Mono  |
| Dimensions (W x H x D) | 270 x 189 x 87 mm   |
| Weight                 | 2.2 kg  |
| Operation noise        | ECO mode 30 dB / normal 34 dB   |
| Specials               | BrilliantColor™, auto setup,<br>keystone correction, RJ45 via adapter<br>remote control with batteries, owners<br>manual, RGB- and power cable, softcase<br>ceiling mount, spare lamp,<br>RJ45 control adapter, camera c001           |
| Accessories            |   |
| Options                |   |
| Menu guidance          | 21 languages: English, French, German,<br>Italian, Spanish, Portuguese, Russian,<br>Swedish, Turkish, Polish, Danish, Czech,<br>Hungarian, Dutch, Finnish, Norwegian,<br>Romanian, Indonesian, Greek,<br>Chinese (simple/traditional) |

|                        |   |
|------------------------|---|
| Serial interface       | RS-232C (D-sub 9pin)  |
| Power supply           | AC 100 - 240 V, 50 / 60 Hz  |
| Loudspeaker            | 2 W Mono  |
| Dimensions (W x H x D) | 270 x 189 x 87 mm   |
| Weight                 | 2.2 kg  |
| Operation noise        | ECO mode 30 dB / normal 34 dB   |
| Specials               | BrilliantColor™, auto setup,<br>keystone correction, RJ45 via adapter<br>remote control with batteries, owners<br>manual, RGB- and power cable, softcase<br>ceiling mount, spare lamp,<br>RJ45 control adapter, camera c001           |
| Accessories            |   |
| Options                |   |
| Menu guidance          | 21 languages: English, French, German,<br>Italian, Spanish, Portuguese, Russian,<br>Swedish, Turkish, Polish, Danish, Czech,<br>Hungarian, Dutch, Finnish, Norwegian,<br>Romanian, Indonesian, Greek,<br>Chinese (simple/traditional) |

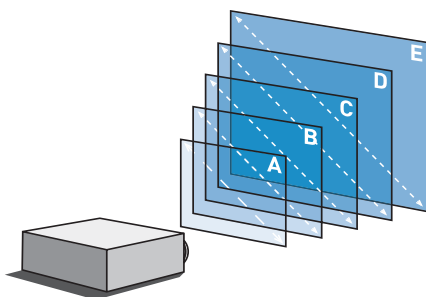

| Picture size | Projection distance |
|--------------|---------------------|
| A 0.76 m     | 1.15 - 1.28 m       |
| B 1.52 m     | 2.37 - 2.62 m       |
| C 2.54 m     | 3.98 - 4.41 m       |
| D 5.08 m     | 7.97 - 8.82 m       |
| E 7.62 m     | 11.88 m             |

