

9136

ImagePro 9136 Portable LCD Projector



The ImagePro 9136 is a bright (4000 lumens), high SXGA+ resolution and versatile LCD projector with network control, and is HDTV ready

9136 FEATURES

- 4000 lumen brightness
- SXGA resolution (1400 X 1050) 16:10
- Network capability RJ-45 for control, maintenance and security
- Easy Lamp access on top and 2000 hour hybrid filter on side
- Horizontal & vertical lens shift
- Optional bayonet style lenses available
- HDTV ready, HDMI input
- Audio pass-through for sound system operation when project is "off"



Manual Horizontal and Vertical Lens Shift for Perfect Image Alignment

THE ALL NEW

DUKANE

Education. Presentation. Inspiration.

www.dukcorp.com/av



Dukane's Connected Classroom

Convey Solutions by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with Convey.


Visit www.conveyclassrooms.com.

Call Dukane: 866.280.4298

ImagePro 9136

Portable LCD projector

Back Panel Connections

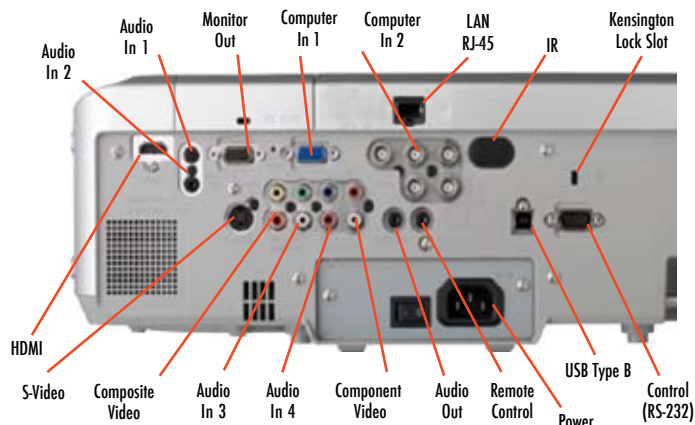

FEATURES

- SXGA+ (1400 x 1050) resolution
- 4000 ANSI lumens of brightness
- Full 720p display
- Network Capability, RJ-45, connection
- Whiteboard & Blackboard Modes
- Easy lamp access on top & 2000 hour filter access on side
- Monitor loopthrough & remote mouse control
- Optional bayonet style lenses available
- Audio pass-through when projector is off
- Horizontal & vertical lens shift
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

9136 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.9	3.5
60	48	5.9	7.2
80	64	8.0	9.6
100	80	10.0	12.0
120	96	12.0	14.5
150	120	15.0	18.0
200	160	20.1	24.2
300	240	30.2	36.4

Throw Ratio (distance to width) 1.5 to 1.8

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
866-280-4298
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av



toll-free
fax
e-mail

Specifications

Image Element	0.8" polysilicon TFT x3
Brightness	4000 ANSI lumens, 3200 (whisper mode)
Resolution	1400 x 1050 pixels (H X V), SXGA+
Contrast	1000:1 (using active iris)
Scanning Frequency	fh 15-106 kHz, fv 50-120 Hz
Lens	Manual zoom (F=1.7 to 1.9), 1.2X. Horizontal & vertical lens shift, manual
Lens Throw Ratio	1.5 -1.8 :1 throw distance to image width
Keystone Correction	Digital vertical & horizontal +/-40 & +/-20 deg.
Aspect Ratio	4:3 native, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA, SXGA, SXGA+ and UXGA Compressed, MAC13", MAC16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, HDTV 1080i/p, 720p, 576i, 480i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	275W UHB
Lamp Life	2000 hours (3000 hours Whisper Mode)
Audio	8W, 2 speakers, WOW Sound
Throw Distance	35" to 436"
Screen Size, diagonal	30" to 300"
Inputs, Video	(2) Component, RCA x 3, (BNC Shared) (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 (2) Audio, Stereo, RCA x 2, (L/R)
Inputs, Computer	(1) RGB Signal: D-sub, 15 pin, (1) RGB, BNC x 5 (shared component) (1) HDMI (2) Audio, Stereo mini jack, Stereo mini jack, Wired remote
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack x 1
Outputs, Control	9 pin D-sub Connector, RS232 USB type B (remote mouse only)
Network, Ethernet	RJ-45 port / 100Base-T
Security	Kensington slot, Security bar
Fan Level	35dB, (28dB in whisper mode)
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, 460 watt
Size (WxHxD)	16.5" x 5.5" x 12.6"
Weight	15.8 lbs.
Carton Size	21" x 14" x 19"
Shipping Weight	25 lbs.
Accessories Included	Remote control, batteries (AA), power cord, RGB cable, operator/safety manual.
Safety	UL60950, C-UL, FCC Part15, Class A, CE
Optional Accessories	Lamp 456-8949H, Ceiling mount, universal; RPA-U, Filter; MUO5661
Optional Lenses	FL-601 Short fixed, throw Ratio 0.8 SL-602 Short 1.7x zoom, throw ratio 1.2 to 2.0 LL-603 Long 2.0x zoom, throw ratio 1.9 to 3.9 UL-604 Long 1.8x zoom, throw ratio 3.9 to 7.4

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR