


|                             |   |
|-----------------------------|---|
| Projection system           | 3 LCD technology  |
| Brightness                  | 2200 lumens   |
| Contrast ratio              | 500:1   |
| Resolution                  | Native: XGA (1024 x 768)  |
|                             | Maximum: UXGA (1600 x 1200)   |
|                             | Aperture ratio: 4:3 native / 16:9 compatible  |
| Projecttion lens            | 1.2X Zoom lens, f=18.53 ~ 22.18mm, F/1.65 ~ F/1.93  |
| Lamp                        | 200W ultra high pressure Lamp   |
| Fan Noise                   | 30dB @ ECO  |
| Throw distance              | 40 to 300 inches (Approx.100"@2.88M)  |
| Throw ratio                 | 1.85~1.54   |
| Signal                      |   |
| Scan rate                   | Horizontal 31 to 92 kHz ; Vertical 48 to 120 Hz   |
| Color system                | NTSC / NTSC 4.43 / PAL (including PAL-M,N) / SECAM/PAL60  |
| Video signals compatibility | 480i/p, 576i/p, 720p, 1080i   |
| PC signals compatibility    | VGA, SVGA, XGA, SXGA, WXGA, UXGA  |
| Keystone correction         | Vertical +/- 30°  |
| Inputs / Outputs            |   |
| Input terminals             | RGB: Mini D-sub 15 pin x 1, DVI-I x 1<br>Composite Video: RCA x 1, S-Video x 1<br>Audio: mini jack x 2 , RCA(L,R) x 1<br>Component Video: RCA x 3 |
| Output terminals            | RGB: Min D-sub 15 pin x 1<br>Audio: mini jack x 1   |
| Mouse control port          | USB type B x 1  |
| Control terminals           | RS-232C D-sub 9 pin x 1   |
| LAN (RJ45)                  | Available   |
| Speaker                     |   |
|                             | Mono 8W X 1   |
| General                     |   |
| Dimensions (WxHxD)          | 325 x 97 x 260 mm   |
| Net Weight                  | 3.3 kg  |
| Power requirement           | AC 100 to 240 V, 50/60 Hz   |
| Power consumption           | Max. 285W , Standby < 2.6W  |
| Standard Accessories        |   |
|                             | Remote control (Card Type)  |
|                             | AC power cord (1.8M)  |
|                             | USB Cable (1.5M)  |
|                             | VGA cable (1.5M)  |
|                             | Owner's Manual CD   |
|                             | Quick Start Guide   |

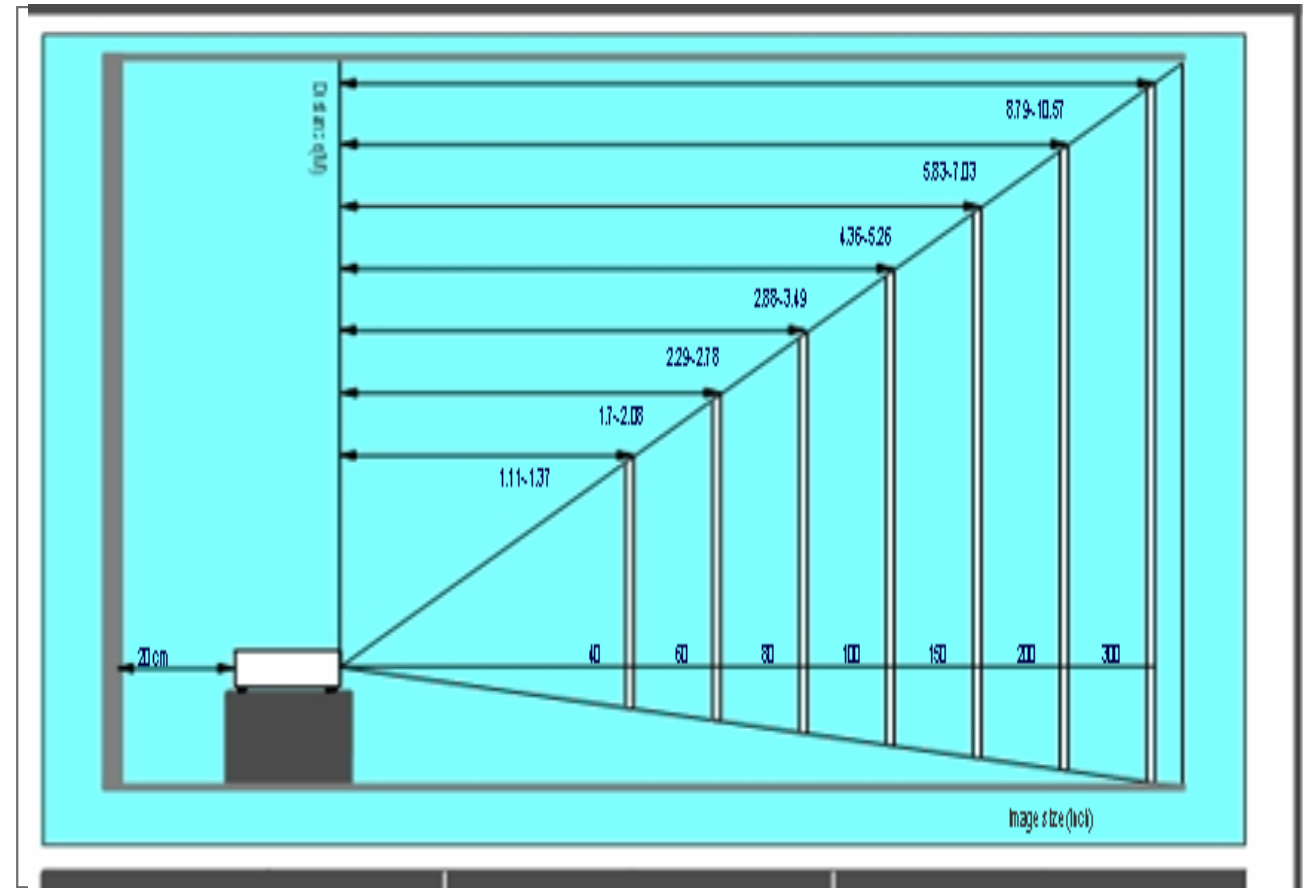

| Screen size (diagonal) |      | Distance (m) |      | Distance (feet) |       |
|------------------------|------|--------------|------|-----------------|-------|
| inch                   | m    | Tele         | Wide | Tele            | Wide  |
| 40                     | 1.0  | 1.37         | 1.11 | 4.49            | 3.64  |
| 50                     | 1.25 | 1.72         | 1.4  | 5.65            | 4.61  |
| 60                     | 1.5  | 2.08         | 1.7  | 6.81            | 5.58  |
| 70                     | 1.8  | 2.43         | 2.00 | 7.97            | 6.54  |
| 80                     | 2.0  | 2.78         | 2.29 | 9.13            | 7.51  |
| 90                     | 2.25 | 3.14         | 2.59 | 10.29           | 8.48  |
| 100                    | 2.5  | 3.49         | 2.88 | 11.45           | 9.45  |
| 150                    | 3.8  | 5.26         | 4.36 | 17.26           | 14.29 |
| 200                    | 5.1  | 7.03         | 5.83 | 23.06           | 19.13 |
| 250                    | 6.4  | 8.80         | 7.31 | 28.87           | 23.98 |
| 300                    | 7.6  | 10.57        | 8.79 | 34.76           | 28.82 |