


LC-WXL200

5,500 ANSI Lumens / WXGA / 3LCD
Conference Series Projector

LC-WXL200

5,500 ANSI lumens bright with 90% uniformity and a 1000:1 contrast ratio.
Native WXGA resolution. Compatible with inputs up-to UXGA and WUXGA.
Supports analog and digital video input in all color standards up-to 1080p.
3 panel LCD imaging delivers a rich, color-saturated picture.
10-bit color processing, for superior color reproduction.
Power zoom and focus lens. Optional wide-angle and telephoto lenses.
Vertical and horizontal power lens shift and digital keystone correction.
Accepts composite, component, and S-Video in all major standards.
Built-in 7 Watt amplifier and speaker system. Closed Caption decoding.
Wired LAN connection for monitoring and control. Optional PjNET interface.
Self-advancing cartridge air filter reduces maintenance: up-to 13,000 hour life.
Centered lens with 1-button release. Top-accessed lamp, side-accessed filter.
Mechanical shutter for true black screen. Corner keystone correction.
Picture-in-Picture & Picture-by-Picture. Wireless/wired remote with mouse.
3 year projector warranty.

Cost-Effective Large Venue Performance
High Contrast Durable Inorganic LCD Panels
Low Maintenance Long Life Cartridge Air Filter

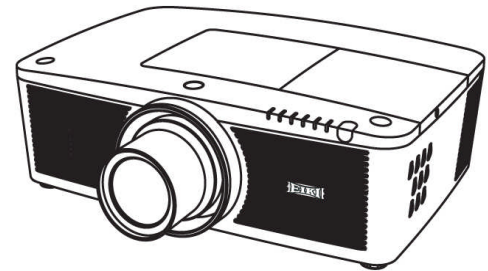

LC-WXL200

Included Accessories: Quick Start Guide, Owner's Manual on CD-ROM, Power Cord, VGA Computer Input Cable (Dsub15), Wireless/Wired Remote with Mouse Control (with 2 AAA Batteries), Wired Remote Cable (MiniStereo-MiniStereo), Lens Cover, Network Software on CD-ROM.

Optional Accessories: Replacement Lamp, Wideangle, Midrange and Telephoto Lenses, ATA-Style Shipping Case with Wheels and Telescoping Handle, Ceiling Mount, Ceiling Post & Plate, PjNET Network Interface.

SPECIFICATIONS: Model LC-WXL200

Brightness	up-to 5,500 ANSI Lumens (with standard LNS-S20 lens)	Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i/p
Contrast Ratio	up-to 800:1	Video Input Digital	480p, 575p, 720p, 1035i, 1080i/p
Illumination Uniformity (corner to center)	90%	Image Signal Inputs	
Resolution and Aspect Ratio	WXGA (1280x800), 16:10	1a. Analog Computer	Dsub15 x 1
Color Reproduction	10-bit (1.07 billion colors)	1b. Digital Computer / Digital Video (with HDCP)	HDMI® x 1
Projection Lamp	330 Watts NSHA	2. Analog Computer (RGBHV)	BNC x 5
Estimated Lamp Life	up-to 3,000 Hours	Component Video (Y, Pb/Cb, Pr/Cr), 3BNC	
Imaging System	0.75 in (19 mm) Inorganic LCD Panels x 3	Composite Video, 1BNC	
Total Pixels	3,072,000 ((1280x800) x 3)	3a. Component Video (Y, Pb/Cb, Pr/Cr)	RCA x 3
Scanning Frequency	Auto: H: 15-100 kHz; V: 48-100 Hz	Composite Video, 1RCA	
Pixel Clock	up-to 140 MHz	3b. S-Video	S-Video x 1
Lens	Changeable - Power Zoom and Focus	Audio Signal Inputs	
Lens Specs	Speed: f: 1.7-2.3; FL: 1.059-1.787 in (26.9-45.4 mm)	For Inputs 1 & 2	Stereo: MiniStereo x 1
Lens Ratios	Zoom Max:Min: 1.17:1; Throw:Width 1.7-2.89:1	For Input 3	Stereo: RCA x 2
Image Diagonal	40-400 in (102-1,016 cm)	Outputs	
Image Width	2.82-28.2 ft (0.86-8.6 m)	Computer Monitor	Dsub15 x 1
Throw Distance <<wide-tele>>	4.6-80.0 ft (1.4-24.4 m)	Audio Output	Variable, Stereo: MiniStereo x 1
Projector Elevation Adjustment (legs)	up-to 4° Up or Down	Amplifier	7 Watt
Maximum Pitch	up-to 360°	Speaker	2.0 x 3.5 in (5.0 x 9.0 cm) x 1 (Mono)
Vertical Lens Shift (% of image height)	up-to 60% Up or Down	Fan Noise	as low as 31 dBA
Horizontal Lens Shift (% of image width)	up-to 10% Left or Right	Cabinet Size (HxWxD)	6.45 x 19.29 x 14.61 in (16.4 x 49.0 x 37.1 cm) (excluding legs and lens)
Vertical Keystone Correction	Digital: up-to 40° Up or Down	Weight	21.4 lb (9.7 kg)
Horizontal Keystone Correction	Digital: up-to 20° Left or Right	Packaged Size (HxWxD)	12.5 x 26.8 x 22.9 in (31.8 x 68.1 x 58.1 cm)
Image Orientation	Normal, Reversed, Inverted	Packaged Weight	34.8 lb (15.8 kg)
Local Control / Power Management	Full Function / Auto Shutdown	Power Requirements	100-240V AC, 50/60 Hz
RS232 Control Port	Dsub9 x 1	Power Consumption	0.4 W in Eco Standby mode, up-to 490 W
Remote Projector Control	Wireless/Wired x 1	Heat	1.4 BTU/hr in Eco Standby mode, up-to 1,672 BTU/hr
Wired Remote Control Port	MiniStereo x 1	Power Cord	10 ft (3 m) Type C13, Detachable
LAN Port	RJ45 x 1	Electrical Safety Compliance	IEC / UL / cUL
Mouse Port	USB-B x 1	Electromagnetic Compatibility	FCC Class B
Optional Network Interface Port	Dsub25 x 1	Security Facilities	Kensington® Security Slot, Security Chain Hook
Computer Input in Pixels	up-to 1600x1200 (4:3), 1920x1200 (16:10)	Operating Temperature	41-104°F (5-40°C)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	User Maintenance	Replace Cartridge Air Filter, Change Lamp
Analog Wide Inputs	WUXGA, WSXGA, WXGA	UPC	4571194674408
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA	Limited Warranty: to the original end-use customer only	
Digital Wide Inputs	WUXGA, WSXGA+, WSXGA, WXGA+, WXGA	Projector	3 years
Image Signal Resizing	Smart Scaling Technology	Lamp	6 months ownership / 500 hours use (whichever occurs first)
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N		

Summary

Combining large venue projection features with durable components and reduced maintenance, here's a projector that delivers big screen performance on a budget. The EIKI LC-WXL200 comes complete with a wide-range power zoom and focus lens as standard equipment. Also available is the LC-WXL200L, offered without lens and ready for a selection from a suite of optional lenses.

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

EIKI® is a registered trademark of Eiki International, Inc. HDMI® is a registered trademark of HDMI Licensing LLC.

Specifications subject to change without notice. ©2010 Eiki International, Inc. Issued June 9, 2010.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com
Visit our website: <http://www.eiki.com>