

8403

ImagePro 8403 Portable DLP Projector



The ImagePro 8403 is a bright (2800 lumens) versatile DLP projector with Brilliant Color™, and HDTV compatible

8403 FEATURES

- 2800 lumen brightness
- XGA resolution (1024 X 768)
- Brilliant Color™ DLP Technology
- Filter Free Design
- Contrast ratio of 3000 to 1
- Lamp life of 3000/4000 hours
- HDTV ready, HDCP compliant
- Audio pass-through for volume control when operating
- Dukane 5-Year Warranty
- Rapid power ON and OFF

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

www.dukcorp.com/av



Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with Convey.


Visit www.conveyclassrooms.com.

Call Dukane: 866-280-4298

ImagePro 8403

Portable DLP projector

Back Panel Connections

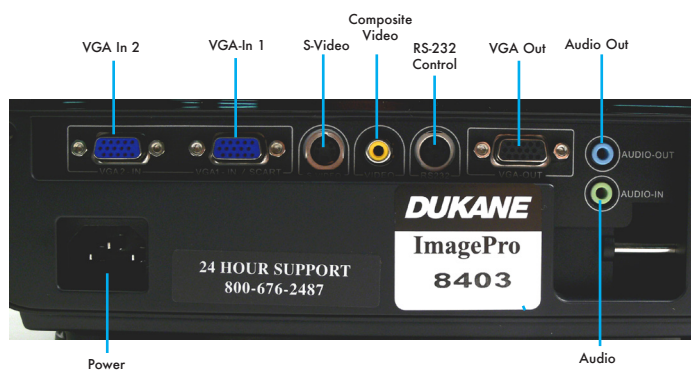

FEATURES

- XGA (1024 x 768) resolution
- 2800 ANSI lumens of brightness
- 3000:1 contrast ratio
- Status, control and maintenance over the network
- Speaker, 2 watt
- Brilliant color images
- Vertical keystone correction
- Only 5 lbs.
- No filter to service
- Controllable remotely
- Lamp life of 3000/4000 hours
- 5-Year Warranty

8403 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	5.2	5.7
60	48	7.8	8.6
80	64	10.4	11.5
100	80	13.0	14.3
120	96	15.6	17.4

Throw Ratio (distance to width) to 1.95 2.15

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
866-280-4298
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av



toll-free
fax
e-mail

#09096

Specifications

Image Element
Brightness
Resolution
Contrast
Scanning Frequency
Lens

8403

0.55" DND DLP "Brilliant Color"
2800 ANSI lumens (2100 econo mode)
1024 x 768 pixels (H X V), XGA
3000:1
fh 15-91 kHz, fv 25-85 Hz
Manual zoom, 1.1X

Lens Throw Ratio

1.95 -2.15 throw distance
to image width

Keystone Correction

Digital vertical +/-40°

Aspect Ratio

4:3 native, 16:9, 16:10 selectable

Computer

VGA, SVGA, XGA, SXGA, UXGA

Compatibility

Mac compatible

Offset

115%

Video Compatibility

NTSC, PAL, PAL-M
SECAM, HDTV1080i/p, 720p, 480i/p,

Closed Caption

CC1, CC2

Projection Modes

Front/rear/ceiling

Color Reproduction

1.07 billion colors

Lamp

185W, VIP

Lamp Life

3000 hours (4000 hours econo mode)

Audio

One 2 watt speaker

Throw Distance

4 to 33'

Screen Size, diagonal

30" to 300"

Inputs, Video

(1) S-video, Min DIN 4-pin,
(1) Composite video, RCA x 1

Inputs, Computer

(2) RGB Signal: D-sub, 15 pin,
(1) Audio, Stereo mini jack

Outputs Monitor

15 pin, D-sub (normal/standby)

Outputs Audio

Audio, Stereo mini jack x 1

Outputs, Other

3-pin, RS232

Security

Kensington slot, security bar,
keypad lock

Fan Level

32dB, (30dB in econo mode)

Operating Temperature

41 to 104 deg. F (5-40 deg C)

Power

AC 100-120V, AC220-240V
50/60 Hz, 255 watt

Size (WxHxD)

11.3" x 4" x 7.6"

Weight

5.0 lbs. (2.3 kg)

Carton Size

7" x 19" x 13"

Shipping Weight

12 lbs.

Accessories Included

Remote control, batteries (AA), power
cord, Computer cable, User manual,
lens cap

Safety

FCC, CUL, UL

Optional Accessories

Lamp 456-8403
Ceiling mount, universal, RPA-U
or PRG-UNV

Five (5) year limited warranty on parts and labor in North
America, lamp excluded (for other locations, local warranties
apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner
Program.