


MITSUBISHI X300 Projector

Model #LVPX300U

Professional Choice™

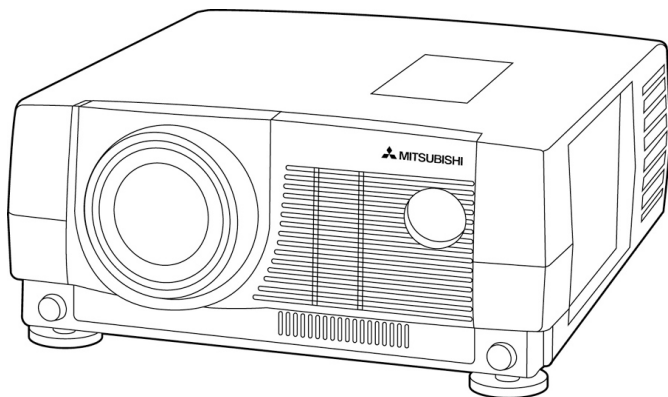

Key Features

CineView™ Built-in Line Doubler

The new built-in video line doubler technology ensures high-quality images with clear definition for finer, sharper moving images.

Picture-In-Picture

Mitsubishi's exclusive 2 Live PIP function displays dual moving images from two separate sources (PC and video) at the same time, thus doubling visual information and impact simultaneously.

Emergency Roadside Assistance

A Mitsubishi exclusive, industry's best, three-year Emergency Roadside Assistance program providing free replacement projectors delivered next business day for added peace of mind.

Specifications

Display Technology	1.3" x 3 Polysilicon LCD panel
Resolution	True XGA 1024 x 768 with compression for 1280 x 1024 SXGA maximum
Brightness	2000 ANSI Lumens (typical)
Colors	16,700,000 (32-bit)
Contrast Ratio	300:1 full on/ full off
Lens	Powered zoom & focus. All glass lens assembly. (Zoom ratio: 1.3:1.)
Picture Size	40" - 300" diagonal (aspect ratio 4:3 default; 16:9 video option)
Point'nZoom Digital Magnification	Digitally enlarge any portion of the entire projected image
Lamp	Type: 190-watt short-arc NSH lamp; with 2000 hours lamp life (user changeable)
Computer Compatibility	PC's, Macintosh® computers, workstations up to 1280 x 1024; supports sync on green
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL M, PAL N, SECAM, PAL 60, component video, HDTV
Input Terminals	<ul style="list-style-type: none">• RGB1; mini D-sub 15 pin x 1• RGB2; mini D-sub 15 pin x 1• PC Audio; stereo mini jack x 2• Video 1; BNC x 1 + SVHS x 1• Video 2; RCA x 1 + SVHS x 1• Video Audio; stereo RCA x 2
Output Terminals	RS-232C x 1 (direct command is available); Wired remote terminal x 1; USB terminal for mouse; PS2 (mouse function)
Scanning Rates	H: 15 - 92 kHz; V: 50 - 85 Hz; Dot Clock: 160 MHz
Audio	2 x 2W stereo with bass and treble adjustments
Remote Control/Laser Pointer	Wireless remote with direct input access. Full projector and computer control with built-in mouse and laser pointer.
Height Adjuster	Two quick release legs (0-7" variable)
Weight	13 lbs. (5.9 kgs)
Dimensions with legs (W x H x D)	11.8 x 5.0 x 14.5" (299 x 127 x 367 mm)
Power	AC 100 - 240V + 10%, 50/60 Hz
Power Consumption	280 watts
Kensington Lock-Ready	Protects from theft or preventable losses
Warranty	Three-year parts and labor, 90 days on light source lamp. Three-year Emergency Roadside Assistance program that ships free replacement projectors overnight for next business day delivery.

Mitsubishi Electronics America, Inc.
Presentation Products Division
9351 Jeronimo Road
Irvine, CA. 92618
Telephone: 888-307-0312
QWIKFAX: 800-937-2094



 **MITSUBISHI**
PRESENTATION PRODUCTS
Innovation On Displaysm