

Model	PRO5000SL
Technology	.79" 3LCD 
Brightness	5000 Lumens [standard] 4000 [economy mode]
Native Resolution	1024 x 768 [XGA]
Supported Resolution	1600 x 1200 [UXGA]
Colors	16.7 Million
Brightness Uniformity	85%
Projection Methods	Desktop front/rear; Ceiling front/rear
Contrast Ratio	500:1
Aspect Ratio	Native 4:3; Compatible 16:9
Image Size	40" to 300"
Projection Distance	4' to 36'
Lens	Manual Zoom and Focus
Keystone Correction	Vertical +/- 30 degrees
Horizontal Scan Rate	31 to 92 kHz
Vertical Scan Rate	48 to 120Hz
Audio Output	1 x 8W mono speaker
Lamp	330W normal 264W [eco mode]
Lamp Life	2000/3000 [standard/economy]
Remote Control	Full Function IR remote with laser
Noise Level	38dB standard 34dB economy mode
Power Supply	AC Input 100–240V
Power Consumption	450W <5W in Standby mode
Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible
Video Compatibility	EDTV (480p), HDTV (720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	Component [RCA x3], DVI-I, VGA-in, Composite Video, S-Video, RCA Stereo Audio-In [x2], Mini-Jack Audio-In [x2], VGA-Out, Mini-Jack Audio-Out
Service and Network Control	RS232X, RJ45, USB mouse Control
Weight	16.7 lbs 7.6 kg with lens
Dimensions [W x H x D]	18.9" x 6.1" x 14.4" [480 x 155 x 365 mm]
Operating Temperature	N/A
Standard Accessories	AC power cord, VGA cable, USB cable Remote Control with batteries, User manual [cd]
Optional Accessories	Non standard lenses, Replacement remote control. Harsh Enviroment Filter Component Video cable, DVI-D cable, Ceiling Mount, S-Video Cable

LENS INFORMATION

Standard Lens	1.5–1.8 standard lens, must be installed by factory		
Zoom Ratio	1.2		
F=	1.7–1.9	f=	26–34 mm
f=	26–34 mm		

Optional Lenses


PRO5000SL-911	1.8–2.3	Zoom Ratio 1.27
PRO5000SL-912	2.3–2.8	Zoom Ratio 1.25
PRO5000SL-913	3.1–41	Zoom Ratio 1.26




* Shown with lens

Key Features

- Five auto features [Auto Search, Auto Sync, Auto Ceiling, Auto Keystone and Auto Filter Alert]
- 5000 lumen with multiple lens options
- Email Monitoring
- Robust input Panel
- Optional harsh enviroment filter
- RJ45 Network ready
- Side Changing lamp and Filter
- Closed Caption

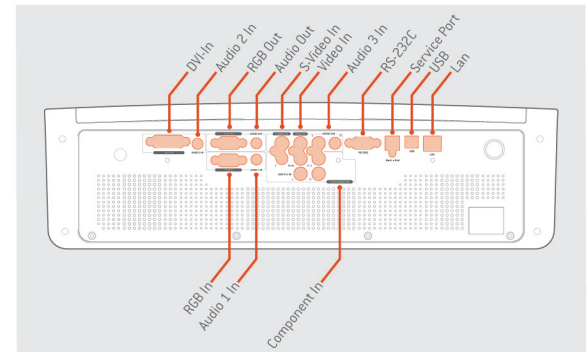

Throw Distance (ft)

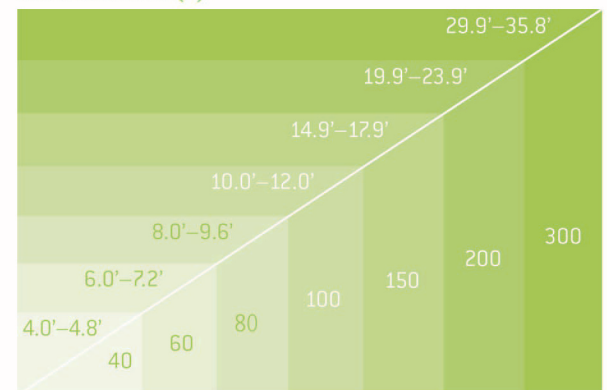

Diagonal Image Size (inches)

Outstanding Technical Support 24/7/365

And, of course, all **BOXLIGHT** products all come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2010 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528