

Portable XGA DLP® Projector

For Bright, Professional Presentations

PJD5226



The ViewSonic® PJD5226 is an advanced DLP® projector that is perfect solution for any conference room or classroom environments. Packed with XGA 1024 x 768 resolution, 2,700 lumen brightness and 15,000:1 contrast ratio, the projector delivers stunning high quality images that enhances your multi-media presentations. Characterized by its energy-saving DynamicEco™ mode, low maintenance, and a 6,000 hour long life lamp, the PJD5226 helps any institution lower total cost of ownership (TCO). With the new DynamicEco™ technology, presenters can control audiences' focus by dimming the brightness down to 30% with a simple click of the remote. The projector comes standard with multiple PC and video inputs, 120Hz/3D-Ready and integrated speaker. The PJD5226 is perfect for use in small business and education environments.

Bright in Virtually Any Setting With 2,700 lumens

Packs 2,700 lumens and with a high contrast ratio 15,000:1 (with DCR), your presentations are guaranteed to be vibrant even in the brightest office environments.

3D-Ready Powered by DLP® Link™ Technology




Get amazing 3D capabilities with DLP Link technology, at your disposal. The projector's embedded emitter function makes it easy to unlock 3D capabilities simply with a pair of DLP Link compatible glasses, such as the optional ViewSonic PGD-250 active shutter glass kit.

Ultra-Slim Design


At only 3.3 inches high and a lightweight 5.7 pounds, the PJD5226 is designed for true portability. It's so convenient to move from location to location.

DynamicEco™ Technology

Take command of presentations by dimming the main screen image - up to 70% - with DynamicEco™ button on the remote.



With DynamicEco™

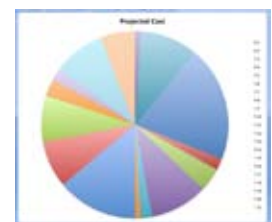

Without DynamicEco™

Portable XGA DLP® Projector

PJD5226



BrilliantColor™ Technology

Latest BrilliantColor technology delivers stunning all digital clarity with life-like colors, sharp graphics and outstanding images. The advanced 6-segment color wheel enhances the yellow color performance that is key to accurate and vivid color reproduction.



3-Seconds Fast on, 0-Second Instant Off

The Off-to-Go mode allows the PJD5226 to be turned on within 3 seconds and turned off immediately which increases efficiency in scheduling, setup and control.




Long Lamp Life up to 6000 Hours

The new advanced lamp technology extends the lamp life up to 6000 hours* and saves on maintenance costs.

Projection Distance		Screen Size (4:3)	
Feet	Meters	Inches	Meters
5.0 – 5.35	1.5 – 1.63	40	1.0
10.0 – 10.7	3.0 – 3.26	79	2.0
16.0 – 17.7	4.9 – 5.4	130	3.3
23.0 – 25.2	7.0 – 7.67	185	4.7
30.0 – 32.2	9.0 – 9.8	236	6.0
32.8 – 35.8	10.0 – 10.9	264	6.7
37.1 – 40.7	11.3 – 12.4	300	7.62

Optional Accessories

Replacement Lamp	RLC-070
Universal Ceiling Mount Kit	WMK-005
3D HD Video Processor.....	VP3D1
3D Active Shutter Glasses.....	PGD-250
Wireless Presentation Gateway	WPG-360
Soft Case.....	PJ-CASE-001
Extended 5-Year Warranty	PRJ-EW-07-02

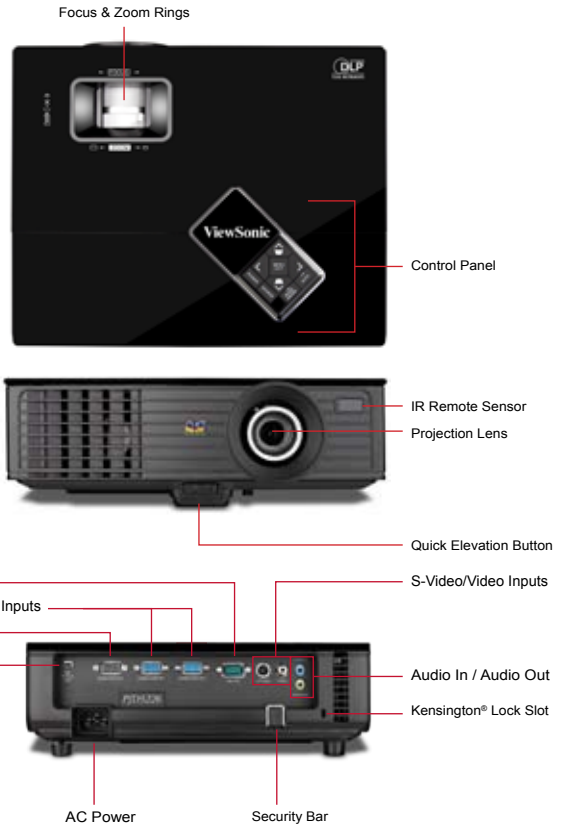

Specifications

DISPLAY	Type	0.55" Digital Micromirror Device (DLP™)
	Resolution	XGA 1024x768 (native)
	Lens	1.1x Manual optical zoom / Manual optical focus
	Keystone	Vertical digital keystone correction (+/- 40°)
	Size	30"–300" / 0.76m–7.6m (diagonal)
	Throw Distance	3.9ft–37ft / 1.2m–11.4m
	Throw Ratio	1.86-2.04:1
	Lamp	180 watt
	Lamp Life (Normal / Eco-mode)	5000 / 6000* hours
	Brightness	2700 Lumens
	Contrast Ratio	15,000:1 (w/ DynamicEco™)
	Aspect Ratio	4:3 (native), 16:9, Auto
Color Depth	30 bits, 1.07B Color (10+10+10)	
Color Wheel	6-seg RGBCYW/7200rpm	
Color Gamut	92% NTSC 1931 CIE	
INPUT SIGNAL	Computer and Video	NTSC M (3.58 MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B, D, G, K, K1, L), 480i and 576i, 480p and 576p, 720p, 1080i, 1080p
	Frequency	Fh: 31–100KHz, Fv: 48–120Hz
COMPATIBILITY	PC	VGA to UXGA
	Mac®	Up to SXGA+ (may require MAC adaptor)
CONNECTOR	RGB Input	15-pin mini D-sub (x2)
	RGB Output	15-pin mini D-sub
	Component	15-pin mini D-sub (x2, shared with RGB)
	Composite Input	RCA jack
	S-video Input	4-pin mini-DIN
	Audio Input	3.5mm mini jack
	Audio Output	3.5mm mini jack
AUDIO	Speaker	2W (x1)
	Control	RS-232 (DB-9)
POWER	Voltage	100–240VAC (Auto Switching), 50/60Hz (universal)
	Consumption	243W (typ) / <1W (stand-by mode)

CONTROLS	Basic	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
	OSD	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information (See user guide for full OSD functionality)
OPERATING CONDITIONS	Temperature	32°F–104°F (0°C–40°C)
	Humidity	10%–90% (non-condensing)
	Altitude	0–6,000 ft (1,800m), operational up to 10,000 ft (3048m)
NOISE LEVEL	Normal / Eco-mode	32dB / 29dB
	DIMENSIONS (W x H x D)	Physical
Packaging		13.6 x 7.6 x 15 in. / 345 x 192 x 380 mm
WEIGHT	Net	5.7 lb. / 2.6 kg
	Gross	9 lb. / 4.1 kg
REGULATIONS		CB, UL, cUL, FCC (including ICES-003), CE, UL-Argentina, NOM, GS, GOST-R, SASO, Ukraine, PSB, C-Tick, Korean-KC, CCC, CECP, WEEE, RoHS
WARRANTY		3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**

What's in the box?

ViewSonic PJD5226 projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard DVD (with User Guide).



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

*Lamp life may vary based on actual usage and other factors. **One year Express Exchange® service requires product registration. Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies, DLP® and DLP logo are registered trademarks of Texas Instruments and BrilliantColor™ is a trademark of Texas Instruments. Copyright © 2012 ViewSonic Corporation. All rights reserved. [16059-01B-04/12] PJD5226