

Empowered by Innovation



Professional Installation Projectors

PX Series

PX700W2, PX750U2 and PX800X2 digital projectors



www.necdisplay.com

Powerful installation projector equipped to take on the most demanding integration projects.



FLEXIBILITY ENABLES PERFORMANCE

- High-performance video processing/scaling, utilizing the Hollywood Quality Video processor, is designed for computer signals as well as standard or high-definition video. The technology produces superior video processing using pixel-based, motion-adaptive de-interlacing to remove undesirable motion artifacts typical of interlaced signals. This processing creates life-like images in applications such as video conferencing
- Bright enough for most applications: 7000 lumens (PX700W2), 7500 lumens (PX750U2), 8000 lumens (PX800X2) with a 6-segment (RGBYCW) color wheel. For higher video quality color reproduction, BrilliantColor™ technology and a second 6-segment (RGBYCM) color wheel (included) can dramatically increase color saturation at mid and low video levels, while optimizing color gain across the full color gamut
- VIDI technology, a Phillips innovation designed to work in conjunction with the color wheel, and uses a brilliant pulse to increase the brightness of the image and a dark pulse to increase the contrast ratio
- Lens memory controls lens attributes (zoom, focus, shift) based on input resolution and input selection (NP17ZL, NP18ZL, NP19ZL, NP20ZL, NP21ZL and NP31ZL)

INTEGRATED NETWORKING AND ASSET MANAGEMENT


- Integrated RJ45 connection for quick connection to the LAN (10/100 base-T capability)
- Optional high-speed wireless LAN IEEE 802.11b/g/n
- Desktop control allows you to securely transmit information wirelessly to the projector from a docking station or PC in another room
- Image Express Utility (IEU 2.0; compatible with Windows or Mac operating systems) dedicated projector software provides wired and wireless data transmission via peer-to-peer or over the network
- Broadcast mode allows you to send information from one computer to several projectors
- Windows Network Projector function within Windows Vista connects directly to networked projectors without the need for additional proprietary software
- Windows Remote Desktop function allows you to control a networked computer by connecting a USB mouse and keyboard directly to the projector's USB input
- Windows Network Drive Function displays multimedia files (.jpeg, .bmp, .png, .mpeg2 or .wmv9) in the Windows shared folder on a local network using the Viewer function—all without bringing your PC into the conference room
- Windows Media Connection Function displays multimedia files (.mpeg2, .jpeg or .wmv9) stored on the Windows Media Connect server or a local network using the Viewer function—all without bringing your PC into the conference room
- Crestron Roomview Connected™

SECURITY FEATURES PROVIDE PEACE OF MIND

- Cabinet control lock setting enables user to deactivate buttons on cabinet to prevent unwanted changes to projector settings
- Logo lock restricts changes to logo saved in projector memory
- Password protection restricts unauthorized use of projector
- Email notification informs the system administrator when the lamp approaches the end of its useful life


Tilt-Free Installation

PX Series models can be rotated freely (360°) in order to point up or down depending on the installation requirements.



Lens Shift

Enjoy greater installation flexibility with 50% vertical lens shift and +/- 10% horizontal lens shift. Ships lensless with a complete line of optional bayonet style lenses (7) for quick and easy exchange. Lens throw distances range from 2.6 to 179.8 feet.

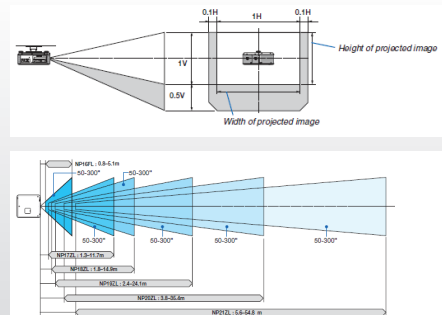


DESIGNED WITH THE ENVIRONMENT IN MIND

- **Extended lamp life with ECO Mode™ technology** increases lamp life up to 2500 hours, while lowering power consumption
- **Power management** enables projector to automatically turn off when an incoming signal is not detected from any of the inputs
- **Auto Power On** via the RGB (15-pin) input connector when a signal is detected from a computer
- **Carbon savings meter** calculates the positive effects of operating the projector in ECO Mode, which is encouraged by an optional message at startup. A green ECO Mode button on the remote control makes the switch easy.
- **Quick start** (3 to 4 seconds) lets you begin presenting in seconds while quick shutdown (immediate power off with no cooling required after shutdown) ensures efficient energy usage
- **Sleep timer** can be set to automatically turn off the projector at set countdown times
- **Low power consumption** (0.2W in stand-by mode) minimizes energy costs
- **Direct power off** provides instantaneous shutdown of the projector




2500-hour filter life

NEC is committed to designing its products to provide long lifecycles. This commitment even extends to components within its products, including the improved filter. This virtually maintenance-free filter reduces the frequency at which cleaning is required, thereby decreasing your total cost of ownership. Filter replacement is only required at the time the lamp is replaced.



Dual lamps


The PX Series features dual lamps, providing up to 8000 lumens of light output. You can combine dual lamps for up to four different light configurations (Normal Mode with dual or single lamp and ECO Mode with dual or single lamp) and settings depending on the ambient lighting conditions.



BUILT-IN SOFTWARE

Built-in stacking correction

The industry's first built-in stacking correction capabilities (up to four projectors) allows the projectors to boost an image's brightness up to 32,000 lumens, which is ideal for larger-sized screens and environments with heavy ambient light. This feature also prevents the complete loss of an image, which can happen when using only one projector.

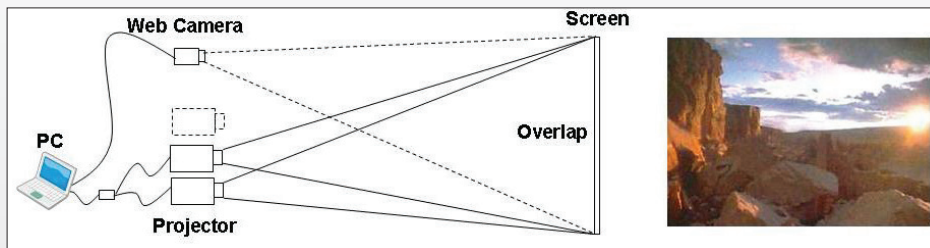


Built-in wall color correction presets

These provide for adaptive color tone correction to display properly on non-white surfaces.


On a green wall...



BEFORE
auto wall correction




AFTER
auto wall correction




PIP/Side-by-Side

This function allows two sources to be displayed on the screen at one time in either a picture-in-picture or side-by-side configuration.

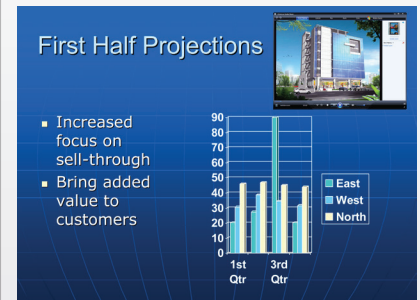

Edge blending

This function seamlessly blends multiple projected images to display a single high-resolution image.

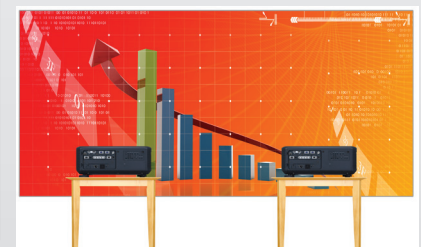

GET CONNECTED WITH A WIDE SELECTION OF INPUTS

- **Dual computer inputs** ensure quick switching between presentations


Remote control

Wired and wireless backlit remote allows you to adjust for complete control of the projector's menu structure in a well lit or dark environment. Direct controls such as lamp mode, aspect ratio, volume and input selection eliminates multiple button pushes.



DisplayPort

This input provides PX Series models with expanded connectivity with advanced technology.



HDMI™ input

Among the PX Series' wide selection of inputs is an HDMI w/HDCP for connecting to high-definition sources such as Blu-ray players, cable boxes, satellite receivers and personal computers.



USB Viewer

In instances when you'd prefer to leave your laptop behind for a presentation, PX Series projectors can deliver a solution. Using the presentation conversion software included with your projector, simply place your file onto a USB drive and plug it into the projector's USB port. This allows you to display images stored as .jpgs from optional USB memory.



Open Pluggable Specification (OPS)


The first industry-wide standardization in option slots simplifies installation, use and maintenance, while offering superior input flexibility.



ADVANCED SOFTWARE FEATURES

Cornerstone

Enhanced keystone correction allows for horizontal, vertical and diagonal image correction for aligned images even when the projector is set up at an angle to the screen.

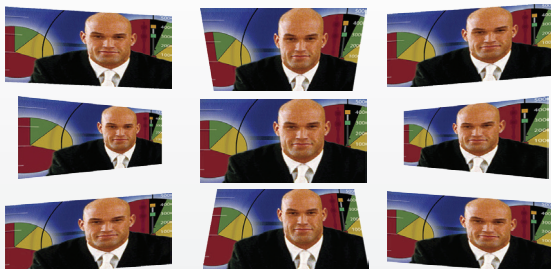

Virtual Remote™

Used via a network connection (wired/wireless), you can control the projector directly from a computer without the need for additional control cables.



Geometric Correction

Projecting an image isn't confined to a standard flat screen or wall with the NEC PX Series. Geometric correction allows these models to project an image on spheres, cylinders, corner angles and many more non-standard surfaces.



Specifications for PX700W2/PX750U2/PX800X2



UNIQUE FEATURES

3D Reform™ allows you to square the image by adjusting horizontally, vertically or diagonally when the projector cannot be placed parallel or perpendicular to the screen

Advanced AccuBlend™ ensures detailed images when non-native resolution sources are connected to the projector

AutoSense™ automatically syncs with any computer signal and features one-touch image optimization

64-step image magnification with location control

Discreet source keys for source selection

Remote diagnostics enable the user to monitor and make adjustments to the projector remotely

Built-in HTTP page for control and monitoring over a LAN network. Email notification of error messages or lamp end-of-life can be sent to remote locations.

WARRANTY

Registered owners receive a 3-year parts and labor warranty including the first year of InstaCare. The lamp is covered for one year or 500 hours, whichever comes first. InstaCare provides the original owner one year of either limited 3 business day repair/return or next business day exchange.

IN THE BOX

Remote control, remote control cable, batteries, power cord, RGB signal cable, lens cap, user's manual on CD-ROM, quick start guide, product registration card, wired and wireless network setup guide, lens anti-theft screw

ORDERING MODEL NUMBER

NP-PX700W2
NP-PX750U2
NP-PX800X2



3D Reform, Advanced AccuBlend, AutoSense and ECO Mode are trademarks of NEC Display Solutions. HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.
©2013 NEC Display Solutions of America, Inc. All rights reserved.
ver. 7.01.2014 25.NEC.80.GL.UN.087

NEC Display Solutions

500 Park Boulevard, Suite 1100
Itasca, IL 60143
866-NEC-MORE

www.necdisplay.com

OPTICAL Display Technology Light Output (lumens) Resolution Native Maximum Contrast Ratio (up to) Lamp Type Lamp Life (up to) Screen Size (diagonal) Throw Ratio NP06FL NP07ZL NP08ZL NP09ZL NP10ZL NP31ZL NP16FL NP17ZL NP18ZL NP19ZL NP20ZL NP21ZL Projection Distance Projection Angle Lens* Zoom Focus F-number, f-number NP06FL NP07ZL NP08ZL NP09ZL NP10ZL NP31ZL NP16FL NP17ZL NP18ZL NP19ZL NP20ZL NP21ZL Shift Keystone Correction	PX700W2: 0.65" DMD/PX750U2: 0.67" DMD/PX800X2: 0.7" DMD PX700W2: 7000 normal / Eco = approx. 80% of normal mode PX750U2: 7500 normal / Eco = approx. 80% of normal mode PX800X2: 8000 normal / Eco = approx. 80% of normal mode PX700W2: WXGA 1280 x 800 / PX750U2: WUXGA 1920 x 1200 PX800X2: XGA 1024 x 768 WUXGA 1920 x 1200 2100:1 (2) 400W AC / 320W eco 2000 hours normal / 2500 hours eco 50 to 300 in. / 1.3 to 7.6m 0.77:1 1.33 - 1.79:1 1.78 - 2.35:1 2.22 - 4.43:1 4.43 - 8.3:1 0.75 - 0.93:1 0.76:1 1.25 - 1.79:1 1.73 - 2.27:1 2.22 - 3.67:1 3.58 - 5.38:1 5.31 - 8.26:1 2.6 to 179.8 ft. / 0.8 to 54.8m 0° tele / 14.6° wide Power Power F=2, f=11.4mm F=1.8 to 2.3, f=19.3 to 25.8mm F=1.7 to 1.9, f=26 to 34mm F=2.1 to 2.9, f=32 to 83mm F=2.2 to 3.1, f=63.5 to 117.4mm F=1.96 to 2.3, f=11.3 to 14.1mm F=1.85, f=11.6mm F=1.85 to 2.5, f=18.7 to 26.5mm F=1.64 to 1.86, f=25.7 to 33.7mm F=1.86 to 2.48, f=32.9 to 54.2mm F=1.85 to 2.4, f=52.8 to 79.1mm F=1.85 to 2.48, f=78.5 to 121.9mm Power: 50% vertical, +/- 10% horizontal PX750U2: +/- 35° horizontal, +/- 30° vertical PX700W2/PX800X2: +/- 40° horizontal, +/- 30° vertical
SIGNAL COMPATIBILITY/CONNECTIVITY Scan Rate Horizontal Vertical Supported Video Standards SD/HD Video Signal Compatibility PC Signal Compatibility Macintosh Compatibility Input/Output Terminals RGB1 (analog) RGB2 (analog) RGB3 (analog) RGB4 (digital) RGB5 (digital) Video 1 Video 2 Option Slot Monitor Out External Control Sync Compatibility Networking USB	15 - 108 kHz 48 - 120 Hz NTSC, NTSC4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM 480i, 480p, 576i, 576p, 720p, 1080i, 1080p VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WUXGA Yes VGA 15-pin D-sub VGA 15-pin D-sub 5-BNC HDMI w/ HDCP DisplayPort w/ HDCP RCA S-Video HD/SD-SDI VGA 15-pin D-sub RS-232, IR, Wired LAN, DDC/CI, USB, Wireless LAN (optional) Separate Sync / Composite Sync / Sync on G RJ-45 and Wireless LAN (optional) Viewer
ELECTRICAL Power Requirements Input Current Power Consumption (Normal/ECO Mode/Standby/ Standby-Power Saving	100 - 240V AC, 50/60Hz 10.8A 1006W / 810W / 33W / 0.2W
MECHANICAL Installation Orientation Dimensions (WxDxH) Net Weight Fan Noise Regulations	Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear 19.8 x 20.3 x 7.6 in. / 504 x 516 x 192mm 43.4 lbs. / 19.7 kg 43 dB normal / 38 dB eco USA: UL60950-1, FCC Part15 Class B / Canada: CSA60950-1, ICES-003 Class B
ENVIRONMENTAL Operating Temperature Humidity Storage	32° - 104°F / 0° - 40°C 20-80% non-condensing -14° - 122°F / -10° - 50°C
ACCESSORIES NP06FL NP07ZL NP08ZL NP09ZL NP10ZL NP31ZL NP16FL NP17ZL NP18ZL NP19ZL NP20ZL NP21ZL NP02LM1 SB-01HC SB-04HC SB-06WC PX750CM PXCase-01 RMT-PJ35 NP01PW1 RGBCBL-PJPX NP02FT SCP200 NP22LP N8000-8830 NECEW2-I NECEW1-I ADVEXON1-I ADVEXON2-I	0.77:1 fixed short throw lens for PX700W2/PX800X2 1.33 - 1.79:1 zoom lens for PX700W2/PX800X2 1.78 - 2.35:1 zoom lens for PX700W2/PX800X2 2.22 - 4.43:1 zoom lens for PX700W2/PX800X2 4.43 - 8.3:1 zoom lens for PX700W2/PX800X2 0.75 - 0.93:1 zoom lens 0.76:1 fixed short throw lens 1.25 - 1.79:1 zoom lens w/lens memory 1.73 - 2.27:1 zoom lens w/lens memory 2.22 - 3.67:1 zoom lens w/lens memory 3.6 - 5.4:1 zoom lens w/lens memory 5.3 - 8.3:1 zoom lens w/lens memory Wireless LAN module SD-SDI input card HD/SD-SDI input card OPS wireless display media player Ceiling mount ATA-certified case for shipping and secure storage Replacement remote control Replacement power cable Replacement RGB signal cable Replacement filter Suspended ceiling plate Replacement lamp NEC OPS PC with Intel Core i5, 320GB Hard Drive, Windows Embedded Standard 7 Extends term of parts and labor warranty to 5 years Extends term of parts and labor warranty to 4 years Extends term of InstaCare service program to 2 years Extends term of InstaCare service program to 3 years

* Lens does not ship with the projector.

Additional accessories are available, including screens, carts, mount accessories and replacement cables. Visit www.necdisplay.com for details.

Empowered by Innovation

