



Key Features

Amazing color accuracy | Secure MHL/HDMI port |
 Network capable | Smart design | Enhanced sound



Product Description


The ViewSonic® LightStream™ PJD6352LS networkable projector features 3500 lumens, native XGA 1024x768 resolution, and an intuitive, user-friendly design. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment, while SonicExpert™, ViewSonic's proprietary sound enhancement technology, powers a 10W speaker to deliver incredibly clear and audible sound. PortAll™—a hidden compartment with an integrated and secure MHL/HDMI port—lets you discretely stream multimedia content from a wireless dongle, or lets you connect to other devices via an HDMI cable. A cable management hood eliminates unsightly cable clutter, and a top lamp door enables easy access for lamp maintenance. A short throw lens with a 0.61 throw ratio offers large projection images for smaller rooms. With HV keystone, corner adjustment, and easy network management, the PJD6352LS provides flexible setup. Designed with smarter features and extensive connectivity, the networkable short throw PJD6352LS is ideal for use in education and corporate environments.

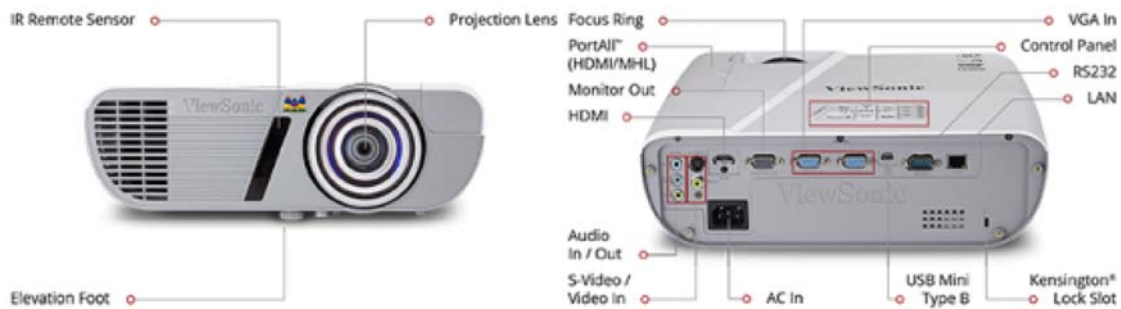

1024 x 768
RESOLUTION



3,500
LUMENS



0.61
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP
Resolution Type:	XGA
Resolution:	1024 x 768
Brightness (ANSI Lumens):	3,500
Throw Distance:	2.0 – 10.1 ft. / 0.61 – 3.09m
Throw Ratio:	0.61
Display Size (in.):	50 - 250 in. / 1.27 - 6.35 m
Keystone:	Vertical (± 30°) / Horizontal (± 30°)
Lens:	Fixed zoom / manual optical focus
Light Source (watt):	210
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	10000
Color Depth:	30 bits, 1.07B Color (10+10+10)
Dynamic Contrast Ratio:	22000:1
Aspect Ratio:	4:3 (native), 16:9

Video Signal:

Frequency Horizontal:	15–102KHz
Frequency Vertical:	23.–120Hz

Compatibility:

PC Resolution (max):	1920 x 1080
Mac® Resolution (max):	1920 x 1080

Connector:

Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS-232)(1), HDMI 1.4(1), HDMI MHL(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1), RGB Input(15-pin mini D-Sub (x2))

Audio:

Internal Speakers:	10W
--------------------	-----

Power:

Voltage:	100~240VAC (Auto Switching), 50-60Hz (universal)
Consumption (max):	330W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit,right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Picture, Source, System Setup (Basic), SystemSetup (Advanced), Information(See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0–40° C)
Humidity (non-condensing):	10-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net Without Stand (lbs):	4.9
Gross (lbs):	8.8

Weight (metric):

Net Without Stand (kg):	2.2
Gross (kg):	4

Dimensions (metric) (WxHxD):

Packaging (mm):	410 x 225 x 450
Physical Without Stand (mm):	316 x 103.7 x 228

Dimensions (imperial) (WxHxD):

Packaging (in.):	16.0 x 8.85 x 17.72
Physical Without Stand (in.):	12.44 x 4.08 x 8.98

General:

Regulations: CB, TUV-GS, UL/cUL, FCC (including ICES-003), CE,C-Tick, Mexico Energy, EAC, UkrSEPRO/EMC DOC,UL COC, TUV-S, PSB, KCC, SASO, CCC, WEEE,RoHS, REACH, SVHC, ErP

PACKAGE CONTENTS: PJD6352LS projector, power cable, VGA cable, remote control with laser (batteries included),Quick Start Guide, ViewSonic Wizard CD (with User Guide)

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907780918

Accessories: