

proxima®

Own your audience.



ULTRALIGHT DX2

the brightest of the lightest

ULTIMATE PORTABILITY

all the features you need
in a five-pound package

THE DLP™ DIFFERENCE

displays photo-realistic color
and smooth video



MODULAR VIDEO

lighten your load even more
when you don't need video

DAZZLING DETAIL

XGA resolution provides the
image detail and compatibility
you need

FREE REPLACEMENT

two years of free ProXchange
service for extra security

ZOOM IN

position the DX2 anywhere
and zoom in or out

PROXIMA ULTRALIGHT® DX2 FEATURES

Making high-impact presentations on the go just got easier and more affordable, with Proxima's UltraLight DX2. Now you can deliver high-resolution data and video images from a sleek projector that weighs just five pounds. The UltraLight DX2 has all the features you need for your portable presentations and small meetings, at a price that's very attractive.

- at just five pounds, it offers the utmost in portability without sacrificing important features
- bright enough for meeting rooms and small conference rooms at 1000 ANSI lumens
- zoom lens offers flexibility in set up, letting you position the projector where you want it and adjust the image size accordingly
- XGA (1024 x 768) resolution lets you display your most detailed images with clarity, and provides compatibility with a wide range of computers
- Digital Light Processing™ technology from Texas Instruments produces photo-realistic images and film-like video
- modular video component offers the flexibility to connect to a video source or to remove the component when displaying computer images only, for the lightest load possible
- includes easy to use remote control with laser pointer and soft carrying case
- comes with 90-day lamp warranty and two years of free ProXchange™ service, for overnight projector replacement in the unlikely event your DX2 is in need of repair
- an affordable and stylish solution for corporate presenters, meeting go-ers, consultants, and professionals who display detailed data or video images

WHAT'S INCLUDED

MODEL DX2 INCLUDES:

- Remote control with mouse control and laser pointer
- U.S. and international power cords
- Product documentation
- Computer VGA cable, computer mini-plug to mini-plug audio cable, Mac adapter, AV cable, S-video cable
- Soft carrying case
- Lens cap


[Presentation solutions]

DX2 TECHNICAL SPECIFICATIONS

Native Resolution	• XGA (1024 x 768)
Resolution Supported	• VGA (640 x 480), SVGA (800 x 600), XGA (1024 x 768), SXGA (1280 x 1024)
Brightness	• 1000 ANSI lumens
Brightness Uniformity	• > 75%
Contrast Ratio	• 250 to 1
Computer Compatibility	• IBM PC or compatibles Apple Macintosh
Video Compatibility	• NTSC, NTSC 4.43, PAL, PAL-N, PAL-M, SECAM
Display Technology	• single chip DLP
Number of Colors	• 16.7 million colors
Input Sources	• 1 composite video, 1 S-video
I/O Interface	• PS/2
H-Sync Range	• 31-85 kHz
V-Synch Range	• 55-90 Hz
Bandwidth	• up to 140 MHz
Keystone Correction (Digital)	• ± 7°
Projection Lens	• focal length: 31 to 40 mm, F 2.8 to 3.1
Projection Distance	• 4.9 ft. to 16.4 ft. (1.5 m to 5 m)
Zoom	• 1.3:1 manual zoom
Aspect Ratio	• 4:3
Image Size (diagonal)	• 1.2 ft. to 11.5 ft. (0.4 m to 3.5 m)
Throw Ratio	• 2M/45 in.
Projection Method	• front/rear, desktop/ceiling
Audio	• 2 watt mono
Remote Control	• Full function remote with mouse control and laser pointer
Lamp (Life)	• 150 watt (1,500 hours)
Dimensions	• 8.25 in. W x 10.0 in. L x 3.2 in. H 20.9 cm W x 25.4 cm L x 8.0 cm H (base unit only)
Weight	• 5.2 lbs. (2.4 kg)
Power Consumption	• 250 watts
Power Requirements	• 100 to 240V at 50/60 Hz
Operating Temperature	• 50° to 104° F (10° to 40° C)
On-Screen Menu Languages	• English, French, Spanish, Portuguese, German, Italian, Chinese
Audible Noise	• < 40 db
Approvals	• FCC Class B, UL, c-UL, CE, TUV
Warranty	• two years on parts and labor • 90 days limited on lamp • two years of ProXchange replacement service

UltraLight DX2 Set Up

Position the UltraLight DX2 anywhere in the room.

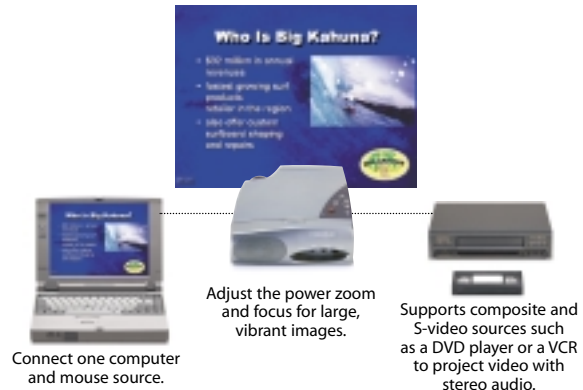

ORDERING INFORMATION

Model Number	
DX2	For worldwide use
Optional Accessories	
CASE-002	Carry-on rolling soft case
CASE-162	Compact rolling hard case
CASE-163	Deluxe rolling hard case
A650	50 in. portable tabletop screen
LAMP-022	150 watt lamp

DX2 PROJECTION DISTANCES / IMAGE SIZES

Projection Distance		Image Size (Diagonal)			
		Minimum		Maximum	
4.9'	1.5 m	1.2'	0.4 m	3.5'	1.1 m
6.5'	2 m	1.5'	0.5 m	4.7'	1.4 m
8.2'	2.5 m	1.9'	0.6 m	5.8'	1.8 m
9.8'	3 m	2.3'	0.7 m	6.9'	2.1 m
11.4'	3.5 m	2.7'	0.8 m	8.7'	2.7 m
13.1'	4 m	3.1'	0.9 m	9.2'	2.8 m
14.7'	4.5 m	3.4'	1.1 m	10.3'	3.1 m
16.4'	5 m	3.8'	1.2 m	11.5'	3.5 m

proxima

Own your audience.

Main Office: 9440 Carroll Park Drive, San Diego, CA 92121-2298
(858) 457-5500, FAX (858) 457-9647, (800) 447-7692 (U.S. and Canada)

European Office: K.G. Meldahlsvei 9, Postboks 1403
N-1602 Fredrikstad, Norway, [tel] +47 69 34 01 55, [fax] +47 69 34 06 32

www.proxima.com
www.presentersuniversity.com

Proxima and Proxima UltraLight are registered trademarks and ProXchange is a trademark of Proxima Corporation. Other trademarks are property of their respective owners. ©2000 Proxima Corporation. All rights reserved. Specifications are subject to change without notice.
6/00 709-00818-2 DX2 data sheet.qxd