

2000 ANSI Lumens

SVGA Resolution

Multiple Inputs



CP-670k

For the **MOBILE PRESENTER ON A BUDGET**, the **BOXLIGHT CP-670k** projector is the right choice. The CP-670k is the latest in a line of **AFFORDABLE, HIGH-PERFORMANCE PROJECTORS**. Weighing a small **6.8 LBS/3.1KG**, yet loaded with features, it's the **PERFECT TRAVELING COMPANION**. You can **DIGITALLY ENHANCE A SPECIFIC AREA ON THE SCREEN** and polish your presentations with the **DIGITAL ZOOM IMAGING** and **DIGITAL KEYSTONE ADJUSTMENT** features. And with **2000 LUMENS AND NATIVE SVGA RESOLUTION**, your presentations will sparkle. Check out the CP-670k and see all that you can get for your money. Call the digital projector specialists at BOXLIGHT today!

19332 Powder Hill Place
Poulsbo, WA 98370
800.762.5757
360.779.7901
www.boxlight.com


BOXLIGHT
Presenting a Better Way.

© 2004 BOXLIGHT Corporation. BOXLIGHT and the BOXLIGHT logo are registered trademarks of BOXLIGHT Corporation. All other marks are the property of their respective owners. Specifications are subject to change without notice. CP670k - 10.04

B O X L I G H T

CP-670k

p r o j e c t o r

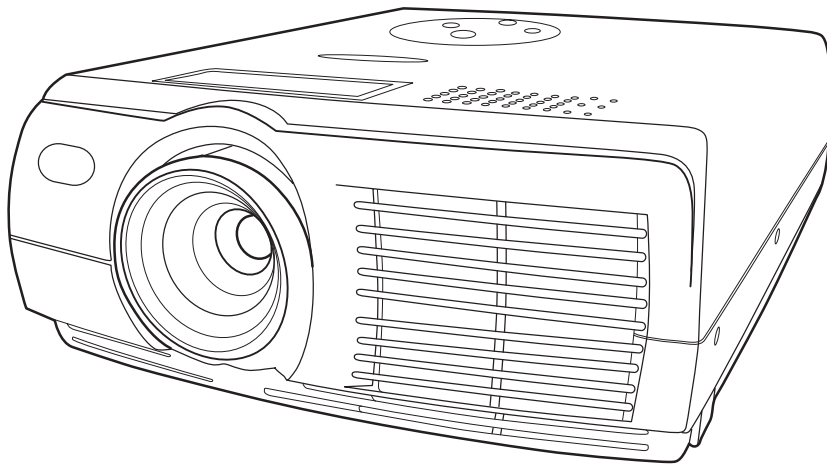

- True 800 x 600 SVGA with compression up to 1280 x 1024 SXGA.
- Portable at 6.8 lbs. / 3.1kg.
- 2000 ANSI lumens
- Full function laser remote mouse.
- Digital zoom imaging.
- Versatile capabilities with keystone correction, freeze, blank and PIP function on remote.
- Multiple inputs including RS232 and DVI-I.
- HDTV compatibility.
- FCC Class B certification.
- 24/7 telephone technical support.



To contact BOXLIGHT

Direct	800.762.5757
Education	800.689.6676
Government	800.497.4009
International	360.779.7901
Boxlight Rentals Inc.	800.736.6954
Toll Free Fax	888.353.4242
Internet	www.boxlight.com

* Leasing Option Available!

Resolution:	800 x 600 SVGA with compression up to 1280 x 1024 SXGA	Diagonal Image Size:	40 - 200" / 1.33 -6.67m
Brightness:	2000 ANSI lumens	Keystone:	Vertical digital adjustment +/-15°; Horizontal +/-10°
Lamp:	165W EHPL lamp	Adjustments:	On-board and a remote
Display Type:	(3) 0.79" TFT polysilicon LCDs	Power Supply:	100-120/ 200-240V; 50/60Hz auto switching
Contrast Ratio:	450:1	Power Consumption:	230W
Colors:	16.7 million	Compatibility:	SXGA, XGA, SVGA, VGA, Mac
Aspect Ratio:	4:3, 16:9 compatible	Weight:	6.8 lbs. / 3.1kg
Inputs:	COMPUTER: (1) DVI-I digital/analog ; VIDEO: (1) S-Video, (1) Composite Video; AUDIO: (1) computer mini-jack audio	Dimensions (H x W x D):	3.66 " x 11.6" x 9.1" / 9.29 x 29.4 x 23.1cm
Outputs:	COMPUTER: (1) 15-pin computer monitor loop-through, (1) control port for mouse operation; AUDIO: (1) computer mini-jack audio	FCC Rating:	Class B Certification
Audible Noise:	37dB	Warranty:	Two-year parts and labor (120-day or 500-hours lamp warranty)
Audio:	Built-in 2-watt speaker	Accessories Included:	Laser remote control, User manual, Power cord, S-Video Cable, RCA Video Cable, DVI to D-Sub Cable, RCA to PC Audio Cable, PC to PC Audio Cable, USB Cable, Lens cap, Two year parts and labor warranty
Video:	PAL, PAL-M, PAL-N, SECAM, NTSC, 1080i, 720p, 480p, 480i	Optional Accessories:	One year extended warranty, ceiling mount plate, ceiling mount suspension pole, ceiling round flush mount kit, RS232 Cable, Soft carry case, hard carry case, Kensington Lock kit, ATA case, MAC adapter
Scan Frequency:	15 - 80kHz		
Vertical Refresh Rate:	43 - 85Hz		
Projection Lens:	Manual zoom and focus; 1.23 zoom ratio, F/1.7-2.1, f=26 ~ 32mm		