

proxima®

Own your audience.



ULTRALIGHT LX1

affordable XGA ultraportable

DISTINCT DETAILS

XGA (1024 x 768) resolution provides the image detail and compatibility you need

LIGHTWEIGHT CHAMPION

at just 8.1 pounds, it's perfect for presentations on the road

ZOOM IN

1.3:1 zoom lets you set up anywhere in the room

LOW COST OF OWNERSHIP

4,000-hour lamp lasts ten years*, saving costs and hassles.

BRILLIANT IMAGES

800 ANSI lumens for lights-on presentations



actual size: 9.3 in. (W) x 13.6 in. (L) x 3.9 in. (H)

PROXIMA ULTRALIGHT® LX1 FEATURES

Looking for a high-resolution ultraportable projector at an affordable price? Proxima's UltraLight LX1 is here and ready to hit the road. With 800 ANSI lumens of brightness, this XGA (1024 x 768) projector gives mobile presenters an economical solution for displaying vibrant, detailed images. Proxima's UltraLight LX1 will make you and your presentations shine.

- XGA (1024 x 768) resolution shows off your most detailed images with clarity
- 800 ANSI lumens of brightness lets you present in well-lit environments
- 4000-hour lamp life means low cost of ownership and approximately ten years of use*
- a lightweight 8.1 pounds makes it easy to take your high-resolution presentations with you
- 1.3:1 zoom lens gives you the flexibility to set up anywhere in the room
- comes with a carrying case and remote control

* Lamp life is based on usage of 8 hours a week. Individual lamp life may materially vary.

WHAT'S INCLUDED

MODEL LX1 INCLUDES:

- Remote control with mouse control and laser pointer
- Power cord
- Product documentation
- Computer cable, AV cable
- Soft carrying case
- Lens cap
- USB mouse cable


[Presentation solutions]

LX1 TECHNICAL SPECIFICATIONS

Display Technology	• 0.9 in. Polysilicon LCD x 3 with micro lens array
Resolution	• XGA (1024 x 768)
Resolution Supported	• VGA (640 x 480) • SVGA (800 x 600) • XGA (1024 x 768) • SXGA (1280 x 1024) • MAC (640 x 480 - 1280 x 1024)
Number of Colors	• 16.7 million colors
Brightness	• 800 ANSI lumens
Contrast Ratio	• 300:1 (full-on, full-off)
Computer Compatibility	• IBM PC or compatibles • Apple Macintosh
Video Compatibility	• NTSC 3.58, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, MESECAM
Input Sources	• 1 computer, 1 video, 1 S-video, 1 computer audio, 1 video audio
Output Sources	• 1 monitor out, 1 audio line out
H-Sync Range	• 15-100 kHz
V-Sync Range	• 43-130 Hz
Bandwidth	• 140 MHz
Aspect Ratio	• 4:3
Image Size (Diagonal)	• 1.8 ft. to 20.8 ft. (0.5 m to 6.3 m)
Projection Lens	• Manual zoom and focus 1.3:1 ratio • Focal length: 38 mm to 50 mm, f/1.8-2.1
Projection Distance	• 3.6 ft. to 32.8 ft. (1.1 m to 10 m)
Keystone Correction (Optical)	• 10° fixed
Projection Method	• front/rear, desktop/ceiling
Lamp (Life)	• 120 watt UHP (4,000 hours)
Audio	• 2 x 1 w stereo
Remote Control	• Projector and mouse control with laser pointer
Dimensions	• 9.3 in. W x 13.6 in. L x 3.9 in. H 23.6 cm W x 34.7 cm L x 9.9 cm H
Weight	• 8.1 lbs. (3.7 kg)
Power Consumption	• <180 watts
Power Requirements	• 90V-250V at 47/63 Hz (+/- 10%)
Operating Temperature (Sea Level)	• 50°- 95°F (10°- 35°C)
On-Screen Menu Languages	• English, German, French, Spanish, Portuguese
Audible Noise	• 38db
Approvals	• FCC Class A, UL, C-UL, CE
Warranty	• Two years on parts and labor (excluding lamp)

UltraLight LX1 Set Up

Position the UltraLight LX1 anywhere in the room.

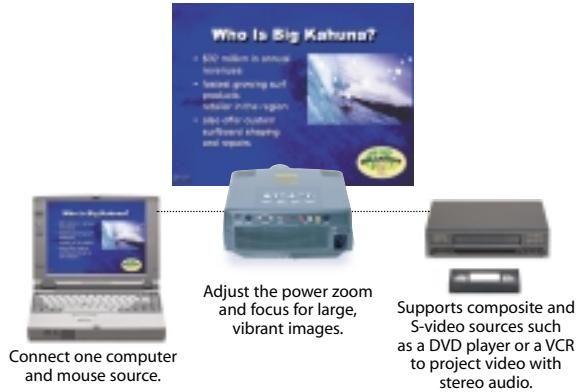

ORDERING INFORMATION

Model Number	
LX1	For worldwide use
Optional Accessories	
CASE-001	Rolling soft case
CASE-002	Compact rolling soft case
CASE-102	Deluxe rolling hard case (checkable/shippable)
CASE-103	Compact rolling hard case (checkable/shippable)
A650	50" portable tabletop screen
LAMP-013	120-watt UHP lamp
contact your dealer	S-video cable, Mac adapter, PC speaker cable, computer audio cable

LX1 PROJECTION DISTANCES / IMAGE SIZES

Projection Distance		Image Size (Diagonal)			
		Minimum		Maximum	
3.6'	1.1 m	1.8'	0.5 m	2.3'	0.7 m
6.6'	2.0 m	3.3'	1.0 m	4.2'	1.3 m
13.1'	4.0 m	6.7'	2.0 m	8.3'	2.5 m
19.7'	6.0 m	10'	3.0 m	12.5'	3.8 m
26.2'	8.0 m	13.3'	4.1 m	16.7'	5.1 m
32.8'	10.0 m	16.7'	5.1 m	20.8'	6.3 m

proxima®
Own your audience.

Main Office: 9440 Carroll Park Drive, San Diego, CA 92121-2298
(858) 457-5500, FAX (858) 457-9647, (800) 447-7692 (U.S. and Canada)

European Office: K.G. Meldahlsvei 9, Postboks 1403
N-1602 Fredrikstad, Norway, [tel] +47 69 34 01 55, [fax] +47 69 34 06 32

www.proxima.com